



# Financial Close Guide

---

PV710 SV101

Copyright © 2022 OneStream Software LLC. All rights reserved.

Any warranty with respect to the software or its functionality will be expressly given in the Subscription License Agreement or Software License and Services Agreement between OneStream and the warrantee. This document does not itself constitute a representation or warranty with respect to the software or any related matter.

OneStream Software, OneStream, Extensible Dimensionality and the OneStream logo are trademarks of OneStream Software LLC in the United States and other countries. Microsoft, Microsoft Azure, Microsoft Office, Windows, Windows Server, Excel, .NET Framework, Internet Information Services, Windows Communication Foundation and SQL Server are registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. DevExpress is a registered trademark of Developer Express, Inc. Cisco is a registered trademark of Cisco Systems, Inc. Intel is a trademark of Intel Corporation. AMD64 is a trademark of Advanced Micro Devices, Inc. Other names may be trademarks of their respective owners.

# Table of Contents

Overview .....	1
Setup and Installation .....	2
Dependencies .....	2
Select the OneStream Financial Close Location .....	2
Create the OneStream Development Application .....	3
Application Server Settings .....	3
Configure the OneStream Application Server .....	3
Install OneStream Financial Close .....	4
Set Up OneStream Financial Close .....	5
Create Tables .....	5
Turning Off Dashboards .....	6
Package Contents .....	7
Account Reconciliations .....	7
Transaction Matching .....	9
Edit Transformation Event Handler Business Rule .....	10
Account Reconciliations .....	12
Settings .....	12
Global Setup .....	13
Control Lists .....	18

## Table of Contents

---

Templates .....	22
Access Control .....	26
Certifications .....	32
Uninstall .....	33
Reconciliation Administration .....	33
Reconciliation Definition .....	34
Reconciliation Inventory .....	37
Account Groups .....	47
Tracking .....	55
BalCheck .....	56
AutoRec .....	57
Notifications .....	61
Security .....	64
Reconciliations Global Admin vs. OneStreamAdmin vs. Local Admin .....	64
Workflow Profile Security .....	67
Access Groups and Reconciliation Inventory Security .....	67
Workflow and Reconciliation Filtering .....	67
Roles .....	67
Segregation of Duties .....	71
Dashboard Security .....	71

## Table of Contents

---

Using Account Reconciliations .....	71
Workflow Actions .....	72
Reconciliations Page .....	74
Reconciliation Workspace .....	80
Analysis and Reporting .....	100
Scorecard .....	100
Analysis .....	101
Reports .....	103
Multi-Currency Calculation Examples .....	106
Data Loaded into Stage .....	106
Multi-Currency Account Groups .....	108
Transaction Matching .....	109
Settings .....	109
Global Options .....	109
User Preferences .....	110
Access Control .....	111
Match Sets .....	114
Uninstall .....	115
Load Transaction Data .....	116
Match Set Administration .....	117

## Table of Contents

---

Data Sets .....	117
Match Set Rules .....	121
Options .....	131
Access .....	134
Matches .....	135
Rule Processing .....	138
Complete or Revert Workflow .....	140
Export .....	140
Comments and Attachments .....	141
Match Actions .....	142
Unmatch Matches .....	143
Multi-Match Actions .....	144
Transactions .....	145
Transaction Status .....	145
Data Filters .....	151
Transaction Details .....	156
Export Transactions .....	157
Scorecard .....	159
Match Set Scorecard .....	160
Analysis .....	161
Data Splitting .....	162

## Table of Contents

---

Data Splitting Setup .....	162
Filters .....	164
Orphaned .....	166
Preparing External Files .....	168
Integration .....	173
Enabling Integration .....	173
Assigning Match Sets .....	174
Mapping Detail Item Information .....	175
Create Detail Items .....	176
From Transaction Matching .....	177
From Account Reconciliations .....	180
Detail Item Integration Addendum .....	186
Mapping .....	187
Selections .....	188
Scheduling Data Management Jobs .....	190
Help and Miscellaneous Information .....	194
Display Settings .....	194
Package Contents and Naming Conventions .....	194
Solution Database Migration Advice .....	195
MarketPlace Solution Modification Considerations .....	195

**Table of Contents**

---

Date Grouping Tolerances Appendix ..... 196

    No Date Tolerances ..... 196

    Post-aggregate Date Tolerances ..... 197

    Pre-aggregate Date Tolerances ..... 198

Set Up Date Tolerances ..... 199

    Post-aggregate Date Tolerances ..... 199

    Pre-aggregate Date Tolerances ..... 200

# Overview

OneStream Financial Close is a set of solutions encompassing the financial close process. Solutions included are:

- Account Reconciliations
- Transaction Matching

All solutions are installed and configured as part of OneStream Financial Close resulting in a single creation of solution tables.

The functionality in OneStream Financial Close is fully integrated, providing the ability to use Transaction Matching detail to support detail items in Account Reconciliations.

Integration between solutions is optional allowing each solution to be used independently. Solutions included in OneStream Financial Close require the same minimum Platform version.

# Setup and Installation

This section contains important details related to the planning, configuring, and installation of your solution. Before you install the solution, familiarize yourself with these details.

## Dependencies

Component	Description
OneStream 7.1.0 or later	Minimum OneStream Platform version required to install this version of OneStream Financial Close.
Account Reconciliations Transaction Matching	If you have the solutions already installed, you must be on these versions before installing OneStream Financial Close. <ul style="list-style-type: none"><li>• Account Reconciliations PV 440 SV 200 or later</li><li>• Transaction Matching PV 530 SV 201</li></ul>
Microsoft SQL Server	One of these versions of Microsoft SQL Server is required: <ul style="list-style-type: none"><li>• Standard Edition 2016 SP1 or later</li><li>• Enterprise Edition 2012 or later</li></ul>

## Select the OneStream Financial Close Location

Before beginning installation, decide whether to build the solution directly in the Production OneStream application or in a separate Development OneStream application. This section provides some key considerations for each option.

**Production OneStream Application:** The primary advantage of building the solution in a Production application is that you will not have to migrate the resulting work from a Development application. However, there are intrinsic risks when making design changes to an application used in a Production capacity and not advised.

**NOTE:** OneStream strongly recommends that you implement the solution in the Development environment with a fresh copy of the Production application before starting work.

**Development OneStream Application:** As a best practice, use the Development OneStream application to build the solution.

# Create the OneStream Development Application

1. Ensure all the OneStream artifacts relating to OneStream Financial Close such as **Workflow Profiles** and **Entities** are in the Production application.
2. Create new Scenarios as necessary for the individual solutions, to be used with OneStream Financial Close. See [Scenario](#).
3. Copy your Production OneStream application to your Development environment and rename it. This Development version will be used for your OneStream Financial Close project.

## Application Server Settings

You may need to edit the OneStream Application Server Configuration so users can create and change data in the additional database tables. If other MarketPlace solutions (such as Specialty Planning) are already in the application, these adjustments may already exist.

## Configure the OneStream Application Server

Be sure that the security group settings include the users who will be working on and setting up the solution before proceeding.

**NOTE:** Group settings are applicable to all MarketPlace solutions; it is important to keep the group names generic.


1. Start the OneStream Server Configuration Utility as an Administrator.
2. Click **Open Application Server Configuration File > Database**.

## Setup and Installation

---

### 3. Edit the following **OneStream Database Server** properties:

- **Access Group for Ancillary Tables:** Select a group that includes those who will access records.
- **Can Create Ancillary Tables:** True
- **Can Edit Ancillary Table Data:** True
- **Maintenance Group for Ancillary Tables:** Select a group who will edit and maintain tables.
- **Table Creation Group for Ancillary Tables:** Select a group who can create tables.

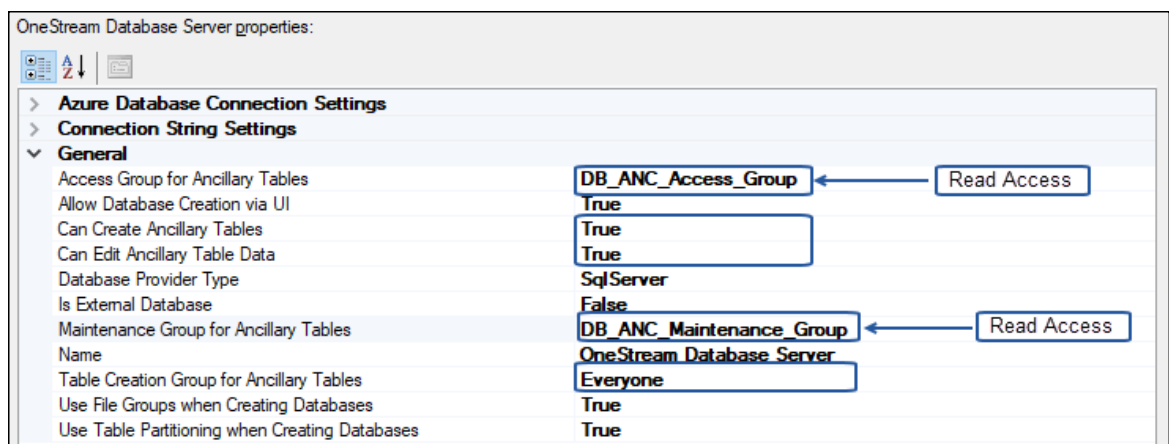

### 4. Restart Internet Information Server.

Ensure these user group settings include the people who will be working on and setting up OneStream Financial Close tables.

## Install OneStream Financial Close

1. On the OneStream MarketPlace Dashboard, click **MarketPlace > OneStream Financial Close**.
2. On the OneStream Financial Close Solution page, select the appropriate OneStream platform version from the **Minimum Platform Version** drop-down list.

## Setup and Installation


---

3. Select the most recent version from the **Solution Version** drop-down list and then click **Download**.
4. Log in to OneStream.
5. On the **Application** tab, click **Tools > Load/Extract**.
6. On the **Load** tab, click the **Select File** icon, locate the solution package, and click **Open**.
7. Click the **Load** icon.
8. Click **Close** to complete the installation.

## Set Up OneStream Financial Close

The first time you run OneStream Financial Close, you are guided through the table setup process. You can perform the setup process from any of the solutions in OneStream Financial Close.

In OneStream, click **OnePlace > Dashboards > Account Reconciliations > Account Reconciliations**.
























## Create Tables

1. Click **Step 1: Setup Tables**  
This step may be necessary when upgrading even if tables already exist. OneStream Financial Close does not drop any tables that already exist but modifies table structures and adds new ones if necessary.

**NOTE:** This step sets up tables for all solutions in OneStream Financial Close regardless of which dashboard you are in.

## Setup and Installation

---


	XFW_RCM_AccessGroupMembers
	XFW_RCM_AccessGroups
	XFW_RCM_AuditLog
	XFW_RCM_AutoRecRules
	XFW_RCM_BalanceCheckLevels
	XFW_RCM_Certifications
	XFW_RCM_ControlListAging
	XFW_RCM_ControlListCloseDates
	XFW_RCM_ControlLists
	XFW_RCM_EntityTrackingLevel
	XFW_RCM_Recon
	XFW_RCM_ReconBalance
	XFW_RCM_ReconCommentary
	XFW_RCM_ReconDefinition
	XFW_RCM_ReconItems
	XFW_RCM_ReconItemTransactions
	XFW_RCM_ReconMatchSets
	XFW_RCM_ReconStateLog
	XFW_RCM_ReconSupport
	XFW_RCM_ReconTemplates
	XFW_RCM_TrackingLevels

2. When setup is complete, click **Step 2: Launch Solution** to open the solution.

## Turning Off Dashboards

If you are not using a one of the solutions, you can turn off the dashboard for the solution.

1. Go to **Application > Dashboards**.
2. From **Dashboard Profiles**, select the dashboard that you want to turn off.
3. Change **Visibility** to **Never** and click **Save**.

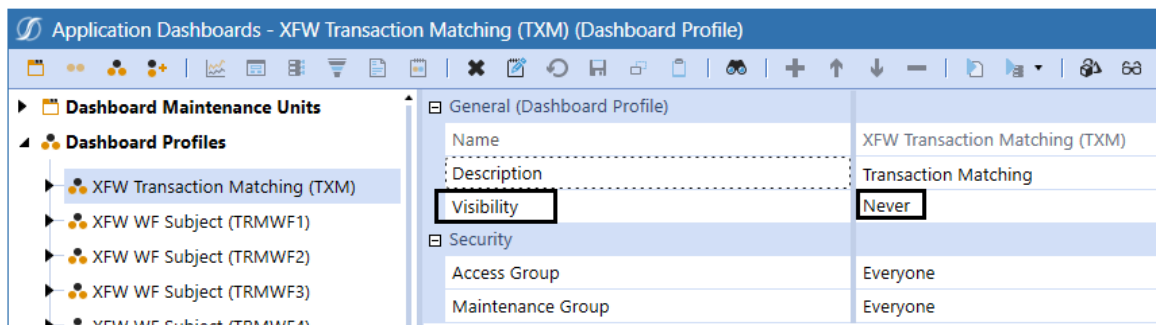

## Package Contents

### Account Reconciliations

The **Account Reconciliations Dashboard** is the user interface for settings and performing reconciliations. The following **Business Rules** are included:

- **RCM\_FormulaHelper** is a Finance Business Rule. Dynamic Member Formulas that use SQL Queries to generate reconciliation status percentages and reconciliation item type values for use in Cube View data cells.
- **RCM\_HelperQueries** is a Dashboard Data Set Business Rule. This rule can look up lists of email addresses, lists of Accounts, return reconciliation information for reporting, drill from a report to a reconciliation, and calculate statistical reconciliation data like counts, balances and statuses.
- **RCM\_ReportHelperQueries** is a Dashboard Data Set Business Rule. This rule gathers and calculates the information needed for all reports and charts displayed in Account Reconciliations.
- **RCM\_ImportExportHelper** is a Dashboard Extender Business Rule. Account Group and Access Group Import/Export Helper Functions.
- **RCM\_SetupHelper** is a Dashboard Extender Business Rule. This rule handles initial installation or upgrades from prior versions of Account Reconciliations.

## Setup and Installation

---

- **RCM\_SolutionHelper** is a Dashboard Extender Business Rule. The calculations here go hand in hand with the RCM\_DynamicCalcs UD8 Dimension. Other Business Rules help with importing templates, changing status, user notification, etc.
- **RCM\_ParamHelper** is a Dashboard XFBR String Business Rule. This rule contains dynamic logic that will change a string in a rule or on a label in the Account Reconciliations Dashboard.
- **RCM\_DataMgmtAllAuditPackages** is an Extensibility Business Rule used with a Data Management Sequence to create Audit Packages of compressed files for sharing with additional parties.
- **RCM\_DataMgmtDiscover** is an Extensibility Business Rule used with a Data Management Sequence to run the Discover process often if not on a schedule (typically during the extended close process) via the Data Management process. Review the section on *Data Management Sequences* in the *Design and Reference Guide* for running a Data Management Sequence on a schedule via Microsoft PowerShell. You can also schedule the Discover process to run. For more information see *Task Scheduler* in the *Design and Reference Guide*. Any notification related to the manually run Discover process, such as if a new Reconciliation Inventory is found, will be executed via this Data Management Sequence.
- **RCM\_DataMgmtMassActions** is an Extensibility Business Rules used with a Data Management Sequence to update the state of multiple reconciliations in one process.
- **RCM\_DataMgmtProcess** is an Extensibility Business Rule used with a Data Management Sequence to run the Process Reconciliations process when needed to ensure that Reconciliation balances are up to date and notify Account Reconciliation administrators if balances change.

**UD8 Reporting Dimension (RCM\_DynamicCalcs) and its Members** is created in the application and does not need to be added to a Cube to use its members on reports. These are all DynamicCalc members that are typically shown as columns on a report where the rows are Accounts. They are used to look up values and perform calculations to show the Reconciliation status of a particular Account/Entity/Scenario/Time Period.


- **RCM**: Reconciliation Manager Statistics – This is a member used to group the other RCM members.
- **RCM\_PctComplete\_Ent**: Entity % of Recons Completed - Gets the percent complete for all reconciliations associated with this Entity, Scenario, and Time.

## Setup and Installation

---

- **RCM\_PctComplete\_EntAcct:** Entity-Acct % of Recons Completed - Gets the percent complete for all reconciliations associated with this Entity, Scenario, Time, and Account.
- **RCM\_ISC\_EntAcct:** IS Correction (Entity Account) - Gets the IS Correction Value for all reconciliations associated with this Entity, Scenario, Time, and Account.
- **RCM\_BSC\_EntAcct:** BS Correction (Entity Account) - Gets the IS Correction Value for all reconciliations associated with this Entity, Scenario, Time, and Account.
- **RCM\_ISC\_Ent:** IS Correction (Entity) - Gets the IS Correction Value for all reconciliations associated with this Entity, Scenario, and Time.
- **RCM\_BSC\_Ent:** BS Correction (Entity) - Get the BS Correction Value for all reconciliations associated with this Entity, Scenario, and Time.

The following **Data Management Sequences and Steps** are created and can be used with their related Business Rules. Running these processes through a Data Management Sequence allows them to run in the background while the user continues their work.

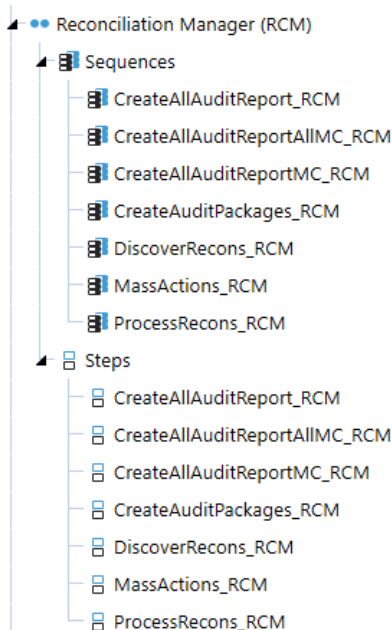

## Transaction Matching

The Dashboard Maintenance Unit provides the user interface for Transaction Matching and includes the required Dashboard Groups, Components, Data Adapters, Parameters and files.

The following Business Rules are included:

## Setup and Installation

---


- TXM\_HelperQueries
- TXM\_EventHandler
- TXM\_SolutionHelper
- TXM\_ParamHelper
- TXM\_DataMgmtProcess
- TXM\_DataMgmtCreateReconItems
- TXM\_SetupHelper

# Edit Transformation Event Handler Business Rule

The Transaction Matching solution requires changes to the Transformation Event Handler Business Rule Formula and Referenced Assemblies for the solution to work properly.

1. Add the following code to the **Formula** tab:

```
Dim txmHelper As New DashboardExtender.TXM_SolutionHelper.MainClass  
txmHelper.ProcessImportOrClear(si, globals, args)
```

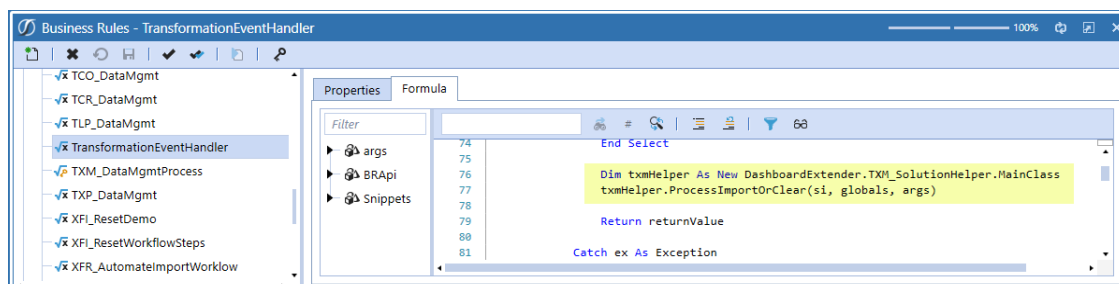

2. On the **Properties** tab, add the following code to the **Referenced Assemblies** row:

```
BR\TXM_SolutionHelper
```

## Setup and Installation

---

The screenshot shows the 'Business Rules - TransformationEventHandler' window. On the left is a tree view of business rules, with 'TransformationEventHandler' selected. On the right is the 'Properties' tab, which is divided into 'General' and 'Security' sections.

General	
Name	TransformationEventHandler
Type	Transformation Event Handler
Referenced Assemblies	BR\TXM_SolutionHelper
Is Encrypted	False

Security	
Access Group	Everyone
Maintenance Group	Everyone

# Account Reconciliations

See these topics:

- [Settings](#)
- [Reconciliation Administration](#)
- [Security](#)
- [Using Account Reconciliations](#)
- [Analysis and Reporting](#)

## Settings

To access the **Settings** page, click the toolbar button:



Use the **Settings** page to configure options for:

- [Global Setup](#)
- [Control Lists](#)
- [Templates](#)
- [Certifications](#)
- [Uninstall](#)

Only OneStream Administrators or Account Reconciliations Administrators can access this page. This security access is configured in Global Options, mentioned in this section and can see and make changes to any Global Settings page and any Reconciliation configuration. The Account Reconciliations Administrators are referenced in this document as “**Reconciliations Global Admin.**”

## Global Setup

The Global Setup page consists of settings for Global Options and Global Defaults.

## Global Options

ONESTREAM FINANCIAL CLOSE - ACCOUNT RECONCILIATIONS

SETTINGS (Clubs, ActualAR, 2022M3)

Global Options | Global Defaults

**Security Role [Manage Reconciliation Setup]:** Administrators

**Security Role [Reconciliation View Only]:** Administrators

**Security Role [Auditor]:** Nobody

**All Reconciliations Require R-Doc:**

**Allow Approver Attachments:**

**Enable Mass Actions:** Prepare  Approve

**Transaction Matching Integration:** Enabled

**Process Reconciliations On Complete Workflow:**

**Source Scenario:** Actual

**Reconciliation Scenario:** ActualAR

**Reconciliation Account Dimension:** CorpAccounts

**Reconciliation Account Member Filter:** A#[Balance Sheet].Base.Options(Cube=[GolfStream], ScenarioType=Actu

**Auto Create Reconciliation Definition:**

**Email Connection:** OneStreamEmail

**Reconciliation Definition Email Notification Types:** New OneStream Account(s)  New Reconciliation(s) Discovered  Balance Changed

**Multi-Currency Reconciliations:** Enabled

**FX Rate Type:** ClosingRate

**FX Reporting Currency:** USD

**Audit Files Use Target Name Only:**

Save

**Security Role [Manage Reconciliation Setup]:** Anyone assigned to this OneStream User Group is considered a super user who can configure any aspect of Account Reconciliations and also prepare, approve, comment, or view any reconciliation. This role is also referred to as the Reconciliations Global Admin. The default setting is the standard *Administrators* User Group.

**NOTE:** Anyone in the Administrators User Group is a OneStream System Administrator and, by default, can perform any of the same duties as a Reconciliations Global Admin.

## Account Reconciliations

---

Different from the OneStream System Administrator can be someone in the Administer Application Security Role User Group, which is configured under the *Application* tab and then in *Security Roles*. This User Group could be different from a System Administrator if the *Administrators* User Group is not assigned. If it is desired for anyone with this OneStream application's *Administer Application Security Role* to also play the role of Reconciliations Global Admin, include that same User Group as a member of the User Group assigned to *Security Role [Manage Recon Setup]*.

**Security Role [Reconciliation View Only]:** This group can see reconciliations but cannot make any changes or log any reconciliation line items. This group must also have Access Group privileges to the workflow profiles where reconciliations are managed.

**Security Role [Auditor]:** This group can see Fully Approved reconciliations only and can add comments to Fully Approved reconciliations.

**All Reconciliations Require R-Doc:** If set to *True*, each reconciliation that is not auto reconciled must have an R-Doc attached in order to click the Prepare button.

**Allow Approver Attachments:** If selected, allows approvers to add attachments to prepared reconciliations.

**Enable Mass Actions:** Default values are *False*. If set to *True*, users can set multiple reconciliations to the same status at one time. If set to *False*, the buttons for mass actions do not display on the reconciliation workspace.

- **Prepare:** Preparer can complete or recall multiple reconciliations.
- **Approve:** Approver can approve, unapprove, or reject multiple reconciliations.

**Transaction Matching Integration:** Select to enable integration with the Transaction Matching solution.

**IMPORTANT:** After you enable integration with Transaction Matching and save the settings, you cannot disable the integration.

**Process Reconciliations on Complete Workflow:** Setting this to *True* initiates *Process Reconciliations* before marking the workflow as completed. If balances have changed, then the workflow cannot be completed.

**NOTE:** The *Process Reconciliations* action performed as part of the Complete workflow step is an in-line action. Running *Process* at the Base Input or Review level are Data Management jobs.

## Account Reconciliations

---

**Source Scenario:** Typically the "Actual" scenario. When *Discover* is performed during reconciliation, this is the scenario queried for balances.

**Reconciliation Scenario:** Set this up as a scenario separate from Actual. In this document, we are using an example of a scenario called *ActualAR*. This is a mirror of Actual but assigned a different scenario type, so a different workflow profile can be used with it, therefore it can have separate workflow locking from the Actual scenario type scenarios.

**Reconciliation Account Dimension:** Select the Account dimension containing the accounts to be reconciled.

**Reconciliation Account Member Filter:** Enter an account-based member filter used to query a list of accounts to reconcile. For example:

*A#[Balance Sheet].Base, A#1000, A#2000.Base*

If Extensible Dimensionality is being used on the Accounts dimension in this application, this member filter must be adjusted to query accounts differently across each cube. This is because an account could be a base member in one Account dimension and a parent in another. Here is an example of this syntax:

*A#[Balance Sheet].Base.Options(Cube=[GolfStream], ScenarioType=Actual),A#[Balance Sheet].Base.Options(Cube=[Houston], ScenarioType=Actual)*

**Auto Create Reconciliation Definition:** If set to the default of *True*, when a user clicks Discover on the Reconciliation's Definition, a *Reconciliation Definition* is added for any account in the *Account List* that does not yet have one.

**Email Connection:** The named email connection used for notifications. The name of the connections in this drop list derives from the initial server configuration.

**Reconciliation Definition Email Notification Types:** Default values are *False*. If set to *True*, an email is sent to those in the main Security Group (*Manage Recon Setup*) under Global Options when these events happen.

- **New OneStream Accounts:** New account is included in the *Account List* after running *Discover*.
- **New Recons Discovered:** New *Reconciliation Inventory* items are found after running *Discover*.
- **Balance Changed:** A reconciled balance was changed either after it was marked *Complete* or set to *In Process* and is different from the original value.

**Multi-Currency Reconciliations:** Enables the multi-currency features in the solution.

## Account Reconciliations

---

**NOTE:** After you click this button and save the settings, multi-currency cannot be disabled. It is strongly recommended that this feature be tested in a development application because you cannot revert to single currency reconciliations.

The impact of multi-currency is discussed throughout the document. Enabling multi-currency allows you to have a currency type set at the *Source Account* level (GL Account). The account currency type for each reconciliation item is maintained within the *Reconciliation Inventory*. This differs from the local currency (maintained on the Entity dimension) and reporting currency (maintained at the cube level). Therefore, each reconciliation item may have a different Account currency.

Reconciliations with a common *Target Entity* will have the same local currency, and all reconciliations within an application will have a single reporting currency. In addition, for reconciliations where multi-currency is enabled, account, local, and reporting currencies all display in the Account Reconciliations user interface.

Detail items may also be created using any currency type maintained in OneStream and are automatically translated to account, local, and reporting currencies upon *Save*. Also, Account Groups may be created for accounts or entities that have different currency types, allowing child reconciliations to be translated and aggregated to a single reconciling currency type, for each currency level, at the Account Group level.

### FX Rate Type

*Single Currency Solutions:* The FX Rate Type that is being used to calculate the reconciliation balances on specific reports. Examples include *ClosingRate* or *AverageRate*. If this is not populated, no translated values are available in reports. This must be set even if multi-currency is enabled because some reconciliations within the *Reconciliation Inventory* may remain Single Currency.

*Multi-currency Solutions:* The FX Rate Type that is being used to translate reconciliation balances from local currency to account currency and from local currency to reporting currency. Translation from one currency level to another only occurs if the account and/or reporting balances are not loaded into Stage. Local currency is the base-level currency and is the level that is reconciled for single currency applications. Therefore, local balances are required for multi-currency reconciliations. This is also the rate type that is used to translate detail items from the detail currency type to the account, local, and reporting currency types. If this is not populated, translations do not occur.

### FX Reporting Currency

*Single Currency Solutions:* The currency type used as the target currency for reports that translate values. If this is not populated, no translated values will be available on these reports.

## Account Reconciliations

Note on translation in certain reports: Account Reconciliations provides a translated value in certain reports for the convenience and analysis of the administrator or end user. This translated value is not stored but is calculated based on settings in Global Setup as the report is being processed. This is a simple translation being run that assumes a calculation similar to the “Direct” translation method of multiplying what is expected to be a Year to Date value by the *FX Rate Type* specified in Global Setup, however these are not the same translation algorithms being processed and no custom translation methods (i.e. Business Rules) are supported. These reports note that they are translated by listing this *FX Reporting Currency* in the right side of the report’s header section.

Reconciliation		Reconciliation Scenario: ActualAR	
		Time: 2018M3	
		Currency Level: Translated	
		Currency Type: USD	
<b>10000 - Petty Cash</b>			
GL Account	OneStream Entity	GL Entity	Tracking Detail
10030	Augusta	54	
<b>Risk Level:</b> Low	<b>Proper Sign:</b> (Unassigned)	<b>Due Date:</b> 6/11/2020	<b>Days Until Due:</b> 0 <b>Days Past Due:</b> 41
<b>Balance:</b> 1,001,256.31	<b>Status:</b> Inprocess	<b>Approval:</b> Unapproved	
<b>Explained:</b> 0.00	<b>Status By:</b> Admin	<b>Approval Level:</b> 0 of 1	
<b>Unexplained:</b> 1,001,256.31	<b>Status Date:</b>	<b>Approval By:</b>	
<b>Activity:</b> 20,025.13		<b>Approval Date:</b>	

**NOTE:** To see the reports within the Reports and Analysis in different currency types, enable multi-currency.

**Audit Files Use Target Name Only:** Controls the naming convention for Audit Package files. When set to *True*, audit files that are created will only use the Target Account and Entity in the file name. When set to *False*, the audit files are created with the Source and Target Account and Entity in the file name. The default is set to not selected, (*False*).

**NOTE:** The check box should be selected if there is the possibility of the file name length exceeding the Windows limit of 260-character file names. If the file name exceeds 260-characters, the Audit Package file will not be generated. Windows 10 does enable users to change the 260-character limit by changing the Windows Group Policy.

## Global Defaults

Global Options		Global Defaults				
<b>Default Reconciliation Definition</b>						
Reconciled	Tracking Level	Default Template (XLSX)				
<input checked="" type="checkbox"/>	Entity IC 2	BasicTemplate.xlsx				
1 Rows Page 1 of 1						
<b>Default Reconciliation Attributes</b>						
Preparer	Approver 1	Approver 2	Approver 3	Approver 4	Access Group	Notification Method
AugustaPreparer	AugustaApprover1	(Unassigned)	(Unassigned)	(Unassigned)	(Unassigned)	(Unassigned)
1 Rows Page 1 of 1						
<b>Default Reconciliation Time-based Attributes</b>						
Required	Account Currency	MC Enabled	Reconciling Currency Level	Approvals	Risk Level	Proper Sign
<input checked="" type="checkbox"/>	USD	<input type="checkbox"/>	Local	1	Low	(Unassigned)
1 Rows Page 1 of 1						

### Default Reconciliation Definition

Default attributes for all new *Reconciliation Definitions* created during the *Discover* process. See [Reconciliation Definition](#) for details on configuration. This only occurs if the *Auto Create Reconciliation Definition* property of Global Options is selected.

### Default Reconciliation Attributes

Default attributes for Security Roles (Preparer, Approver 1-4, and Access Group) and Notification Method. Note that the same user cannot be assigned to more than one security role.

These settings apply to all new Reconciliation Inventory items created during the Discover process. See [Reconciliation Inventory](#) for details on configuration.

### Default Reconciliation Time-based Attributes

Default attributes for time-based attributes. These settings apply to all new Reconciliation Inventory items created during the Discover process.

## Control Lists

You can set up control lists for:

## Account Reconciliations

---

- [Item Types](#)
- [Reason Codes](#)
- [Close Dates](#)
- [Aging Periods](#)

### Item Types

When a Preparer creates Reconciliation Detail Items, these are the types of items that can be created. You can add new Item Types.

**NOTE:** An Item Type cannot be deleted.

Item Types    Reason Codes    Close Dates    Aging Periods

Item Types			
Stored Value	Display Value	Description	Active
Balance Check	Balance Check	Explained	<input checked="" type="checkbox"/>
Calculation	Calculation	Explained	<input checked="" type="checkbox"/>
Correction (BS)	Correction (BS)	Correction (BS)	<input checked="" type="checkbox"/>
Correction (IS)	Correction (IS)	Correction (IS)	<input checked="" type="checkbox"/>
Explained Item	Explained Item	Explained	<input checked="" type="checkbox"/>
Intransit Item	Intransit Item	Explained	<input checked="" type="checkbox"/>
Investigating	Investigating	Explained	<input checked="" type="checkbox"/>
Matching_DS1	Matching_DS1	Explained	<input checked="" type="checkbox"/>
Matching_DS2	Matching_DS2	Explained	<input checked="" type="checkbox"/>
Matching_DS3	Matching_DS3	Explained	<input checked="" type="checkbox"/>
Reversing Item	Reversing Item	Explained	<input checked="" type="checkbox"/>
Stmt Balance	Stmt Balance	Statement	<input checked="" type="checkbox"/>
Sub-System Balance	Sub-System Balance	Statement	<input checked="" type="checkbox"/>
Timing Items	Timing Items	Explained	<input checked="" type="checkbox"/>

**Stored Value:** Text written to the *Account Reconciliations* tables when an item is added. The user does not see this.

**Display Value:** *Item Type* text that displays to the user when reconciling.

**Description:** Type of item added to a reconciliation.

## Account Reconciliations

---

- **Correction (BS) or Correction (IS):** These items indicate an issue with the current balance in the GL and requiring a correction.
- **Explained:** A manually entered item.
- **Statement:** An item supported with an attached statement such as a cash account statement.

**Active:** By default, this is set to *True*. If *False*, these Item Types do not display when creating items.

## Reason Codes

When you click **Reject** or **Unapprove**, you are prompted to provide a Reason Code for the change. You can edit the reason codes or add new ones.

Reason Codes		
Stored Value	Display Value	Active
Invalid Documentation	Invalid Documentation	<input type="checkbox"/>
Missing Documentation	Missing Documentation	<input type="checkbox"/>
More Detail Required	More Detail Required	<input type="checkbox"/>
Must Clear Old Item(s)	Must Clear Old Item(s)	<input type="checkbox"/>
Other	Other	<input type="checkbox"/>

**Stored Value:** Text written to the Account Reconciliations tables when a reason is added. The user does not see this.

**Display Value:** *Reason Code* text that displays to the user when entering a reason.

**Active:** By default, this is set to *True*. If *False*, these *Reason Codes* do not display when rejecting or unapproving.

## Close Dates

*Close Dates* associate a Workflow Time Period with a specific day and time. The purpose of this is to pivot from this date and time to determine if someone is late with their assignments, regardless of their location.

## Account Reconciliations

---

Close Dates			
WF Time ▼	Close Date Local (Day 0) ▼	Close Hour (0 Hour) ▼	Close Date UTC (Day 0, Hour 0) ▼
2022M3	03-24-2021	12	03-24-2021 16:00:00

**NOTE:** If the Close Dates are not set up for a given period, then the date is 1900/01/01 on the Reconciliations page.

**WF Time:** Workflow Time Period. Click the + button to add one record for each Workflow Time Period related to the *Source Scenario*.

**NOTE:** The list of Workflow Time periods is for the currently selected Workflow Year plus the following year. This includes all frequencies of time (half years, quarters, months, weeks if applicable) for this application. Choose a time-period relevant to the Input Frequency of both the Source Scenario and Recon Scenario involved in Account Reconciliations. The Input Frequency properties of each scenario (for example, Monthly) must match.

**Close Date Local (Day 0):** Set to the date when the financial close starts for this Workflow Time Period.

**Close Hour (0 Hour):** Set to the hour of day for what local time the close starts. For instance, if this is 5:00 PM, set this as 17. Local time is determined by the time zone where your OneStream server is located.

**Close Date UTC (Day 0, Hour 0):** No entry is required because saving the record calculates the value. The *Close Date Local (Day 0)* and *Close Hour (0 Hour)* are converted to the UTC (Coordinated Universal Time, aka GMT/Greenwich Mean Time) equivalent for the purposes of comparing the current local time for when a Reconciliation Inventory item is due.

## Aging Periods

Aging periods are used to review your detail item aging, in total, so you can determine which balances need to be written off. The aging period is automatically assigned to an item upon Save based on the calculated aging and the periods created. Aging periods are used in the Aging Pivot analysis report. Each start date must be unique.

## Account Reconciliations

---

Aging Periods	
Period Start	▼
	0
	31
	61
	91

**Period Start Date** : Click the + button to add aging periods. For example, if you enter 16 for a new period start date, the first period is 0-15 days and the next period is 16-30 days.


The default period start dates are:

- 0: 0 to 30 days
- 31: 31 to 60 days
- 61: 61 to 90 days
- 91: 91+ days

## Templates

The location where standard Excel templates are stored for assignment to *Global Defaults* and *Reconciliation Definitions*.

## Account Reconciliations

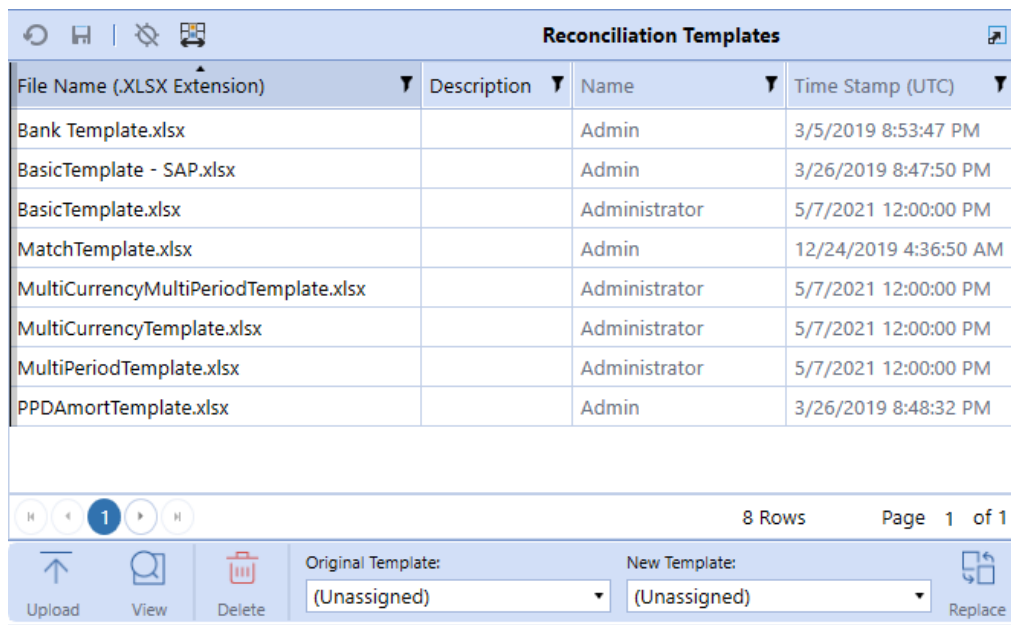

File Name (.XLSX Extension)	Description	Name	Time Stamp (UTC)
Bank Template.xlsx		Admin	3/5/2019 8:53:47 PM
BasicTemplate - SAP.xlsx		Admin	3/26/2019 8:47:50 PM
BasicTemplate.xlsx		Administrator	5/7/2021 12:00:00 PM
MatchTemplate.xlsx		Admin	12/24/2019 4:36:50 AM
MultiCurrencyMultiPeriodTemplate.xlsx		Administrator	5/7/2021 12:00:00 PM
MultiCurrencyTemplate.xlsx		Administrator	5/7/2021 12:00:00 PM
MultiPeriodTemplate.xlsx		Administrator	5/7/2021 12:00:00 PM
PPDAmortTemplate.xlsx		Admin	3/26/2019 8:48:32 PM

8 Rows Page 1 of 1

Upload View Delete Original Template: (Unassigned) New Template: (Unassigned) Replace

Account Reconciliations comes with a few example templates. You can create custom templates and upload them here.

**Upload:** Add a new Excel template to this solution.

**View:** Opens a read-only copy of the selected template.

**Delete:** Deletes a template if it is not assigned to any reconciliations.

**Replace:** To change the template assigned to any existing *Reconciliation Definition*, select the *Original Template*, the *New Template*, and then click **Replace**. This change occurs in all *Reconciliation Definitions*. When viewing the Basic Template that comes with Account Reconciliations, there are Substitution Variables replaced with values from the reconciliation being processed. This is the design view below.

**NOTE:** In this template, the rows normally hidden are shown along with the Excel Named Range being imported.

## Account Reconciliations

Account Reconciliations							
Basic Template							
!!NameAndDescription!							!!AccountType!
Consolidation Account:		!!AcT!	Entity				
GL Account:		!!Ac!	!!Et!				
GL Balance:							!!Balance!
Reconciliation Detail:							
Item Type	Item Name	Note	Transaction Date	Reference 1	Reference 2	Amount	
Application							
XFW_RCM_ReconItems							
Merge							
xfText#[!ItemType]	xfText#[!ItemName]	xfText#[!ItemNote]	xfDateTime#[!TransactionDate]::EndOfPeriod	xfText#[!Reference1]	xfText#[!Reference2]	xfDec#[!ItemAmount]	
Explained Item	Monthly Amortization					5,000.00	
Explained Balance:							5,000.00
Unexplained Difference:							#VALUE!

The references to Substitution Variables in the top part of the Excel Template relate to Substitution Variables available in Account Reconciliations. These settings are replaced when the user downloads the template at runtime to substitute with values from Account Reconciliations. Other Substitution Variables can be used here, making templates flexible.

Basic Template							
!!NameAndDescription!							!!AccountType!
Consolidation Account:		!!AcT!	Entity				
GL Account:		!!Ac!	!!Et!				
GL Balance:							!!Balance!
Basic Template							
10000 - Petty Cash							Asset
Consolidation Account:		10000	Houston Heights				
GL Account:		11080	Heights				
GL Balance:							2,003,260.00

For details on designing this type of Excel template to load into OneStream , see *Data Collections* in the *Design and Reference Guide*.

## Account Reconciliations

Here is how this appears as a multi-currency S-Doc Template, with the MultiPeriodTemplate.xlsx being the example template provided. Note that the Named Range of *xfiRecon* is selected and rows 16-20 are unhidden, but are normally hidden. This Named Range would need to be extended if additional rows are needed for import. The top left cell of such a Named Range must be the cell with the word *Application* in it and the bottom right cell of the range should be the last column of the last row to be imported. It is acceptable to include additional empty rows in this range. OneStream can read in multiple 'xft' Named Ranges on one or more sheets of the same Excel workbook. Save this file in Excel xlsx format.

Account Reconciliations		FX Rate Type: ( FX_RateType_RCMC )									
Multi-Currency Amortization Schedule		7/22/2020 12:57									
NameAndDescription		AccountType									
Consolidation Account:		Account		Entity							
GL Account:		Act		Ent							
GL Balance:		Account ( CurrencyTypeAccount_RC   CurrencyTypeLocal_RCMg    CurrencyTypeReporting_RC  CurrencyTypeAccount_RCMC CurrencyTypeLocal_RCMC CurrencyTypeReporting_RCMC    BalanceAccount     Balance     BalanceReporting )									
Amortization Detail:		***Only Type if Manual Override Required***									
Item Type	Item	Explanation	Amortization Period	Detail Amount	Currency Type	( CurrencyTypeAccount    CurrencyTypeLocal    CurrencyTypeReporting_RCMC )	( CurrencyTypeAccount    CurrencyTypeLocal    CurrencyTypeReporting_RCMC )	( CurrencyTypeAccount    CurrencyTypeLocal    CurrencyTypeReporting_RCMC )	( CurrencyTypeAccount    CurrencyTypeLocal    CurrencyTypeReporting_RCMC )	( CurrencyTypeAccount    CurrencyTypeLocal    CurrencyTypeReporting_RCMC )	( CurrencyTypeAccount    CurrencyTypeLocal    CurrencyTypeReporting_RCMC )
Application	FWW_RCM_ReconItems	Merge									
xftText#	{ItemName}	xftText#	{ItemNote}	xftDec#	{ItemAmountAmountMultiC}	xftDec#	{ItemAmountAccou	xftDec#	{ItemAmount: 0	xftDec#	{ItemAmountReportin
Explained Item	Amortization		!2018M1	5,000.00	EUR						
Explained Item	Amortization		!2018M2	5,000.00	EUR						
Explained Item	Amortization		!2018M3	5,000.00	EUR						
Explained Item	Amortization		!2018M4	5,000.00	EUR						
Explained Item	Amortization		!2018M5	5,000.00	EUR						
Explained Item	Amortization		!2018M6	5,000.00	EUR						
Explained Item	Amortization		!2018M7	5,000.00	EUR						
Total Amortization											
Unamortized Balance		#VALUE!									

A few column tokens of note:

**Wtk:** Workflow Time Key – These OneStream time periods contain an exclamation point as the first character (for example, !2018M1). This helps OneStream look up the time key for this period and store that value in the database upon import. Include as many rows as periods of data are necessary, even if spanning years.

**Item Amounts (Multi-currency Solutions):** These columns are automatically translated within the template. The template is pulling FX rates for the period in order to translate the Detail Amount balances. The translated amounts are for display purposes only, because translation of the Detail Amounts takes place upon import into OneStream. Further, only current period balances will be translated on the template.

**BookedPeriod:** The |WFTime| Substitution Variable is used, which means that every row imported lists the period it was booked as the same period that was processed at the time.

**TimeStamp:** The date and time this template was imported, which will be the same for each time period.

## Account Reconciliations

---

**NOTE:** If a template is used to create a supporting Detail Item, that support type, either T-Doc or S-Doc, must be attached to the reconciliation or the reconciliations may not be completed.

**Multi-currency Solutions:** Templates that support multiple currencies are included for solutions that have multi-currency enabled. In the Multi-currency Basic Template and Multi-currency Multi Period Template, columns are included to allow for Detail Amount, Detail Currency Type, Account Balance, and Reporting Balance.

For Single Currency reconciliations, only Local balances are loaded and as such, if a reconciliation is set to Single Currency, the templates that do not include Multi-Currency functionality must be used. The currency type for each currency level appears within the template and FX rates are automatically pulled in order to show the conversion that will occur on import. Note that OneStream still utilizes the translation functionality within the system to translate Detail Amounts.

The translated balances of Account, Local, and Reporting for the Detail Items are for informational purposes only. However, if an override is necessary for any of the levels, OneStream accepts the overridden amount upon upload of the template if overrides are permitted on the reconciliation. To identify balances that were overridden within the template, amounts overridden display bold and the override alert appears on the face of the reconciliation.

For Multi-Period templates, informational translated balances only display for the current month because future rates are not available at the time of template creation.

## Access Control

Access Groups can be created under *Access Control* by OneStream Administrators or Reconciliation Global Admins. Access Groups are used only by the Account Reconciliations solution and are different than User Groups used in other parts of OneStream.

Access Groups can be initially set up to support the concept of backup people in the case of vacation or other reasons where the person assigned to a primary role cannot perform their duties in a given month. It can contain many users of each role. For example, an Access Groups may contain more than one user for the *Preparers* role. By adding more than one user per role in this way, the main person's backup is already granted access.

Another way that backups are built in is where a person in a superior role can act in place of a person in a lesser role for a given month. For example, if a user in a *Preparers* role is on vacation, a person in the *Approvers 1* role can act as a Preparer that month, but cannot approve the reconciliation because of enforced Segregation of Duties requirements. Someone else must approve for this particular month.

## Account Reconciliations

See [Security](#) for more information including the concepts of Local Admin and [Segregation of Duties](#).

To manage access groups:

- Click **+** to add a row.
- Select the boxes next to one or more items in the list and click **-** to delete. As a best practice, export your access groups before making a mass update. See [Access Groups \(Mass Updates\)](#).
- Click **Save** to save changes.
- Click **Cancel All Changes Since Last Save** to cancel unsaved changes.

## Access Groups (Editor)

The screenshot displays the 'Access Groups (Editor)' interface. It features two main data tables side-by-side. The left table, titled 'Access Groups', has columns for 'Name' and 'Description'. The right table, titled 'Security User Members', has columns for 'Security User', 'Role', 'Notify', and 'Local Admin'. Below the right table is another section titled 'Security Group Members' with columns for 'Security Group', 'Role', 'Notify', and 'Local Admin'. The interface includes standard table controls like '+', '-', refresh, and 'Defer Refresh' buttons, as well as pagination information at the bottom of each table.

Access Groups	
Name	Description
<input type="checkbox"/> All_APTrade	AP Trade for all entities
<input type="checkbox"/> APTradeUpdated	APTradeUpdated
<input type="checkbox"/> Eagle	Eagle
<input type="checkbox"/> Frankfurt	Frankfurt
<input type="checkbox"/> Frankfurt_GA	Frankfurt_GA
<input checked="" type="checkbox"/> Houston	Houston
<input type="checkbox"/> Houston_GA	Houston_GA
<input type="checkbox"/> Houston_Rec	Houston Receivables
<input type="checkbox"/> HoustonAPTrade	HoustonAPTrade
<input type="checkbox"/> NewEagle	NewEagle
<input type="checkbox"/> Quebec	Quebec
<input type="checkbox"/> SharedServices	Shared Services
<input type="checkbox"/> SouthHouston	SouthHouston

Security User Members			
Security User	Role	Notify	Local Admin
<input type="checkbox"/> RCM_Approver1	Approvers 1	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> RCM_Approver2	Approvers 2	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> Houston_LocalAdmin	Viewers	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Security Group Members			
Security Group	Role	Notify	Local Admin
<input type="checkbox"/> RCM_Commenters	Commenters	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> RCM_Viewers	Viewers	<input type="checkbox"/>	<input type="checkbox"/>

**Name:** Name of the Access Group. It is recommended to use a common naming configuration since there could be many of these. For instance, starting the Name with R\_ is a good way to signify that this Access Group is meant to be assigned to an individual Reconciliation Inventory item. Starting with G\_ would mean that this Access Group is meant to be assigned to an Account Group. Whatever standard is set by your project team, it is recommended that this is documented and followed by all Account Reconciliation Admins.

**Description:** A more detailed description of this Access Group.

### Security User Members

**Security User:** Select a user from a list of all users within the OneStream Framework. A user can only be added to an Access Group once.

**Role:** Select a role for this user:

- **Preparers** – Can see assigned reconciliations and perform preparation duties through clicking the Prepare button.
- **Approvers 1 through Approvers 4** – Choose up to four levels of approvers. You should assign at least as many Approvers as there are approval levels on the reconciliation that this Access Group is assigned to. For example, if the reconciliation has Approvals set at 3, there must be at least a user assigned to the related Access Group at Preparer, Approval 1, Approval 2, and Approval 3 to be able to prepare, and approve the reconciliation.
- **Commenters** – Optional. This user can see the data and activity but can only make comments related to this reconciliation.
- **Viewers** – Optional. This user can see the data and activity but cannot make comments related to this reconciliation.

**Notify:** Select this box to send email notifications to this user (as configured under the Notifications tab on the Administration page).

**Local Admin:** Select this box if this person acts as the Local Admin for this Access Group. See [Local Admin Permissions](#) for more information.

### Security Group Members

**Security Group:** Select a group from Platform Security Groups. A group can only be added to an Access Group once.

**Role:** Select a role for this group:

- **Preparers**– Can see assigned reconciliations and perform preparation duties by clicking the Prepare button.

## Account Reconciliations

- **Approvers 1 through Approver 4** – Choose up to four levels of approvers. You should have an Approver for each approval level on the reconciliation that this Access Group is assigned to. For example, if the reconciliation has Approvals set at 3, there must be at least a group assigned to the related Access Group at Preparer, Approval 1, Approval 2, and Approval 3 to be able to prepare, complete, and approve the reconciliation.
- **Commenters**– Optional. This group can see the data and activity but can only make comments related to this reconciliation.
- **Viewers**– Optional. This group can see the data and activity but cannot make comments related to this reconciliation.

**Notify:** Select this box to send email notifications to this group (as configured under the Notifications tab on the Administration page).

**Local Admin:** Select this box if this group acts as the Local Admin for this Access Group. See [Local Admin Permissions](#) for more information.

## Access Groups (Mass Updates)

### Import / Export of Access Groups

Allows you to use Excel to edit Access Groups.

The screenshot displays the 'Access Groups (Mass Updates)' interface. It features two data tables and a control panel at the bottom.

**Security User Members Table:**

Group Name	Security User	Role	Notify	Local Admin
APTradeUpdated	RCM_Preparer	Preparers	<input type="checkbox"/>	<input type="checkbox"/>
APTradeUpdated	RCM_Approver1	Approvers 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Houston	RCM_Approver1	Approvers 1	<input type="checkbox"/>	<input type="checkbox"/>
Houston	RCM_Approver2	Approvers 2	<input type="checkbox"/>	<input type="checkbox"/>
Houston	Houston_LocalAdmin	Viewers	<input type="checkbox"/>	<input checked="" type="checkbox"/>

5 Rows Page 1 of 1

**Security Group Members Table:**

Group Name	Security Group	Role	Notify	Local Admin
Houston	RCM_Commenters	Commenters	<input type="checkbox"/>	<input type="checkbox"/>
Houston	RCM_Viewers	Viewers	<input type="checkbox"/>	<input type="checkbox"/>

2 Rows Page 1 of 1

**Control Panel:**

- Buttons: Import / Export, Copy Access Group, Clone Access, Replace Access, Remove Access
- Table Type: Access Groups
- Actions: Import, Export, Template

## Account Reconciliations


---

**Table Type:** Select whether to export data or a template for *Access Groups* or *Members of Access Groups*.

**Export:** Exports either Access Groups or Access Group Members to a CSV file that opens in Excel for editing. You must add a Named Range starting with the letters 'xft' covering appropriate columns and rows, with the cell with the word *Application* in it being the top left cell of the range. Save this file in Excel xlsx format. See [Templates](#) for more information.

	A	B
1	Access Groups	
2		
3	Group Name [String]	Group Description [String]
4		
5	Application	
6	XFW_RCM_AccessGroups	
7	Merge	
8	xftText#[GroupName]	xftText#[GroupDesc]
9	AP_Other	AP Other Group
10	Fixed_Assets	Fixed Assets Group
11	Payroll	Accrued Payroll
12	W_Houston	Houston Workflow Reconciliations


**Template:** Opens a pre-fixed Excel template for loading *Access Groups* or *Access Group Members* depending on the *Table Type* selection.

	A	B
1		
2		
3		
4	<b>Access Groups</b>	
5		
6	Group Name [String] (Required)	Group Description [String]
12	YourGroup	YourDescription
13		
14		
15		
16		
18	(Insert new rows between the blue bars)	

**Import:** Opens a dialog to select an Excel or CSV file that contains *Access Groups* or *Access Group Members* to merge changes or add new records.



**CAUTION:** When you import, make sure that the source file is not open on your computer otherwise an error occurs.

### Copy Access Group

Import / Export	Copy Access Group	Clone Access	Replace Access	Remove Access
Source Access Group	Target Access Group			
Frankfurt	Frankfurt_2025	Copy		

Select a *Source Access Group* as the model group, enter a name for the *Target Access Group*, and then click **Copy**. The Users and User Settings in the *Source Access Group* are added to the newly created *Target Access Group*.



### Clone Access

Import / Export	Copy Access Group	Clone Access	Replace Access	Remove Access
Source Security User	Target Security User			
ACM_Requestor	ACM_Approver	Source Security Group	Target Security Group	Clone
		(Unassigned)	(Unassigned)	

Select a *Source Security User* as the model user and a *Target Security User*, and then click **Clone**. The *Target Security User* is added into every Access Group that the *Source Security User* is in. If the *Target Security User* was previously in an Access Group that the *Source Security User* is not in, the *Target Security User* is removed from that group. The *Target Security User* and *Source Security User* will have the same access.

You can use the same procedure to clone security group access.

### Replace Access

Import / Export	Copy Access Group	Clone Access	Replace Access	Remove Access
Source Security User	Target Security User			
ACM_Requestor	ACM_Approver	Source Security Group	Target Security Group	Replace
		(Unassigned)	(Unassigned)	

Select a *Source Security User* who will be replaced in every *Access Group* with the *Target Security User* and then click **Replace**.

You can use the same procedure to replace security groups.

### Remove Access

Removes the selected security user or group from every Access Group.

### Certifications

Certifications are customizable text that are presented to users with the Preparer or Approver roles when a reconciliation is completed and approved.

Role	Message	Active	Comment Required	Time Stamp	User
Preparer	I have prepared the account reconciliation and attest to the following: 1) The reconciliation has been completed in accordance with the company policy 2) All support has been properly attached 3) All items have been accurately identified and classified	<input checked="" type="checkbox"/>	<input type="checkbox"/>	5/22/2020 3:35:15 PM	Admin
Approver	I reviewed the reconciliation and attest to the following: 1) The reconciliation was completed in accordance with the company policy 2) All support was properly attached 3) All items have been accurately identified and classified	<input checked="" type="checkbox"/>	<input type="checkbox"/>	5/22/2020 3:35:15 PM	Admin

**Role:** The role of Preparer or Approver for the certification.

**NOTE:** The Approver Certification is presented for all approval levels.

**Message:** The certification message presented to the Preparer or Approver when completing or approving reconciliations.

**Active:** By default, this is set to *True*. If *False*, the certification is not displayed when completing or approving reconciliations.

**Comment Required:** By default, this is set to *True*. If *False*, comments are not required, but can optionally be added when completing or approving reconciliations. Comments are displayed in the *Status and Approval History – Detail* section.

**Time Stamp:** The date and time the certification settings were created or modified.

**User:** The ID of the user who created or modified the certification settings.

# Uninstall

The Uninstall feature allows you to uninstall the user interface or all solutions within OneStream Financial Close. If performed as part of an upgrade, any modifications that were made to standard solution objects are removed.

**IMPORTANT:** The Uninstall option uninstalls all solutions integrated in the OneStream Financial Close.

The uninstall options are:


1. **Uninstall UI - OneStream Financial Close** removes all solutions integrated into the OneStream Financial Close, including related dashboards and business rules but leaves the databases and related tables.

**IMPORTANT:** This procedure resets the Workspace Dashboard Name to (Unassigned). An Administrator must manually reassign the Workspace Dashboard Name after performing an Uninstall UI.

2. **Uninstall Full - OneStream Financial Close** removes all the related data tables, data, dashboards, and business rules from all solutions integrated into OneStream Financial Close. Select this option to completely remove the solutions or to perform an upgrade that is so significant in its changes to the data tables that this method is required.

**CAUTION:** Uninstall procedures are irreversible.

# Reconciliation Administration

Click  to open the Administration page. This page is accessible by OneStream Admins, Reconciliations Global Admins and Local Admins (in limited scope).

The Administration page is where you configure:

- [Definition](#)
- [Inventory](#)
- [Groups](#)
- [Tracking](#)

## Account Reconciliations

- [BalCheck](#)
- [AutoRec](#)
- [Notifications](#)

## Reconciliation Definition

**IMPORTANT:** If you have reconciliations that have a frequency other than monthly, upon migration to OneStream Financial Close version PV660 SV100 or later, you must run Discover for all periods where reconciliations exist to ensure that all reconciliations are captured. For example, if you have reconciliations with a quarterly and monthly frequency, run Discover for a quarterly period to ensure that the complete population of inventory is discovered.

The **Reconciliation Definition** page is where high-level properties are set for all Reconciliation Inventory items that are found through the **Discover** process. Reconciliation Definitions tell OneStream that these Account dimension members need to be reconciled. Reconciliation Inventory items are detailed Account data rows and Account Groups found in the OneStream Stage that were imported from the General Ledger. This page is not accessible by Local Administrators.

ONESTREAM FINANCIAL CLOSE - ACCOUNT RECONCILIATIONS

ADMINISTRATION - Definition (Clubs, ActualAR, 2022M1)

Definition Inventory Groups Tracking BalCheck AutoRec Notifications

### Account List

Drag a column header and drop it here to group by that column

Account	Description	Reconciled	Type
10000	Petty Cash	True	Asset
10100	Cash Deposits	True	Asset
10200	Other Cash Equivalents	True	Asset
10300	Marketable Securities	True	Asset
10400	Restricted Cash	True	Asset
10500	Cash in transit	False	Asset
11000	Trade Receivables	True	Asset
11100	Other Receivables	True	Asset
11200	IC Receivables	True	Asset
11300	Allowance for Doubtful Accounts	True	Liability
11400	Dividend receivables	True	Asset
11500	IC Delta Receivables	False	Asset
12000	Raw Materials Inventory	True	Asset
12100	Work in Progress Inventory	True	Asset

### Reconciliation Definition

Reconciled	Tracking Level	Default Template (XLSX)	Reference Document
<input checked="" type="checkbox"/>	(Entity)	BasicTemplate.xlsx	Work Instructions.doc

1 Rows Page 1 of 1

Upload View Delete

### Entity Tracking Level Override

Entity	Tracking Level
--------	----------------

Discover Page 1 of 1

### Account List

The initial Account List is generated based on the solution's *Recon Account Dimension* and *Recon Account Member Filter* settings in Global Options. These accounts are from the OneStream Cube, not from the General Ledger. This lists each of these accounts along with their account type. If an account has a related *Reconciliation Definition*, then it displays a value of *Reconciled = True*.

### Reconciliation Definition

Click **Discover** to add a Reconciliation Definition to each account. Only one Reconciliation Definition can be added per account in the Account List. You can also click the + button to add a Reconciliation Definition to an account.

**Reconciled:** Determines whether an account is reconciled. If selected, this is set to *True* in the Account List on the left and the account is reconciled. If cleared, this is set to *False* in the Account List on the left and it and any of its related detailed imported Stage rows are not reconciled.

**Tracking Level:** Derived from the **Tracking Levels** settings page and determines the granularity of the reconciliation. It is used during the **Discover** process.

**Default Template (XLSX):** Derived from the Templates page and determines the template used by the preparer. This can be overridden at the Reconciliation Inventory level.

**Reference Document:** The document to display to the user at run time for this account. See [Reference Document Options](#).

### Entity Tracking Level Override

There are times when an account needs to be tracked in the Reconciliation Inventory at a level that is an exception for certain entities beyond the setting for that account in general as set in the Reconciliation Definition. In these cases, click + to add an exception per entity that requires one for this Reconciliation Definition. For instance, account 10000 has a Tracking Level of (Entity), which means by Entity and Account. But for that same account and an entity called ABC, they may need to track this account by Entity, Account and Flow.

### Discover

Click **Discover** to process the Reconciliation Definitions and create the Reconciliation Inventory as a background process. Discover runs for the current and future workflow periods. Prior periods are not affected by the discovery process.


## Account Reconciliations


In Global Options, if the *Auto Create Recon Definition* property is set to *Yes*, it adds a Reconciliation Definition for each row in the Account List that does not already have one.


This process also builds out the Reconciliation Inventory entries by searching the current and future time periods for the *Source Scenario* in the Stage for any instance of a row of source data that was mapped to an account that has an active Reconciliation Definition.

**IMPORTANT:** Clicking **Discover** searches for every entity associated with the currently selected Workflow Profile, so running Discover at a higher level in the Workflow Profile structure at a Review level Workflow Profile will generate considerably more Reconciliation Definitions.

You can run Discover on multiple workflows simultaneously as long as the workflows do not have a parent/child relationship. For example, you can run Discover on the Frankfurt and Houston workflows at the same time. But you cannot run Discover on Frankfurt and Clubs at the same time because Clubs is a parent of Frankfurt.

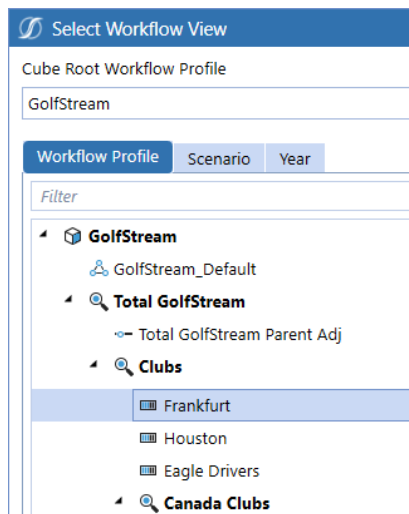

Click the Task Activity icon  to show the results of the Discover process and how many new Reconciliation Inventory Items were discovered.

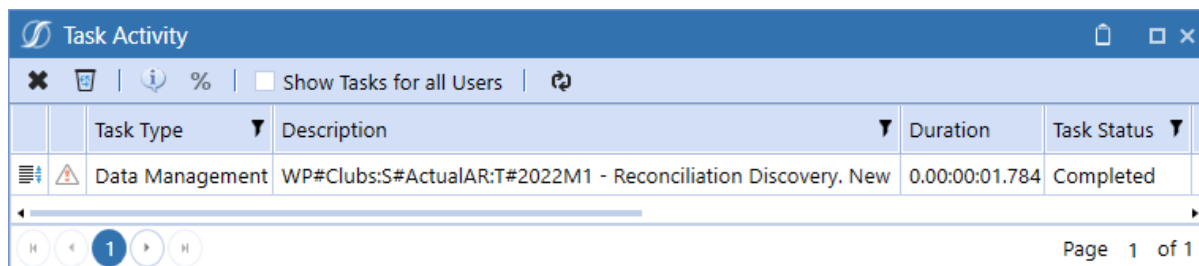

Task Type	Description	Duration	Task Status
Data Management	WP#Clubs:S#ActualAR:T#2022M1 - Reconciliation Discovery. New	0.00:00:01.784	Completed

Page 1 of 1

**NOTE:** You can manually run the Discover process from the Data Management Sequence called *DiscoverRecons\_RCM*. For scheduled Discover jobs, you must pass in these parameters: ProfileKey, SourceScenarioId, ReconScenarioId, TimeKey.

## Reference Document Options

A Reference Document is a set of instructions used to explain how to perform a reconciliation. This can be presented to the user as they prepare the reconciliation.

### Upload

Load a document to the *Reconciliation Definition*.

### View

Download a copy of the document from the *Reconciliation Definition*.

### Delete

Delete the document from the *Reconciliation Definition*.

## Reconciliation Inventory

This is where you configure reconciliations. The Reconciliation Definition is based on the target accounts being reconciled. After you click **Discover**, the Reconciliation Inventory is generated. The Reconciliation Inventory is based on the Source Accounts (from the GL) related to the Target Accounts (accounts in the OneStream Cube) that have active Reconciliation Definitions for a specific Workflow Profile.

**TIP:** The state of each reconciliation inventory item is visible. This helps you to understand which items are already prepared when selecting reconciliations to make edits to.

## Account Reconciliations

ADMINISTRATION - Inventory (Clubs, ActualAR, 2022M3)

Definition Inventory Groups Tracking BalCheck AutoRec Notifications Assigned Match Sets: (Full Inventory)

Drag a column header and drop it here to group by that column

<input type="checkbox"/>	State	State Text	WF Profile	Recon Scenario	S.Account	T.Account	S.Entity	T.Entity
<input type="checkbox"/>	<span style="color: blue;">●</span>	In Process	Houston.Import	ActualAR	11080	10000 - Petty Cash	Heights	Houston Heights
<input checked="" type="checkbox"/>	<span style="color: blue;">●</span>	In Process	Houston.Import	ActualAR	11080	10000 - Petty Cash	Heights	Houston Heights
<input type="checkbox"/>	<span style="color: red;">●</span>	Rejected	Houston.Import	ActualAR	11080	10000 - Petty Cash	Heights	Houston Heights
<input type="checkbox"/>	<span style="color: orange;">●</span>	Balance Changed	Houston.Import	ActualAR	10001	10100 - Cash Deposits	Heights	Houston Heights
<input type="checkbox"/>	<span style="color: green;">●</span>	Prepared	Houston.Import	ActualAR	10001	10100 - Cash Deposits	Heights	Houston Heights
<input type="checkbox"/>	<span style="color: green;">●</span>	Prepared	Houston.Import	ActualAR	10002	10100 - Cash Deposits	Heights	Houston Heights
<input type="checkbox"/>	<span style="color: blue;">●</span>	In Process	Houston.Import	ActualAR	10002	10100 - Cash Deposits	Heights	Houston Heights
<input type="checkbox"/>	<span style="color: orange;">●</span>	Balance Changed	Houston.Import	ActualAR	10003	10100 - Cash Deposits	Heights	Houston Heights

Edit Delete Access Match Set Import Export

**Assigned Match Sets:** Select an option to filter the inventory to view where Match Sets are assigned. Select one or more match sets or select one of these options:

- **(Full Inventory):** All reconciliations.
- **(All):** Reconciliations that have a match set assigned.
- **(None):** Reconciliations that do not have a match set assigned.

**Edit:** Edit the attributes for the selected reconciliation. You can select multiple reconciliations and make changes that apply to all. For example, you can select multiple reconciliations and change the Risk Level from Medium to High.

**Delete:** Deletes the selected Reconciliation Inventory item.

**NOTE:** If the Discover process results in more Reconciliation Inventory items than desired, delete those that are not intended for future processing.

**Access:** Edit the access group for the selected reconciliation.

**Match Set:** Manage the assigned match set for the selected reconciliation.

**Import:** Opens a dialog to select an Excel xlsx formatted file to import that contains Reconciliation Inventory Items to merge changes. The import will not create new Reconciliation Inventory Items nor allow the *[NewGuid]* argument. You must close this file before importing it. This button is not accessible by Local Admins.

## Account Reconciliations

**Export:** Exports all reconciliations in the Reconciliation Inventory, except for Account Group type items, as a CSV file that can be opened in Excel. You must add a Named Range starting with the letters 'xft' covering appropriate rows starting with the cell with the word *Application* in the top left cell. This file should then be saved in Excel xlsx format. You must close this file before importing. Instructions are included in the exported file. This button is not accessible by Local Admins.

**NOTE:** The headers at the top indicate the global default value that will be used.

ReconciliationID (ReconID) (GUID)	Wfk (WfProfileKey) (GUID)	Wsk (ScenarioID) (int32)	Ac (S.Account) (String)	ACT (T.Account) (String)	VwT (View) (String)	OgT (Origin) (String)	Et (S.Entity) (String)	ETT (T.Entity) (String)	Fw (S.Flow) (String)	FwT (T.Flow) (String)
General instructions: Save CSV file As an Excel XLSX file. Select the ranges of cells starting with 'Application' to the last row in the last column of data. Create a Named Range that starts with the letters 'xft'. Importing will handle the merging of changes to existing Reconciliation Inventory items and will not create new items.										
Reconciliation Inventory										
Application										
Wfk_Recon										
Merge										
xftGUID(ReconID)::NewGUID	xftGUID(Wfk)	xftInt(Wsk)	xftText(AC)	xftText(Act)	xftText(VwT)(YTD)	xftText(OgT)(Import)	xftText(Et)	xftText(ETT)	xftText(Fw)	xftText(FwT)
Rf24c13-394a-4f6a-824b-b67b4ee349f9	Eagle Drivers.Import	ActualAR	30000	10000 YTD	Import		34 Augusta			
Rc380b12-0806-4187-b11c-d943f5e0564c	Eagle Drivers.Import	ActualAR	30000	10000 YTD	Import		42 Carlsbad			
8f518b8-3d88-4872-9164-b966b0e8fafe	Frankfurt.Import	ActualAR	11080	10000 YTD	Import		FRANKFU	Frankfurt		
8ed5dc7-ef38-4cab-9c3d-fa7926d78139	Houston.Import	ActualAR	11080	10000 YTD	Import		Heights	Houston Heights		
113946b-3d15-4767-a358-16e8019f564c	Houston.Import	Actual	11080	10000 YTD	Import		Heights	Houston Heights		
R09921b-9c08-4096-af06-3222576099e4	Quebec.Import	ActualAR	11080	10000 YTD	Import		68 Montreal			
16efae08-4118-4f68-d0ae-229646b055de	Quebec.Import	ActualAR	11080	10000 YTD	Import		70 Quebec City			
279d971-8866-41c8-8e09-3f79a1a94276	Houston.Import	ActualAR	11080	10000 YTD	Import		South	South Houston		

## Reconciliation Inventory Item Attributes

Attributes must be configured for every Reconciliation Inventory Item not assigned to an Account Group. For items assigned to an Account Group, these attributes are configured at the Account Group level.

Reconciliation attributes are pulled forward from month to month using Discover. Changes made to reconciliation attributes are reflected in all subsequent periods and do not apply to prior periods.

## Editing Reconciliation Attributes

To edit reconciliation attributes:

## Account Reconciliations

1. Select a reconciliation from the inventory list and then click **Edit**. If multiple reconciliations are selected at once, the attributes of the first reconciliation selected (from the Inventory page, not the validation grid below) will appear in the dialog.

E Edit Reconciliation Attributes

**Info**

Required: Yes  
 MC Enabled: No  
 Account Currency: USD  
 Reconciling Currency Level: Local  
 Account Group: (No Group)

**Role**

\*Preparer: (Unassigned)  
 \*Approver 1: (Unassigned)  
 \*Approver 2: (Unassigned)  
 \*Approver 3: (Unassigned)  
 \*Approver 4: (Unassigned)

\*Access Group: Houston  
 Approvals: 1  
 \*Notification Method: (Unassigned)

**Action**

Risk Level: Low  
 Proper Sign: Positive  
 Unexplained Limit: 0.000000000  
 Can Override Detail: No  
 Require Override Support: No

AutoRec Rule: (Unassigned)  
 Activity Limit: 0.000000000  
 BalCheck Level: (Unassigned)  
 BalCheck WF: (Unassigned)

Prepare Rule: [ ]  
 Substitution Variable Selector: [Balance]  
 Ctrl-C To Copy: [Balance]

**Other**

Preparer Workday Due: 1  
 Approver Workday Due: 1  
 Frequency: 1-12  
 Template: (Unassigned)

Status	Message	WF Profile	Recon Scenario	S.Account	T.Account	S.Entity	T.Entity	S.Flow	T.Flow
●		Houston.Import	ActualAR	11085	10300 - Marketable Securities	Heights	Houston Heights		

\* Non Time-based Attribute (Applies to all Workflow Periods)

Save
Cancel

2. Make changes to attributes.

**IMPORTANT:** When you edit reconciliation attributes, you must select the checkbox above the attribute for the change to be applied when you click **Save**. The Save button displays after a checkbox is selected.

Can Override Detail: Yes  
 Require Override Support: No

3. Click **Save**.

When editing reconciliation inventory attributes, Security Roles and Notification Methods can be edited at any time. Other attributes can be edited only if the reconciliation has not been prepared.

**Required:** If not checked, this will not be required to be reconciled.

## Account Reconciliations

---

**WF Profile:** This is the Workflow Profile that was discovered for this Source Account and is a Base Input Child Import Workflow Profile.

**MC Enabled(*Multi-currency Solutions*):** Indicates if Multi-currency is enabled for the reconciliation.

Within the Reconciliations page, Account and Reporting currency types will appear as a dash and balances will be zero for a reconciliation until the established *MC Enabled* period.

While Account currency may not be used/required, being able to see Reporting within the Reconciliations page may be helpful. In this instance, where only two currency levels exist (e.g. Local and Reporting), it is recommended that Multi-currency be enabled, the Account currency default set to Local, and the *MC Enabled* setting enabled for each reconciliation.

Performance considerations must also be considered when using Multi-currency for the entire Reconciliation Inventory. Specifically, if the entire inventory enables Multi-currency, forcing a translation on Reconciliation Balances and Detail Items may cause processing times to increase. As such, it is recommended only reconciliations where Multi-currency is necessary be enabled or a translation on demand is run during non-critical business hours. See [FX Translation Warning](#) for more information.

**Account Currency (*Multi-currency Solutions*):** Currency type for the Account level balance. This will be a drop-down of all currency types within the Currency Filter in the *Application Properties*. The default currency type will be set to Local and will therefore be the T. Entity's currency type. This may be changed by selecting a different currency from the drop-down.

**Reconciling Currency Level (*Multi-currency Solutions*):** Determines the currency level, either Account, Local or Reporting, to be used for the reconciliation. The default is Local, as this is the level that was previously reconciled prior to multi-currency was enabled. This reconciling level applies to the *Unexplained Limit*, *Prepare Rules*, *AutoRec*, *Balance Change*, and *Balance Checks*. For example, if the *Unexplained Limit* for a reconciliation is set to 0, the *Reconciling Currency Level* is set to Account, and the *Unexplained Limit* is 0 for the Account level but 100 for the Local, the reconciliation could be prepared. However, if the Reconciling Currency is set to Local in the example above, the reconciliation could not be prepared.

The Reconciling Currency Level is easily identified as it is the level in larger, bold font.

	Balance:	Explained:	Unexplained:	Activity:
<b>Account (GBP)</b>	<b>260,526.54</b>	<b>199,191.89</b>	<b>61,334.65</b>	<b>5,601.11</b>
Local (EUR)	308,543.64	235,904.53	72,639.11	6,170.87
Reporting (USD)	416,842.46	318,707.02	98,135.43	46,435.81

## Account Reconciliations

---

**Account Group:** Shows whether this Reconciliation Inventory Item is related to an Account Group or (*No Group*) if it is reconciled individually. If the user is a Local Admin, the list of Account Groups is limited to only those they manage. The Local Admin can change the assignment of a Reconciliation Inventory Item to a different Account Group, but once assigned they are unable to set as (*No Group*).

**Preparer :** Assign the user or group. The same user or group cannot be added to multiple roles. You can update security roles at any time.

**Approver 1-4:** Assign the user or group. The same user or group cannot be added to multiple roles. You can update security roles at any time.

**Access Group:** Assign an Access Group to each Reconciliation Inventory Item that is not assigned to an Account Group or set to (*Unassigned*). If user is a Local Admin, list of Access Groups is limited to only those they manage.

**Approval Levels:** Choose levels of approval required for each Reconciliation Inventory Item from 1 through 4. Ensure that the Access Group assigned has people configured at the appropriate levels of approval. See [Access Control](#).

**Notification Method:** Select a method for notification created on the Notifications page or set to (*Unassigned*).

**Risk Level:** Options are *Low*, *Medium* or *High Risk* for this *Reconciliation Definition*. This is for reporting and other filtering.

**Proper Sign:** Options are Positive and Negative. Assign a value for the proper signage expected on a reconciled number that is to be imported into the Stage.

**Unexplained Limit:** This will determine whether a Reconciliation can be prepared if the explained value is within a certain absolute value threshold. By default, a reconciliation is not considered prepared unless the balance is explained to the penny. If the *Unexplained Limit* is set to 1000 and the currency is USD, then the reconciliation can be prepared if the difference is explained within \$1000 USD.

**Require Override Support:** When set to *True*, supporting documentation, either an I-Doc or R-Doc, is required for all detail items with translated amounts that were manually overridden. Note that an S-Doc will also satisfy this requirement.

**AutoRec Rule:** This is a drop-down list populated from the list of rules created in the AutoRec page. The default is set to (*Unassigned*), meaning the reconciliation does not have an AutoRec Rule applied.

A second item, (*Legacy*), will exist in all solutions which first checks the Balance to see if it is zero and if so, will automatically reconcile that reconciliation. Otherwise, it checks the activity in this reconciliation since the last period and compares to the absolute value of the *Activity Limit*.

## Account Reconciliations

---

**Activity Limit:** If an AutoRec rule is created that has *Activity* selected, the rule will check the activity (differences in Balance) in this reconciliation since the last period and compares to the absolute value of this number. For instance, if the balance was explained last month at \$1000, the new balance is \$100, and the *Activity Limit* is \$500. This reconciliation would not automatically reconcile.

**BalCheck Level:** Detailed calculation and testing of details from the GL. This is typically used to ensure the value in total matches a summary value as expected. This type of Reconciliation is pointed to a Workflow Profile to retrieve data from the Stage as a point of reference for a given Reconciliation. The Workflow Profile assigned to check this Balance can be set up in an *Account Group* or in a single Reconciliation Inventory Item. The default is set to (*Unassigned*), which means the reconciliation is a Standard reconciliation that does not use Balance Check.

**Recon Scenario:** This will default to the Recon Scenario set in *Global Options*.

**T.Account:** Target Account in the Cube and this comes from the *Reconciliation Definition*.

**S.Account:** Source Account. This comes from the related Stage area from the *Source Scenario*. The Source Accounts are derived from that Workflow Profile's Transformation Rules and are based on the Target Account in the *Reconciliation Definition*.

**T.Entity:** Target Entity in the Cube. There will be an entry here for each Entity that has relevant data in the Stage in any time period in the application from the *Source Scenario*.

**S.Entity:** Source Entity from the Stage.

**Currency (*Single Currency Solutions*):** Currency is the Target Entity currency per the Entity dimension.

**Local Currency (*Multi-currency Solutions*):** Currency type for the Local level balance. This is the same as the Currency column in Single Currency Solutions. It is not editable within Account Reconciliations as it is maintained within the Entity dimension.

**Reporting Currency (*Multi-currency Solutions*):** Currency type for the Reporting level balance. This is not editable as it is derived from the Cube currency. Only a single Reporting currency is allowed per Cube.

**Substitution Variable Selector:** A list of Substitution Variables used in *Prepare Rule* as an input to an expression. Select one of these Substitution Variables and click the blue field next to it. Type *Ctrl-C* and it will copy that text to the Windows clipboard for convenient pasting later. The options are either variables from Account Reconciliations or fields in the Stage tables. For example, |Ac| is the Account field from Stage while |AcT| is the post translated Account from that same table.

**Prepare Rule:** Overrides the *Unexplained Limit*. Rule logic can include any item from the *Substitution Variable Selector*. See "Expression Rule Syntax" on page 47 for details.

## Account Reconciliations

---

Example 1:

$|Balance| < 1000$

Example 2:

$|BalanceAccount| < 1000$

Example 3:

This logic will set a global unexplained limit based on currency by retrieving the closing FX rate for the individual reconciliation's currency relative to USD.

$|UnexplainedBalance| < XFBR$   
(*MyCustomBusinessRule, UnexplainedLimitHelper, Currency=|Currency|, Time=|Wtk|*)

**BalCheck WF Profile:** This is required if using a Reconciliation Type of *Bal-Check*. Details from the GL are loaded to Stage in a separate Workflow Profile and tested by some form of Transformation Rule such as mapping many detail lines to one summarized value or even using complex Transformation Event Handler logic to calculate a check figure. For example, the Transformation Rule might add all of the detailed transactions that make up a Trade Receivables Account and compare it to the amount imported from the Trial Balance. If that matches when the number is brought into the Reconciliation as an explained amount, it may reconcile or not based on the amount. This field is where the Workflow Profile containing that detailed data load is specified. After a Workflow Profile is assigned here for a *Balance Check*-type reconciliation, Account Reconciliations checks to see if that Transformation Rule passed or failed to determine whether this reconciliation is complete.

### *Multi-currency Solutions*

Loading in Detail Amounts, Detail Currency Types, Account level and Reporting level balances requires identifying the columns related to these items within the Data Source. Note that Detail Amount represents the transaction amount, which could be in a currency type that is different than any reconciliation currency level and is different than what is loaded for Single Currency solutions since they just load Local currency balances. Detail Amounts, Account Amounts, and Reporting Amounts need to be set to the Data Type of "Attribute Value" and Detail Currency needs to be set to the Data Type of "Attribute". Local amounts must exist for BalCheck to properly translate and calculate. If null, values will not translate. As such, ensure null values are replaced with zero.

## Account Reconciliations

Entities	Account	Detail Amount	Detail Currency	Account Amount	Local Amount	Reporting Amount
1 Heights	20000	101	EUR	100	200	300
2 Heights	20000	102				
3 Heights	20000	103	USD			
4 Heights	20000	104	CAD			
5 Heights	20000	201	EUR	100	200	300
6 Heights	20000	202	GBP			
7 Heights	20000	203	USD			
8 Heights	20000	204	CAD			
9 Heights	20000					

### Allow Override (Multi-currency Solutions)

When set to *True*, the ability exists to override translated Account, Local, and Reporting amounts for Detail Items. If FX Rates exist for the current period, upon *Save* (creation) of a Detail Item, OneStream will automatically translate the Account, Local, and Reporting amounts. If Allow Override is enabled, the ability exists to manually input amounts for any of the currency levels. If only one level is overridden, the other translated balances will remain. Similarly, if FX Rates have not been entered for the current period and a level is overridden, the override balance will appear and the amounts to be translated will appear as zero. Amounts that are overridden will hold period over period if a Detail Item is pulled forward.

**NOTE:** When an amount is overridden using zero, OneStream automatically retranslates the amount using the rates in FX Rates table. If showing a zero balance for a currency level is required, a new Detail Item must be created with a detail amount of zero and enter the opposite balance for the currency level that needs to be set to zero (i.e. offset balance).

**Frequency:** Determines how often the completion of this *Reconciliation Definition* is required. The default is 1-12 which indicates months 1-12. This can 3,6,9,12 if required quarterly or enter another type of frequency expression.

## Account Reconciliations

---

**NOTE:** If the *Frequency* is changed on the *Reconciliation Definition*, some reconciliations may be *Prepared* or still *In Process*. This would normally stop the user from preparing them due to this new *Frequency*. In these cases, the reconciliations will be marked with a Status of *Frequency Changed* which will not prevent the preparer from preparing. This status is ignored in all status counts except for the *Scorecard Preparation Status* chart.

**Preparer Workday Due :** Enter + or - and a 1-2 digit number for the days. For example, if you enter -10 and the close date is 1/31/22, then the preparer due is 1/21/22.

**Approver Workday Due:** Indicates the due date for the final approver. Enter + or - and a 1-2 digit number for the days. For example, if you enter +2 and the close date is 1/31/22, then the approver due date is 2/2/22.

**IMPORTANT:** The Approver date cannot be before Preparer date.

**Template (XLSX):** The *Reconciliation Definition* sets the default Excel Reconciliation Template for any related Reconciliation Inventory Items, but a single Reconciliation Inventory Item can override this Template assignment with this field.

**Discovery Date:** The date and time when an Account Group was created or when a Reconciliation Inventory Item was first discovered.

**NOTE:** The filter on this column can be used to find newly discovered Reconciliation Inventory Items by, for instance, setting the filter properties to be *Is Greater Than* and a date that is before Discovery is done for a given month, such as the first day.

Discovery Date ▼

Show rows with value that ✕

Is greater than ▼

4/1/2018 📅

And ▼

Is equal to ▼

Enter date 📅

Filter Clear Filter

### Expression Rule Syntax

The fields for *Prepare Rule* and *AutoRec Rule* use the same expression syntax. OneStream uses an ADO.NET data table calculated column to interpret expressions, so there is no OneStream parser logic involved. Choices from the Substitution Variable Selectors can be used to make these more dynamic. The expression evaluator supports the following operators and more:

- And, Not, In, Between, Like, Null, Or, Trim
- Open bracket '(' and close bracket ')'
- <, >, <=, >=, <>, =
- + (addition)
- - (subtraction)
- \* (multiplication)
- / (division)
- % (modulus)
- Conditional 'if'
- Substring

Example:

`|BalanceChange| > 1000 And |BalanceLocal| = 0`

*XFBR String* Business Rules can also be used to determine the expression to be placed here at run time. For *XFBR String* rule syntax, refer to the *Dashboard XFBRString* section of the *Design and Reference Guide*.

### Account Groups

Groups of Source Accounts can be reconciled collectively instead of individually. Each Account Group becomes a single reconciliation for the aggregate of the Source Accounts. Local Admins can only save new Account Groups if they assign an Access Group that they manage.

## Account Reconciliations

State	State Text	WF Profile	Recon Scenario	Group Name	Child Count	S.Account
Balance Changed		Houston.Import	ActualAR	GRPAPTrade	5	GRP - AP Trade
In Process		Houston.Import	ActualAR	GRPAPTrade	5	GRP - AP Trade
In Process		Houston.Import	ActualAR	Test	1	Machinery & Equipment
Balance Changed		Houston.Sales Detail	ActualAR	GRPMachineryEquipment	5	Prepaid
In Process		Houston.Sales Detail	ActualAR	GRPMachineryEquipment	5	Prepaid
Balance Changed		Clubs	ActualAR	GRPICHousCarls	2	GRP - IC Houston_Carlsbad

### Single Currency Solutions

Account Groups should be created in a single currency because, by an Account Group's nature, the untranslated source data will be aggregated together for analysis. For example, if someone reconciles all the Fixed Asset accounts for USD, create an Account Group for each local currency to be reconciled and then add accounts to each of these from the Reconciliation Inventory.

### Multi-currency Solutions

Account Groups may be created using any currencies included in the *Application Properties* and maintained in the FX Rates grid. The Account Group will be a single reconciliation for the translated aggregate of the Source Account, Local, and Reporting currencies. For example, if a company reconciles all intercompany accounts at a consolidated level and the Local currencies are different, a Multi-currency Account Group may be created to reconcile the related accounts in a single, consolidated currency.

First, each currency level is translated to the Account Group currency and then aggregated. When creating a new Multi-currency Account Group, both Account and Local currency must be selected for the group, as well as the MC Enabled option. After the Account and Local currencies are selected, Multi-currency Account Groups are reconciled the same as Single Currency, in that detail items are used to support the aggregate balance of all child reconciliations.

See [Multi-currency Account Groups](#).

When a reconciliation is added to an Account Group, it can no longer be prepared individually and can only be prepared at the group level. Therefore, the Prepare button is not visible for reconciliations that are part of an Account Group.

## Child Reconciliations

Select one or more Account Groups to view the reconciliation items assigned to the groups.

## Account Reconciliations

Drag a column header and drop it here to group by that column							
<input type="checkbox"/>	State	State Text	WF Profile	Recon Scenario	Group Name	Child Count	S.Account
<input type="checkbox"/>	Balance Changed		Houston.Import	ActualAR	GRPAPTrade	5	GRP - AP Trade
<input type="checkbox"/>	In Process		Houston.Import	ActualAR	GRPAPTrade	5	GRP - AP Trade
<input type="checkbox"/>	In Process		Houston.Import	ActualAR	Test	1	Machinery & Equipment
<input checked="" type="checkbox"/>	Balance Changed		Houston.Sales Detail	ActualAR	GRPMachineryEquipment	5	Prepaid
<input type="checkbox"/>	In Process		Houston.Sales Detail	ActualAR	GRPMachineryEquipment	5	Prepaid
<input type="checkbox"/>	Balance Changed		Clubs	ActualAR	GRPICHousCarls	2	GRP - IC Houston_Carlsbad

Child Reconciliations							
Drag a column header and drop it here to group by that column							
WF Profile	Recon Scenario	Group Name	S.Account	T.Account	S.Entity	T.Entity	
Houston.Import	ActualAR	GRPMachineryEquipment	12340	16000 - Machinery & Equipment at cost	Heights	Houston Heights	
Houston.Import	ActualAR	GRPMachineryEquipment	12340	16000 - Machinery & Equipment at cost	Heights	Houston Heights	
Houston.Import	ActualAR	GRPMachineryEquipment	12360	16000 - Machinery & Equipment at cost	Heights	Houston Heights	
Houston.Import	ActualAR	GRPMachinervEQUIOMENT	12360	16000 - Machinerv & EQUIOMENT at cost	Heights	Houston Heights	

After a Reconciliation Inventory item is assigned to an Account Group, it becomes a child reconciliation of the group. After adding the child to an Account Group, most of the child's attributes take on the values assigned for the Account Group. Additionally, if attributes are changed for an Account Group, the child reconciliations' attributes within the group will be updated to be in line with the Account Group attributes upon Save. This is helpful because detailed configuration of individual items is not necessary.

For example, if you change the Risk Level for an Account Group from Low to High, the risk level of the child reconciliations changes from Low to High.

Only these attributes are changed at the child reconciliation level:

- Account Currency
- BalCheck WF Profile

**NOTE:** The Administrator can change the account group from Multi-currency to single currency only if the child reconciliations of the group all use the same local currency.

These attributes, set at the group level, do not flow through to the child reconciliations:

## Account Reconciliations

- T Account
- S Account
- T Entity
- S Entity
- WF Profile
- Local Currency
- Account Currency
- BalCheck WF

ADMINISTRATION - Groups (Clubs, ActualAR, 2022M3)

Definition Inventory Groups Tracking BalCheck AutoRec Notifications

Drag a column header and drop it here to group by that column

<input type="checkbox"/>	State	State Text	WF Profile	Recon Scenario	Group Name	Child Count	S.Account
<input type="checkbox"/>	Balance Changed		Houston.Import	ActualAR	GRPAPTrade	5	GRP - AP Trade
<input type="checkbox"/>	In Process		Houston.Import	ActualAR	GRPAPTrade	5	GRP - AP Trade
<input type="checkbox"/>	In Process		Houston.Import	ActualAR	Test	1	Machinery & Equipment
<input type="checkbox"/>	Balance Changed		Houston.Sales Detail	ActualAR	GRPMachineryEquipment	5	Prepaid
<input type="checkbox"/>	In Process		Houston.Sales Detail	ActualAR	GRPMachineryEquipment	5	Prepaid
<input type="checkbox"/>	Balance Changed		Clubs	ActualAR	GRPICHousCarls	2	GRP - IC Houston_Carlsbad

Create Import Export Template

**State and State Text:** Indicates state of Account Group.

**WF Profile:** Workflow Profile where this Account Group will be shown for reconciling. This can be either a Review level or Base Input Import-level Workflow Profile.

**Recon Scenario:** Defaults to the Recon Scenario set in Global Options.

**Group Name:** Account Group name set up by the Reconciliations Global Admin.

**Child Count:** Number of reconciliations assigned to the group.

**T.Account:** Target Account in the Cube. Choose this from the list. This will help filter results and guide the drill down process.

## Account Reconciliations

---

**S.Account** : Source Account. Indicate something that will notify the user as to what type of Account Group this will be.

**T.Entity**: Target Entity in the Cube. Specify an Entity, however the Entities to which this Account Group are applied are more related to the Source Accounts from the Reconciliation Inventory. Depending on the Reconciliation Inventory items added to this Account Group, there could be many target entities. This will help filter results and guide the drill down process

**S.Entity** : Source Entity. Indicate something that will notify the user as to what type of entity this will be. The entities seen when preparing reconciliations are those related to the Workflow Profile.

**Currency (Single Currency Solutions)**: Untranslated source Local currency data is aggregated in the Account Group, requiring it to be one currency. If needed, create a similar Account Group for each currency to be reconciled.

**Account Currency (Multi-currency Solutions)**: Currency type for the Account level balance. Account balances for each Source Account within an Account Group will be translated to the Group's Account currency and then aggregated to the total Reconciliation Balance.

**Local Currency (Multi-currency Solutions)**: Currency type for the Local level balance. Local balances for each Source Account within an Account Group will be translated to the Group's Local currency and then aggregated to the total Reconciliation Balance.

**Reporting Currency (Multi-currency Solutions)**: Currency type for the Reporting level balance. This is not editable as it is derived from the Cube currency. Only a single Reporting currency is allowed per Cube.

**Other attributes** : See [Reconciliation Inventory Item Attributes](#). The attributes set at the Account Group level override what is set for the included Source Accounts. These attributes set at the group level do not flow through to the child reconciliations:

- T Account
- S Account
- T Entity
- S Entity
- WF Profile
- Local Currency

## Account Reconciliations

---

- Account Currency
- BalCheck WF

**NOTE:** Changing an Account Group composition will change its status. If an Account is moved out of an Account Group, the Account Group's status is copied to the individual reconciliation.

Assign Account Groups to a Review-level Workflow Profile when a group of Accounts is being reconciled across many entities by several people. That Review Workflow Profile should be high enough in the Workflow Profile structure to encompass the required entities. The entities are included in Base Input Workflow Profiles and are dependents of this Review-level Workflow Profile.

## Account Group Actions

For descriptions of the fields in the create, edit, and clone dialog boxes described below, see "Reconciliation Inventory Item Attributes" on page 39.

You can perform the following actions on Account Groups:

**Create:** Create a new Account Group. Keep in mind:

- Group Name must be unique and cannot include special characters (including spaces).
- Local Admins can only see the Access Groups that they are members of.

## Account Reconciliations

### Create Account Group

Info

Group Name

Required: Yes  
MC Enabled: No  
Local Currency: USD  
Account Currency: USD  
Reconciling Currency Level: Local

\*Workflow Profile:   
\*T. Account:   
\*S. Account (Display Name):   
\*T. Entity: None  
\*S. Entity (Display Name):

Role

Preparer: (Unassigned)  
\*Approver 1: (Unassigned)  
\*Approver 2: (Unassigned)  
\*Approver 3: (Unassigned)  
\*Approver 4: (Unassigned)

\*Access Group: (Unassigned)  
Approval Levels: 1  
\*Notification Method: (Unassigned)

Action

Risk Level: Low  
Proper Sign: (Unassigned)  
Unexplained Limit: 0.000000000  
Can Override Detail: No  
Require Override Support: No

AutoRec Rule: (Unassigned)  
Activity Limit: 0.000000000  
BalCheck Level: (Unassigned)  
BalCheck WF: (Unassigned)

Prepare Rule:   
Substitution Variable Selector: [Balance]  
Ctrl-C To Copy: [Balance]

Other

Preparer Workday Due: 0  
Approver Workday Due: 0  
Frequency: 1-12  
Template: (Unassigned)

[Create](#) [Cancel](#)

**Clone:** Clone the attributes of the selected Account Group to create a new group. Keep in mind:

- Group Name must be unique and cannot include special characters (including spaces).
- To assign an Access Group to an Account Group, you must be Local Admin of the selected Access Group.

**Edit:** Edit the attributes of the selected Account Group. Keep in mind:


- The Local Currency of a single currency Account Group must match the currency of the child reconciliations.
- The Local Admin can only edit account groups if they are within part of the Access Group assigned to the Account Group.
- To assign an Access Group to an Account Group, you must be a Local Admin, RCM Admin, or a OneStream Admin. Local Admins can only assign the access groups that they are a part of.

## Account Reconciliations

---

- T. Account, S. Account, T. Entity, and S. Entity are assigned at the group level and are not time based. The child reconciliations do not take on these attributes.
- No changes are saved if errors are found.

**IMPORTANT:** When you edit Account Group attributes, you must select the checkbox above the attribute for the change to be applied when you click **Save** . The Save button only displays after a checkbox is selected.

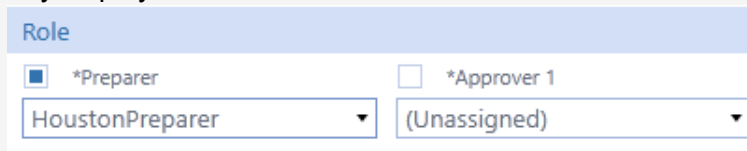

Role
<input checked="" type="checkbox"/> *Preparer
<input type="checkbox"/> *Approver 1
HoustonPreparer
(Unassigned)

**Delete:** Select one or more Account Groups to delete. Keep in mind:


- Local Admins can delete Account Groups that they are assigned to. RCM and OneStream Admins can delete any Account Group.
- Only Account Groups that have not been prepared in any period (current or prior) can be deleted.
- All child reconciliations must be removed from an Account Group before it can be deleted.

**Import:** Select an Excel .xlsx file to import that contains Account Groups to merge changes or add new records. You must close this file before importing it. This button is not accessible to Local Admins.

**Export:** Exports all Account Groups as a CSV file that is opened in Excel and used to edit or update group information. To import these updates, the user must add a Named Range starting with the letters 'xft' covering appropriate rows starting with the cell with the word *Application* in the top left cell. This file should then be saved in Excel xlsx format. See [Templates](#) for more information. This button is not accessible to Local Admins.

## Account Reconciliations

1	Reconciliation Groups			
2				
3	ReconID (ReconID) [Guid]	Wfk (WfProfileKey) [Guid]	Wsk (ScenarioId) [Int32]	GroupName [String]
4				
5	Application			
6	XFW_RCM_Recon			
7	Merge			
8	xfGuid#:[ReconID]::[NewGuid]	xfGuid#:[Wfk]	xfInt#:[Wsk]	xfText#:[GroupName]
9	522bf52a-5694-4500-8bc4-3ba2e4ed2681	!Clubs	!ActualAR	Fixed Assets - Clubs USD
0	a607ae21-713c-43b4-a067-a3dc8c046713	!Houston.Import	!ActualAR	AP Trade - Houston
1	801f8d29-4fbd-4bbd-9207-75f060f2d8fb	!Clubs	!ActualAR	AP Other - Clubs USD
2	2250ce23-45de-4562-9dfc-cc6b6d956eed	!Clubs	!ActualAR	Payroll - Clubs USD



**Template:** Opens a pre-filled Excel Template to load Account Groups. Note that some field entries (such as WF Profile and Recon Scenario) must start with “!” because the import process replaces those text values with a long numeric key. The How To tab contains further instructions on using the template. This button is not accessible to Local Admins.

1	ONESTREAM									
2										
3										
4	Reconciliation Account Groups									
5										
6	Account Group [String]	Required	Wf Profile (Must start with !)	Recon Scenario (Must start with !)	T.Account (String) (Filter/Drill)	S.Account (String) (Display)	T.Entity (String) (Filter/Drill)	S.Entity (String) (Display)	Account Currency (String)	Local Currency (String)
11	YourGroupName	TRUE	!YourWfProfile	!YourReconScenario	ValidAccount	GroupShortName	ValidEntity	GroupShortName	USD	USD
12										
13										
14										
15										
16										
17										
18	(Insert new rows between the blue bars)									

**Access:** Edit the access group for the selected Account Group.

## Tracking

Tracking Levels											
Name	Entity Active	Flow Active	IC Active	UD1 Active	UD2 Active	UD3 Active	UD4 Active	UD5 Active	UD6 Active	UD7 Active	UD8 Active
(Entity)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Entity Flow	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

## Account Reconciliations

This determines the granularity of reconciliations. The default entry is (*Entity*) which means each reconciliation will be done by entity and then account. There may be instances where dimensions need to be added to this combination. For example, an account such as Property, Plant and Equipment needs to be reconciled by Entity and Account, but also by the Flow dimension. The more dimensions you include will result in more reconciliations. Adding entries here allows for assignment later in the *Reconciliation Definition* screen. This page cannot be accessed by Local Admins.

**IMPORTANT:** If you plan to assign Tracking Levels to *Reconciliation Definitions*, do so before clicking the **Discover** button for the first time. After you run Discover, the records are added to the Inventory and cannot be removed.

## BalCheck

This determines the reconciliation's balance check granularity. Balance check levels can be created for any single dimension or combination of dimensions. This allows balances being pulled from a single source file to be split to the corresponding reconciliations at the same granularity of detail as is provided within Tracking Levels. These levels are used to populate the BalCheck Level within the Inventory. This page is not accessible by Local Admins.

Name	T. Entity	S. Entity	T. Account	S. Account	T. Flow	S. Flow	T. IC	S. IC	T. UD1	S. UD1	T. UD2	S. UD2	T. UD3	S. UD3	T. UD4	S. UD4	T. UD5	S. UD5
All Entities & Accounts	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
S. Account	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
S. Entity	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
S. Entity & S. Account	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
S. Entity & T. Account	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
T. Account	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
T. Entity	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
T. Entity & S. Account	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
T. Entity & T. Account	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

There are several types of Balance Checks that are prepopulated within the solution:

- **All Entities & Accounts:** As long as the Transformation Rules assigned pass their test, then there is included functionality to pull that *Balance Check* figure into the Reconciliation as an *Explanation*.
- **T.Entity:** Works by filtering the Balance Check items loaded to the Stage to just the values that match the Target Entity of the selected Reconciliation that is referencing the Balance Check workflow stage data.

## Account Reconciliations

---

- **S.Entity:** Works by filtering the Balance Check items loaded to the Stage to just the values that match the Source Entity of the selected Reconciliation that is referencing the Balance Check workflow stage data.
- **T.Account:** Works by filtering the Balance Check items loaded to the Stage to just the values that match the Target Account of the selected Reconciliation that is referencing the Balance Check workflow stage data.
- **S.Account:** Works by filtering the Balance Check items loaded to the Stage to just the values that match the Source Account of the selected Reconciliation that is referencing the Balance Check workflow stage data.
- **T.Entity & T.Account:** Works by filtering the Balance Check items loaded to the Stage to just the values that match the combination of Target Entity and Target Account of the selected Reconciliation that is referencing the Balance Check workflow stage data.
- **S.Entity & S.Account:** Works by filtering the Balance Check items loaded to the Stage to just the values that match the combination of Source Entity and Source Account of the selected Reconciliation that is referencing the Balance Check workflow stage data.
- **T.Entity & S.Account:** Works by filtering the Balance Check items loaded to the Stage to just the values that match the combination of Target Entity and Source Account of the selected Reconciliation that is referencing the Balance Check workflow stage data.
- **S.Entity & T.Account:** Works by filtering the Balance Check items loaded to the Stage to just the values that match the combination of Source Entity and Target Account of the selected Reconciliation that is referencing the Balance Check workflow stage data.

## AutoRec

AutoRec rules can be created and maintained by Reconciliation Global Admins and OneStream Admins. If an option is selected, that qualifier will allow for a reconciliation to automatically be reconciled. When creating new rules, selecting multiple item type criteria within one rule will permit any of the selected items to enable a reconciliation to automatically reconcile. If Zero Balance and Activity are both selected, both criteria must be satisfied to automatically reconcile. This page is also used to create an Expression and name the Expression on the AutoRec page. Changing the Expression on this page updates the rule throughout the Reconciliation Inventory if it is applied to multiple reconciliations. This page is not accessible by Local Admins.

**IMPORTANT:** If an AutoRec rule is used to Prepare or Fully Approve a reconciliation, it cannot be modified or deleted.

## Account Reconciliations

ADMINISTRATION - AutoRec Rules (Clubs, ActualAR, 2022M1)									
Definition Inventory Groups Tracking BalCheck AutoRec Notifications						Substitution Variable Selector:  Balance		Ctrl-C To Copy:  Balance	
AutoRec Rules									
Prepare Only	Name	B-Items	I-Items	S-Items	X-Items	Pulled Items	Zero Balance	Activity	Expression
<input type="checkbox"/>	Balance Check Only	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	UnexplainedBalance  > -1 and  Unexpl
<input type="checkbox"/>	Immaterial Balance	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Balance  < 3000 and  Balance  > -3000
<input type="checkbox"/>	Immaterial I Item	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Balance  < 100 and  Balance  > -100
<input type="checkbox"/>	Prepaid Amortization	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	UnexplainedBalance  = 0
<input type="checkbox"/>	Pulled Items and No Activity	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	UnexplainedBalance  = 0
<input type="checkbox"/>	Transaction Matching Items Check	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	UnexplainedBalance  > -1 and  Unexpl
<input type="checkbox"/>	Zero Balance No Activity Low Risk	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Risk.Level  = 10

- Prepare Only:** If selected, the reconciliation is auto reconciled to the Prepared status (Auto Prepared). The reconciliation still requires approval. If not selected, the reconciliation is auto reconciled to the Fully Approved status (Auto Fully Approved). The reconciliation will not require any approvals.
- B-Items:** (Balance Items) Balance Check items allow a reconciliation to auto reconcile if they agree to the reconciling currency balance. For Balance Check reconciliations, if only Balance Items should be allowed for AutoRec, only this option should be selected, and the rule created should be applied to reconciliations that have a BalCheck Level.
- I-Items:** Individually created items created in the *current* period will allow for AutoRec if the aggregate of the items agrees to the reconciling currency balance.
- S-Items:** Multi-period templates that support and agree to the reconciling currency balance allow a reconciliation to automatically reconcile. The booked period for the S-Item must be *prior* to the current period. If S-Items are created in the current period, auto reconciliation is prohibited.
- X-Items:** Items created from Transaction Matching transactions allow a reconciliation to auto reconcile. (X-Items are used with integrated solutions only.)
- Pulled Detail:** Detail items pulled from the prior period will allow AutoRec. This logic will apply to all Detail Item types.
- Zero Balance:** Will auto reconcile all reconciliations with a zero balance (for the reconciling currency, if Multi-currency is enabled).
- Activity:** Will auto reconcile if reconciliation activity for the reconciling currency has not changed or if the activity for the reconciliation is within the *Activity Limit* threshold established in the *Reconciliation Inventory*.

## Account Reconciliations

---

- **Expression:** This is a text box that allows for user defined text. Rule logic can include any item from the *Substitution Variable Selector* above the property grid.

Example:

`|BalanceAccount| < 1000 and |RiskLevel| = 'Low'`

To clarify, if an item type is selected, a reconciliation can automatically reconcile if that item type exists. If the item type is not selected and it exists within the reconciliation, the reconciliation will not automatically reconcile. If a qualifier (Zero Balance, Activity, or Expression) is selected all of the selected criteria must be met in order to automatically reconcile. For example, if Zero Balance is selected and an Expression exists, the reconciliation must have a balance of zero **and** meet the Expression criteria.

**IMPORTANT:** AutoRec rules cannot be run for Account Groups until FX rates have been entered for the period. This is because the source currencies need to translate to the Account Group currencies before reconciliation, and thereby automatic reconciliations can take place.


## Auto-prepared and Auto-approved Reconciliation States

These diagrams show how auto-prepared and auto-approved reconciliations move between states.


Auto-prepared reconciliations follow this flow:

## Account Reconciliations

---

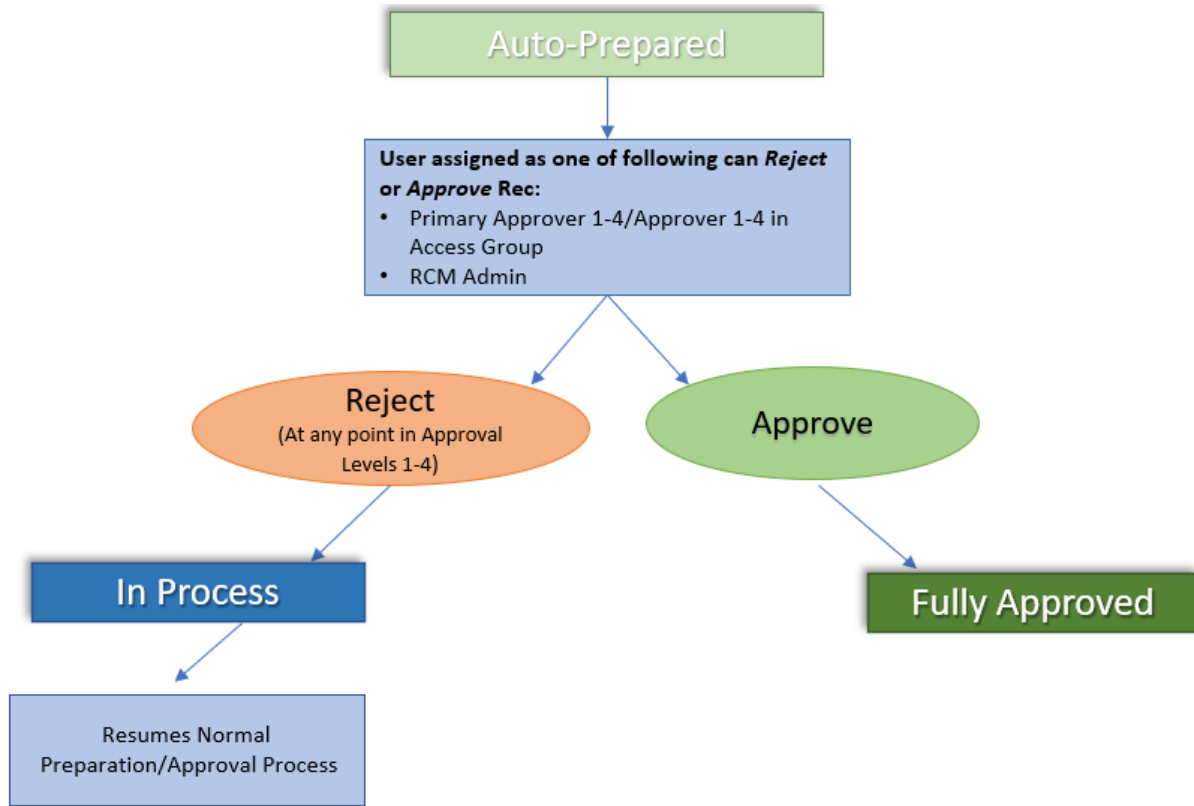

Fully approved auto reconciliations follow this flow:

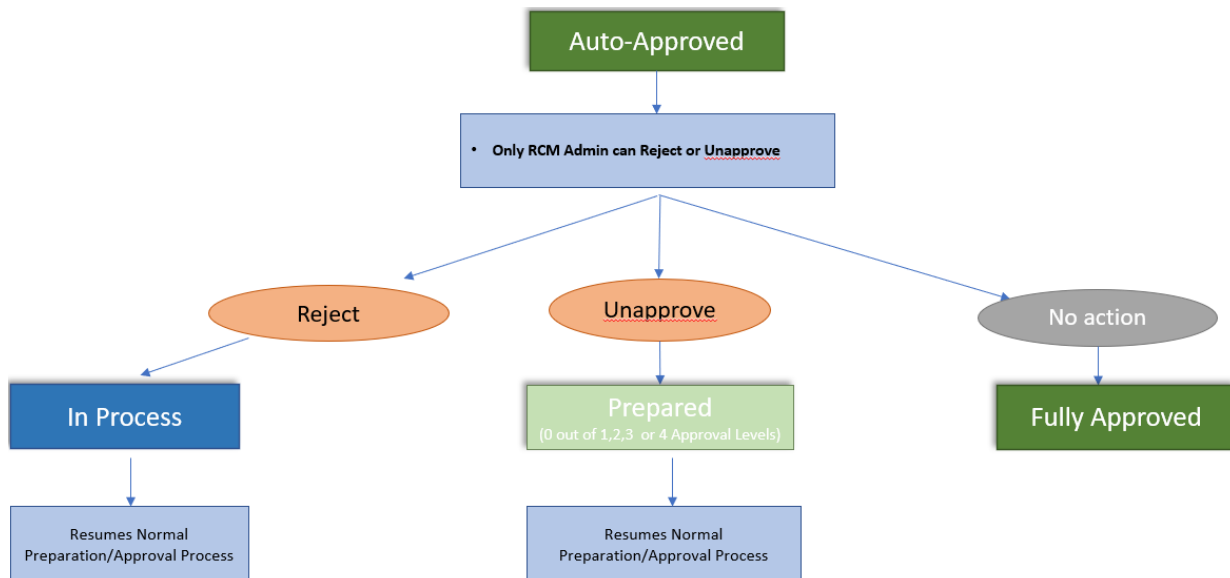

# Notifications

You can send email notifications to users when a reconciliation:

- Changes state such as when it gets prepared, rejected, or approved.
- Is approaching its Preparer or Approver due date.
- Is past its Preparer or Approver due date.

ADMINISTRATION (Clubs, ActualAR, 2022M1)

Definition Inventory Groups Tracking BalCheck AutoRec Notifications

Defer Refresh

Notification Methods											
Name	Prepared	Auto Prepared	Rejected	Approved	Unapproved	Comment	Balance Changed	Preparer Warning	Preparer Warning Days	Preparer Past Due	
Access Group Only	Access Group	Access Group	Access Group	Access Group	Access Group	Access Group	Access Group	Primary		5 Primary	
Accruals	All	None	All	All	All	None	All	Access Group		2 Access Group	
All Notifications	All	None	All	All	All	All	All	All		3 All	
Comment Primary	None	None	None	None	None	Primary	None	None		0 None	

**IMPORTANT:** To set up users in access groups to receive notifications, you must take two actions.

1. Set up as recipients on the **Notifications** tab as described below.
2. Select the **Notify** checkbox for the user in Access Control. See "Access Groups (Editor)" on page 27.

### Notification Methods

RCM and OneStream Administrators can set up which users get notified about reconciliation state changes.

**NOTE:** Only RCM and OneStream Administrators can create and edit notification methods. Local Admins cannot access the Notifications page but can apply notification methods to reconciliations that they are assigned to.

To create a new notification method:

1. Click **+** and enter a name for the new method in the **Name** column. Names must be unique and cannot contain special characters.

## Account Reconciliations

---

**NOTE:** The first six columns notify you of state changes that have already occurred. The Preparer and Approver columns are for pending reconciliations that are nearing or past their due date.

- **Prepared:** Email is sent to the assigned Primary Approver 1 and Assigned Approvers 1 in Access Group.
- **Auto Prepared:** Email is sent to the assigned Primary Approver 1 and Assigned Approvers 1 in Access Group.
- **Rejected:** Email is sent to the assigned Primary Preparer and assigned Preparers in Access Group.
- **Approved:** Email is sent to the next assigned Approver (Primary Approver 2-4 and Approvers 2-4 in Access Group). If there is only one level of approval, then no additional notification is sent.
- **Unapproved:** Email is sent to the next assigned Approver (Primary Approver 1-4 and Approvers 1-4 in Access Group).
- **Comment:** Email is sent to all assigned roles.
- **Balance Changed:** Email is sent to the assigned Primary Preparer and assigned Preparers in Access Group.
- **Preparer Warning:** Email is sent to notify that the reconciliation is approaching the Preparer due date.
- **Preparer Warning Days:** Enter the number of days (absolute value) before the Preparer due date that you want recipients to start receiving email notifications. For example, if you enter 5 days and the Preparer due date is 6/10/22, recipients would start receiving warning emails on 6/5/22 and stop receiving warning emails on 6/10/22.
- **Preparer Past Due:** Email is sent to notify that the reconciliation is past the Preparer due date.

## Account Reconciliations

---

- **Preparer Past Due Days:** Enter the number of days (absolute value) after the Preparer due date you want the recipients to stop receiving email notifications. For example, if you enter 5 days and the Preparer due date was 6/10/22, the recipients would start receiving past due emails on 6/10/22 and stop receiving past due emails on 6/15/22.
- **Approver Warning:** Email is sent to notify that the reconciliation is approaching the Approver due date.
- **Approver Warning Days:** Enter the number of days (absolute value) before the Approver due date you want recipients to start receiving email notifications.
- **Approver Past Due:** Email is sent to notify that the reconciliation is past the Approver due date.
- **Approver Past Due Days:** Enter the number of days (absolute value) after the Approver due date you want recipients to stop receiving email notifications.

**NOTE:** For multiple levels of approval, all approvers (Approver 1-4) will get email notifications until the reconciliation is fully approved. For example, if the reconciliation is approved at level one but is not yet approved at level 4, all approvers continue to get email notifications.

2. For each type of notification, select who gets notified:

- **All:** Notifications are sent to the applicable role for the primary and assigned to that role within the access group. For example, if the notification is for preparers it will go to anyone who is a primary preparer and a preparer assigned within the access group.
- **None:** No notifications are sent.
- **Primary:** Notifications are sent to users who are directly assigned as primaries on the reconciliation.
- **Access Group:** Notifications sent to users in the access group.

## Task Scheduler

In Task Scheduler under Reconciliation Manager, a new task ProcessNotifications\_RCM is added which is used to run the notification methods setup in Account Reconciliations. An administrator should only need to set up the Task Scheduler job once, and then any edits would be done on the Notification Methods tab.

# Security

Security in Account Reconciliations is split into:

- Design
  - Reconciliations Global Admin vs. OneStream Admin vs. Local Admin
  - Workflow Profile Security
  - Access Groups and Reconciliation Inventory Security
- Runtime
  - Workflow and Reconciliation Filtering
  - Roles
  - Segregation of Duties
- Dashboard Security

## Reconciliations Global Admin vs. OneStreamAdmin vs. Local Admin

There is a difference in permissions granted to the Reconciliations Global Admin, OneStream Administrator and a Local Admin both from a configuration and end user standpoint.

## Reconciliations Global Admin and OneStream Admin Permissions

Within Account Reconciliations Settings and Reconciliation Administration pages, any user in the *Security Role [Manage Recon Setup]* user group can change anything. This includes changing any Reconciliation Definition, Reconciliation Inventory, Account Groups, AutoRec, BalCheck, Mass Update, Tracking Levels and running *Discover* and *Process Reconciliations* from a Review-level Workflow Profile. This includes creating Access Groups and assigning the *Local Admin* flag to one or more members who can then continue managing related Reconciliation Inventory items and Account Groups.

On the *Reconciliations* page, these users can step in to prepare, approve, comment or view any reconciliation.

## Account Reconciliations

---

Note that these same rights apply to any OneStream System Administrator (anyone in the *Administrators Security Group*).

The Reconciliations Global Admin applies Access Groups to any Account Groups and newly discovered Reconciliation Inventory Items. By doing so, if the Access Group has at least one member that is marked as a Local Admin, they are making these items visible and editable by these Local Admins. If the Reconciliations Global Admin wishes the Local Admin to assign Reconciliation Inventory Items to Account Groups, they must first assign an Access Group to each Account Group and Reconciliation Inventory Item in order for these to be visible to the Local Admin. However, a Local Admin is able to create their own Account Groups if they assign a valid Access Group to it that is an Access Group that they manage.

## Local Admin Permissions

An Account Reconciliations user becomes a Local Admin when the Reconciliations Global Admin assigns them to an Access Group with the *Local Admin* flag designation and then assigns that Access Group to Reconciliation Inventory Items or Account Groups.

The Local Admin has certain abilities that are shared with a Reconciliations Global Admin, but which are limited in these areas:

## Account Groups

- Can create, view and edit only those Account Groups which an Access Group is assigned which they manage as Local Admin.
- Cannot delete, export or import Account Groups or use the Account Group Template.

## Administration

- Can navigate to the Reconciliation Administration page.
- Cannot see the Account Reconciliations Settings icon, which prevents them from making any changes to *Reconciliation Definitions*, *Tracking Levels* or seeing the *Settings* page to make changes, such as *Global Options*, *Control Lists* or *Certifications*. They cannot run *Discover*.

### Reconciliation Inventory Items

- Can view, edit and delete Reconciliation Inventory Items where the Access Group property is set to one that they manage. Can assign Reconciliation Inventory Items to Account Groups and other Access Groups that they manage.
- Cannot change the properties of any Reconciliation Inventory Item that they do not manage either manually or through the Reconciliation Inventory page or Mass Updates. Cannot assign a Reconciliation Inventory Item or Account Group to an Access Group they do not manage or to (Unassigned). Cannot assign a Reconciliation Inventory Item to an Account Group they do not manage or assign to (No Group) once already assigned to an Account Group.

### Reconciliation Inventory Mass Update

- Can perform Mass Updates to Reconciliation Inventory Items they manage.
- Cannot assign a Reconciliation Inventory Item to an Access Group they do not manage or to (Unassigned). Cannot assign a Reconciliation Inventory Item to an Account Group they do not manage or assign to (No Group) once already assigned to an Account Group.

### Access Groups

- Can create, modify and delete the members of the Access Groups that they manage.
- Cannot create, delete, export, import or perform Mass Updates on Access Groups. Cannot change the Local Admin property on any Access Group user or create new Access Group members of the type Local Admin. They cannot delete their own record.

### Preparer and Approver Workflow page

- Can perform activities in the *Preparer* and *Approver Workflow* page as any end user would, restricted to their assigned Access Group Role.
- Cannot click the *Process Reconciliations* button on Review-level Workflow Profiles, which is reserved for the Reconciliations Global Admin.

### Analysis and Reporting page

- Can review any report with the same filters applied to any end user, yet the Reconciliation Access Groups Report will be filtered to only the Access Groups they manage.

## Workflow Profile Security

The primary access to Reconciliations rests in access to the related Workflow Profiles in this way:

- If a user is only present in an Access Group in the Workflow Profile, they may be able to see certain Reconciliations.
- If a user is in the Workflow Execution Group for the Workflow Profile, they can also Complete that Workflow Profile.

## Access Groups and Reconciliation Inventory Security

Once a user has access to enter the Account Reconciliations interface via the Workflow Profile, they now have a chance to see certain Reconciliations due to their inclusion in an Access Group that is assigned to each Reconciliation Inventory Item or Account Group. Visibility is granted by assigning these Access Groups to Reconciliation Inventory Items.

## Workflow and Reconciliation Filtering

The Workflow Profiles that the user can see is directly related to whether they are in the Access Group of a given Workflow Profile.

The Reconciliations that the user can see is directly related to this user's inclusion in an Account Reconciliations Access Group or if they are in a User Group that is assigned to the *Security Role [Recon View Only]* option under *Global Options*. The Reconciliation Inventory Items and Reconciliation Inventory Account Groups the user sees when entering a Workflow Profile is directly related to the Workflow Profile listed on each as assigned during design under the *Reconciliation Inventory*.

## Roles

The following tables describe the reconciliation actions that can be performed by different roles.

## In Process Reconciliations

	Assigned Role			
Actions	Viewer	Commenter	Primary or Access Group Preparer	Primary or AG Approvers 1-4
View	X	X	X	X
Add comment		X	X	X
Prepare			X	X

	Assigned Role		
Actions	Local Admin	RCM Admin	OS Admin
View	X	X	X
Add comment		X	X
Prepare		X	X
Edit attributes	X	X	X

## Prepared Reconciliations

	Assigned Role			
Actions	Viewer	Commenter	Primary or Access Group Preparer	Primary or AG Approvers 1-4
View	X	X	X	X
Add comment		X		X
Recall			X	X
Approve				X
Reject				X

	Assigned Role		
Actions	Local Admin	RCM Admin	OS Admin
View	X	X	X
Add comment		X	X
Recall		X	X
Approve		X	X
Reject		X	X

## Fully Approved Reconciliations

Actions	Assigned Role				
	Auditor	Viewer	Commenter	Primary or Access Group Preparer	Primary or AG Approvers 1-4
View	X	X	X	X	X
Add comment	X		X		X
Reject					X
Unapprove					X


Actions	Assigned Role		
	Local Admin	RCM Admin	OS Admin
View	X	X	X
Add comment		X	X
Reject		X	X
Unapprove		X	X

### Segregation of Duties

Account Reconciliations honors strict Segregation of Duties. You may not perform more than one security role on a reconciliation in a specific time period. For example, if you act as a Preparer for a reconciliation, you cannot perform any level of approval for the same reconciliation. If you approve a reconciliation at Level 1, you cannot approve at any higher level. After you change the state of a reconciliation in a given month, you cannot move that reconciliation forward in the process beyond that point.

An Approver 2 or above can unapprove a reconciliation more than once. You can always send a reconciliation back down the chain of approval as long as you have the assigned role or higher to do so. But if you have already moved it up the approval chain you cannot move it forward again.

Sample Segregation of Duties error message:

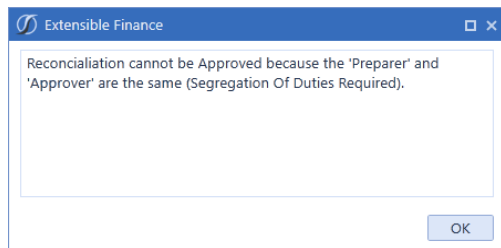

### Dashboard Security

Default Maintenance Group security on the Account Reconciliations Dashboard Maintenance Unit is set to Administrators. This should remain at Administrators or another restrictive User Group to prevent unauthorized access.

## Using Account Reconciliations

Typically, you start the reconciliation process by importing the current month's general ledger data into the Actual scenario in OneStream ("Actuals"). Then you can prepare reconciliations.

Click  to open the *Reconciliations* page.












## Workflow Actions


### Process

This is the first step that you take when working with reconciliations. Click **Process** to update balances for all reconciliations. The Process action has certain requirements to run and has different behavior based on the type of workflow profile association:

- *Base Input Workflow Profile* (used to load data): Anyone included in the access group of the workflow profile can click this button to retrieve and update the balances of this workflow profile's reconciliations. You can't proceed with the reconciliation until *Process Reconciliations* is finished.
- *Review level Workflow Profile* (reviews data and makes no inputs): Anyone in the *Security Role (Manage Recon Setup)* user group under Account Reconciliation Global Options can click this button.

Click the Task Activity icon  to show the **Process Reconciliations** process results:

Task Activity					
    <input type="checkbox"/> Show Tasks for all Users 					
	Task Type	Description	Duration	Task Status	
	 Data Management	WP#Clubs:S#Actual:T#2022M3 - Reconciliation Mass Action	0.00:00:00.390	Completed	
	 Data Management	Calculate Nominal Scenarios	0.00:00:00.314	Completed	
	 Process Cube	Cb#GolfStream:E#Clubs:S#Actual:T#2022M3 (Multiple Data	0.00:00:13.783	Completed	

**NOTE:** When *Process Reconciliations* is complete, view updated balances by clicking **Show Reconciliations Page** .

#### *FX Translation Warning (Multi-currency Implementations)*

You can create detail items before entering FX Rates. This allows you to prepare reconciliations before the close of the period and possibly before the availability of FX Rates. Create a detail item by entering the value and selecting the currency type. If not specified, the detail item currency type defaults to the account currency type. However, the values for Account, Local, and Reporting display as zero (unless the translation is one to one) after saving. Additionally, if OneStream is used to translate either account or reporting reconciliation balances from local, these balances display as zero until FX Rates are entered. The following warning symbols may display:

## Account Reconciliations

---

- *Red FX*: FX Rates are not entered for the period.
- *Yellow FX*: FX Rates are missing. Hover over the icon to view the missing rates.
- *Yellow FX!*: FX Rates are updated but a Process is necessary.

If necessary, the Administrator must run a Process to translate all reconciliation balances and detail items for the entire Reconciliation Inventory. An Administrator running Process within any reconciliation meets this requirement.

**NOTE:** It is strongly recommended that an Administrator run Process after entering FX Rates. This ensures that all balances are translated and consistent throughout the solution.

If an Administrator enters the FX Rates and does not Process, end users can still see translated account and reporting balances and translated value for detail items, but translation is only performed on reconciliations to which they have access.

## All Audit


Only the Administrator or users in the *Security Role (Manage Recon Setup)* user group can run this option. When you click **All Audit**, a Data Management Sequence called `CreateAuditPackage_RCM` executes. It generates and exports all reconciliation audit packages for the current workflow view.

This creates multiple compressed folders under a single folder that each contain a reconciliation report and supporting file attachments, as well as a consolidated reconciliation report for all reconciliations.

This Data Management Sequence places its output under the OneStream File Share under `Applications/<APPLICATIONNAME>/DataManagement/Export/` as shown here:

## Account Reconciliations

---

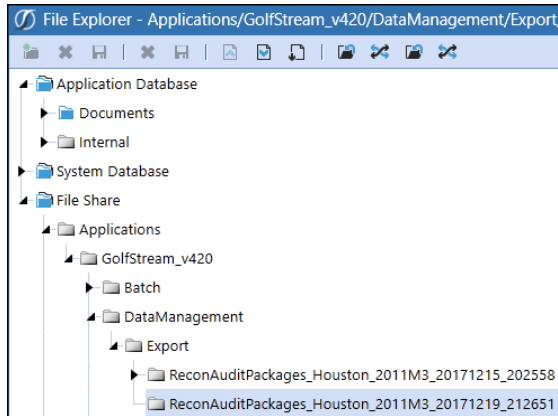

## Complete Workflow

If you have the appropriate security level and all reconciliations are approved, you can click **Complete WF**. If you later need to set the workflow in process, you can click **Revert Workflow**.

## Reconciliations Page

On the **Reconciliations** page, you can:

- View and filter the list of reconciliations. The list can be filtered by target account, role, preparation status, and other categories.
- View statistics for the filtered list of reconciliations including percent complete, number rejected, and number fully approved.
- Reorder columns and search the list of reconciliations.
- View and update reconciliation details, including properties, comments, supporting documents, and so on.
- Perform actions such as Prepare or Approve for single or multiple reconciliations.

## Filters

You can use filters to limit the content in the reconciliation grid. The filters can be used together to create a list of reconciliations that are specific to the circumstances you want to view. For example, you can filter to see in process reconciliations that are past due for a specific target account.

**Role:** Select a role to filter the list of reconciliations:

## Account Reconciliations

---

- **Administrator:** All reconciliations regardless of assigned role.
- **Any User Role:** Reconciliations where you are assigned as a Commenter, Viewer, Primary Preparer, Primary Approver, Preparer, or Approver via an access group.
- **Primary Preparer:** Reconciliations where you are assigned as Primary Preparer on the Reconciliation Inventory.
- **Primary Approver:** Reconciliations where you are assigned as Primary Approver on the Reconciliation Inventory.
- **Primary Preparer/Approver:** Reconciliations where you are assigned as Primary Preparer or Primary Approver on the Reconciliation Inventory.
- **AG Preparer:** Reconciliations where you are assigned as Preparer via an Access Group.
- **AG Approver:** Reconciliations where you are assigned as Approver via an Access Group.
- **AG Preparer/Approver:** Reconciliations where you are assigned as Preparer or Approver via an Access Group.
- **Any Preparer/Approver:** Reconciliations where you are assigned as Primary Preparer or Approver on the Reconciliation Inventory or a Preparer or Approver from an Access Group.
- **Viewer:** Reconciliations where you are assigned as Viewer. You can view reconciliations in any state such as In Process, Prepared, and Fully Approved.
- **Commenter:** Reconciliations where you are assigned as Commenter.
- **Auditor:** This option only displays for a user in the Auditor role.

The default role is *Administrator* for Admins and *Any User Role* for other users. To set a different default role, change the value of the *SelectedFilterBarRole\_RCM* parameter under *Dashboards*.

**NOTE:** If you change the default role, you must reset the parameter value when you upgrade Account Reconciliations because the upgrade sets the default role back to *Preparer*.

**T. Account:** List of target accounts for reconciliations assigned to the workflow profile. Target accounts are defined in the reconciliation definition. Select **All** or select a target account.

**State:** Select **All** or select one or more state options.

## Account Reconciliations

---

- **In Process:** Reconciliations that are not yet prepared.
- **Prepared:** Reconciliations in a prepared state. Does not include reconciliations that are partially or fully approved but were previously in the Prepared state. This does not include auto prepared.
- **Partially Approved:** Reconciliations that have at least one level of approval and require additional approvals.
- **Fully Approved:** Reconciliations that have received all manual approvals. This does not include auto approved.
- **Rejected:** Reconciliations that have been rejected by the approver.
- **Balance Changed:** Reconciliations where the balance was changed.
- **Auto Prepared:** Reconciliations that were auto prepared.
- **Auto Approved:** Reconciliations that were auto approved.

**Miscellaneous:** Select **None** or select one or more options.

- **Failed Auto Rec:** Reconciliations that did not meet the auto reconciliation rules applied in the inventory.
- **Frequency Changed:** Frequency for the reconciliation was changed in the workflow period. Reconciliations with this status are hidden by default and not included in the total. Use this filter to see these reconciliations.
- **High Risk:** Marked as high risk in the inventory.
- **Improper Sign:** Balances for the period are not aligned with the sign as set in the reconciliation inventory.
- **Past Due:** Past due date or were completed after the due date.

## Status Bar

The status bar displays statistics for the reconciliations displayed in the grid. When you change filter selections, the status bar refreshes to show the statistics for the updated list.

Total: <b>206</b>	In Process: <b>185</b>	Prepared: <b>0</b>
% Done: <b>8 %</b>	Balance Changed: <b>5</b>	Partially Approved: <b>0</b>
	Rejected: <b>0</b>	Fully Approved: <b>16</b>

## Account Reconciliations

---

**Total:** The total number of reconciliations displayed in the grid and that are to be completed for the period.

**Percent Done:** The percentage of reconciliations that have been fully approved or were auto approved . Only reconciliations currently displayed in the grid are used to generate this number. If you change filters to change the reconciliations list, this number changes accordingly.

**In Process:** Number of reconciliations that are in process.

**Balance Changed:** Number of reconciliations that were loaded in one state, but the balance changed either after it was marked *Prepared* or while the item was set to *In Process*.

**Rejected:** Number of reconciliations rejected by an approver.


**Prepared:** Number of reconciliations prepared by a preparer or auto prepared, where not yet approved.

**Partially Approved :** Number of reconciliations that have received some level of approval, but not all.

**Fully Approved:** Number of reconciliations that have received all approvals, including auto approved reconciliations.

This diagram shows how reconciliations move from state to state:

# Account Reconciliations

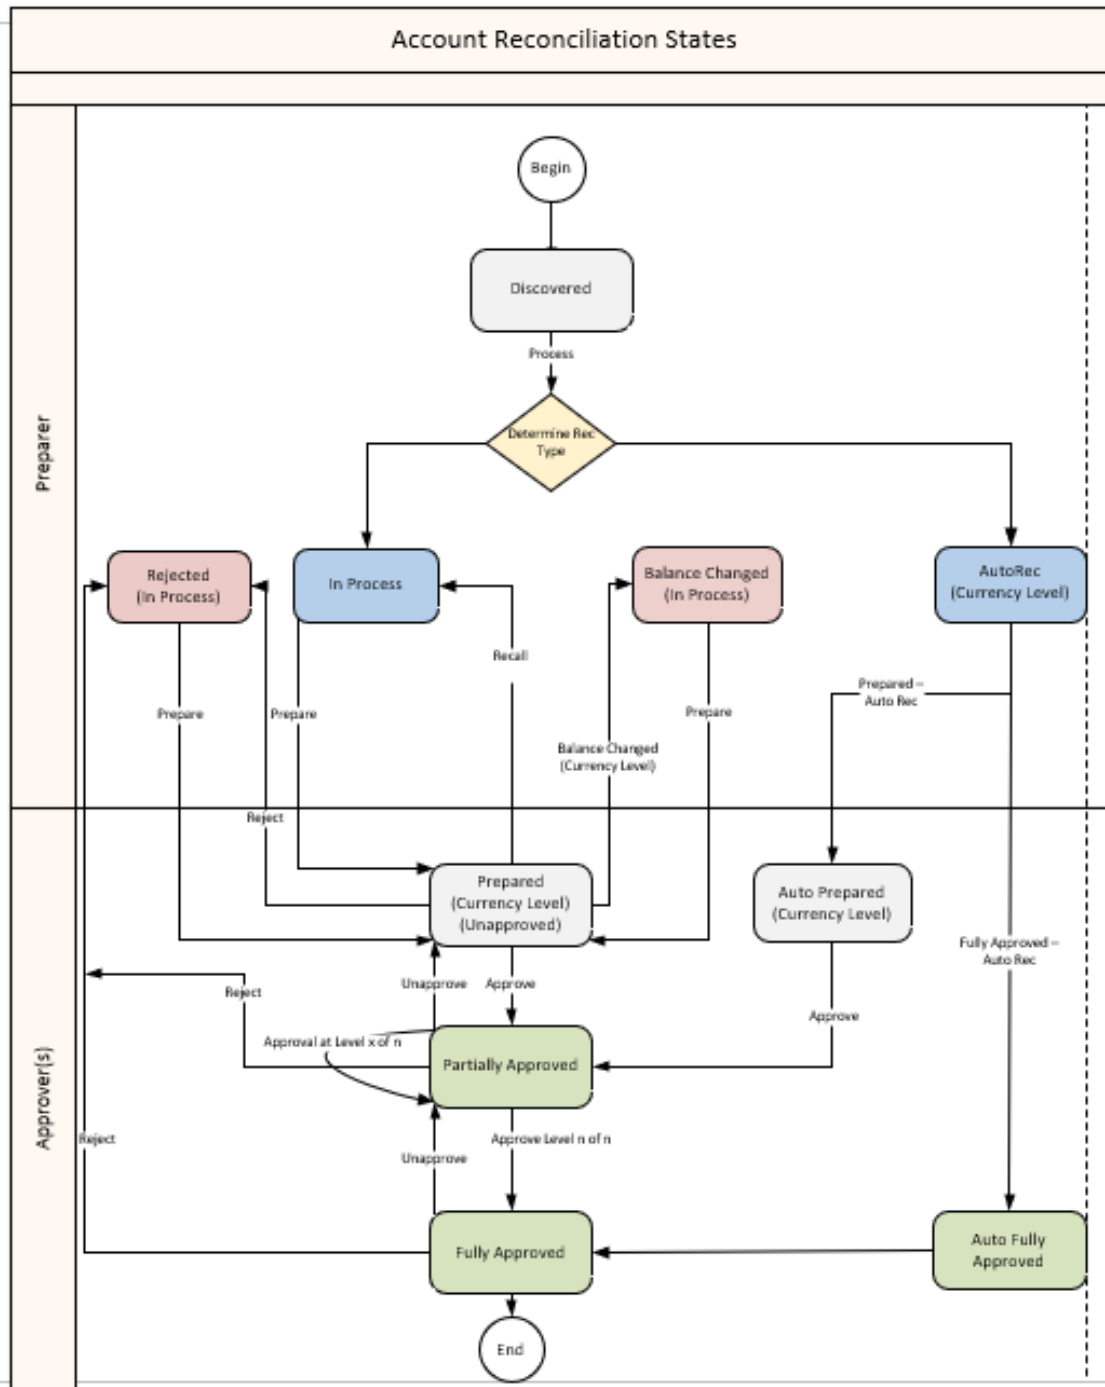

### Grid Columns

To show, hide, and order columns in the grid, right click on the grid and select **Column Settings**. Move columns between the Hidden and Visible columns using the left and right arrow buttons. Order the columns by moving them up or down the **Visible Columns** list. You can also drag and drop column headers within the grid. Rearranged column order is retained when you change to a different page or window.

The grid columns are determined by the reconciliation inventory. In addition to the columns from the reconciliation inventory, these columns also display. See "Reconciliation Inventory" on page 37.

**State and State Text:** Displays reconciliation states:

- In Process
- Balance Changed
- Rejected
- Prepared
- Partially Approved
- Fully Approved
- Auto Prepared
- Auto -Approved

**Tracking Detail:** Additional dimensional detail if tracking levels are set beyond entity and account.

*Multi-currency Solutions:* If Multi-currency is enabled, all three currency levels are displayed on the grid for the entire reconciliation inventory, including single currency reconciliations. You can sort by currency type for any of the currency levels.

**AutoRec Rule:** Assigned AutoRec rule or, if the reconciliation does not have one, (Unassigned).

**Type :** Account type such as Asset.

**Preparer Due Date :** Due date the preparer needs to prepare the reconciliation by. Calculated off of the close date and Preparer Workday Due set up in the Inventory Page.

## Account Reconciliations

---

**Preparer Due-In:** Number of days if the due date minus today's date is a positive number. This is based on the Preparer Due Date.

**Preparer Past Due:** Number of days if today's date minus the due date is a positive number. This is based on the Preparer Due Date.

**Approver Due Date :** Due date the approver needs to approve the reconciliation by. Calculated off of the close date and the Approver Workday Due set up in the Inventory Page.

**Approver Due-In:** Number of days if the due date minus today's date is a positive number. This is based on the Approver Due Date.

**Approver Past Due:** Number of days if today's date minus the due date is a positive number. This is based on the Approver Due Date.

**Process User :** Last user to run Process.

**Process Time:** Last time Process was run that checks for a balance change even if the reconciliation was previously fully approved.

**Update User :** The user who last took action on the reconciliation.

**Update Date:** The date and time the last user took action on the reconciliation.

**Approval Level:** Displays the current approval level of the reconciliation.

**Balance:** Balance for the selected reconciliation.

**Currency Type:** Currency type, such as EUR or USD.

**Explained:** The amount of balance explained.

**Unexplained:** Amount of the balance not yet explained.

**Activity :** Calculates to the prior reconciliation period, not the last period based on the reconciliation frequency.

**NOTE:** Multi-currency implementations display Balance, Currency Type, Explained, Unexplained, and Activity for all three currency levels.

## Reconciliation Workspace

When you select a reconciliation from the list, details display below the list.

**IMPORTANT:** Unless otherwise noted, fields are editable for the current booked period.

### Detail Items

This is a grid of explanations of reconciliations.

**O (Multi-currency Solutions):** Identifies which translated currency levels were overridden for the detail item.

- **A:** Account
- **L:** Local
- **R:** Reporting

**NOTE:** If supporting documentation is required for overrides and attachments were not provided, a message displays reminding you that supporting documentation is required. It is recommended to filter the detail items to show only items where overrides exist (for example, filter on column “O”). That way a list of items that only include overrides is visible.

**R** Identifies the type of reconciliation detail item.

- **S:** Item imported via a multi-period template as a schedule.
- **I:** Individually explained detail item.
- **T:** The item was imported via a template.
- **B:** The explanation is for a balance check reconciliation. The value is pulled from the related workflow profile that loaded and checked the detail with transformation rules.
- **X:** The item was created from Transaction Matching. Used with integrated solutions only.

**NOTE:** After B and X items are created, Item Type, Item Name, Reference 1 and Reference 2 cannot be changed. Only the Item Comment field can be edited. A new detail item must be created if the Preparer wants to modify an imported item.

**Amount:** The amount explained.

**Item Type:** Type of reconciliation detail (from *Control Lists*) that drives later reporting. For example, the status of *Correction (BS)* because that is a status that may draw a level of review.

**Item Name:** Description of item. Item Name cannot be blank.

**Item Comment:** Additional comments. The Item Comment field is always editable.

## Account Reconciliations

---

**Booked Period:** Period related to this explanation based off workflow time and is not editable.


**Transaction Date:** Date of the transaction. When creating a detail item, the transaction date defaults to the last day of the current workflow period. You can change the date to be any date from the current workflow period or a prior period. After you save the detail item, you cannot change the transaction date.

**Aging:** Calculated upon Save based on the period end date minus the transaction date. For example, if the transaction date is January 15 and the period end date is January 31, the aging is 16 days.

**Reference:** Text input fields used for additional references.

**User /Time Stamp (UTC):** The user who made the explanation and when it happened.


## Adding Detail Items

To add detail items, click **+**, enter detail information, and then click .

**NOTE:** Item Name cannot be blank.


## Deleting Detail Items

To delete detail items:

1. Take an action:
  - To delete specific items, select the check box next to each item.
  - To delete all items, select the check box at the top of the column.
2. Click .


**NOTE:** Items and their associated documentation are deleted. If multiple items are selected, R-docs are not deleted.

## Standard Explanation Actions



## Account Reconciliations

**Prior Items** : Gives you the option to pull items forward or copy items from the prior period. Either option will allow you to save a large amount of time by not having to re-explain the same reconciliation. Copy is intended to allow detail items from prior periods to be used as template, where changes can be made, and pull is to carry the specific item and documentation into the next period. You may select multiple items, or a single item, to copy or pull forward at once.

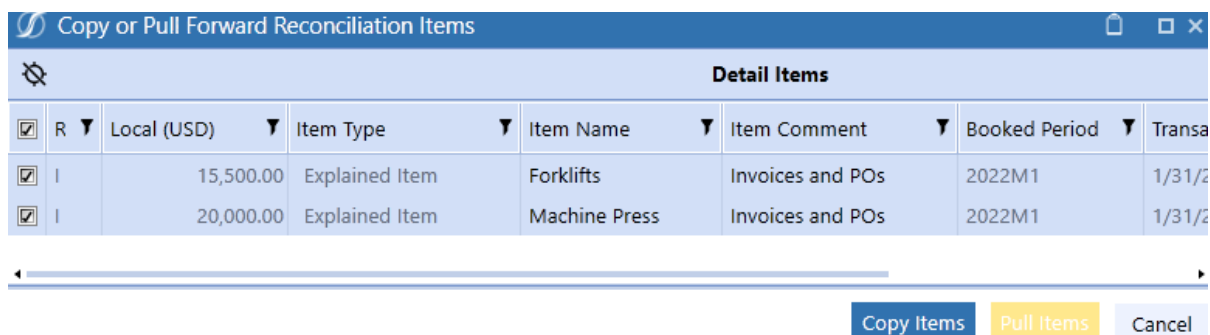

Copy or Pull Forward Reconciliation Items							
Detail Items							
<input checked="" type="checkbox"/>	R	Local (USD)	Item Type	Item Name	Item Comment	Booked Period	Transa
<input checked="" type="checkbox"/>	I	15,500.00	Explained Item	Forklifts	Invoices and POs	2022M1	1/31/2
<input checked="" type="checkbox"/>	I	20,000.00	Explained Item	Machine Press	Invoices and POs	2022M1	1/31/2

Pull replicates the selected detail items which cannot be edited in the current period. Associated documents are pulled forward. The booked period will always be the period that the item was initially created. When a detail item is pulled forward, the transaction date remains the initial transaction date when the item was created. Aging is recalculated for the current workflow period end date, and changes can be made to the Item Comment field only.

Copy replicates the selected detail items which can be edited in the current period. Associated documents are not copied. When detail items are copied, the booked period for the newly created item becomes the current period and the transaction date defaults to the last day of the current period. You can edit the transaction date so that it properly reflects the actual date the transaction took place.

**NOTE:** You can pull forward a detail item with a blank Item Name but if you change any field on the item, you must add in an Item Name to be able to save it.

I-Items that have been pulled forward and used to create detail items in subsequent periods cannot be deleted. When a detail item is pulled forward into the current period, the supporting I-Docs cannot be deleted or edited.

You cannot pull forward X-items (used with integrated solutions), B-items, or S-items.

**Multi-currency Solutions:** For items pulled forward, the detail amount and currency type are pulled forward. All other balances for the detail item are translated using the current month's FX rates. An exception exists when a currency level has been overridden.

## Account Reconciliations

In the case where overrides exist, the overridden balance remains and is pulled forward period over period. Overrides on pulled forward Multi-currency items cannot be edited. If a pulled forward Multi-currency item is pulled into a current period that does not have FX rates, the Local, Account, and Reporting amounts will be translated to zero until FX rates are populated and Process is re-run.


**Pull R-Docs:** Pulls the documents forward from the prior period depending on the frequency of reconciliation.

**T-Doc:** Imports a template document that adds new reconciliation detail items.

**NOTE:** Detail Item Name cannot be blank.

This document is stored in the system and displayed under **Reconciliation Support** with a T symbol. Below is an example of the basic template being completed.

**NOTE:** The Consolidation Account, the GL Account, and the GL balance are brought into the template when launched.

 Account Reconciliations			
<b>Basic Template</b>		7/23/2020 8:25	
<b>10000 - Petty Cash</b>			<b>Asset</b>
	<b>Account</b>	<b>Entity</b>	
<b>Consolidation Account:</b>	10000	Augusta	
<b>GL Account:</b>	10030	54	
<b>GL Balance:</b>			<b>1,001,256.31</b>
<b>Reconciliation Detail:</b>			
Item Type	Item	Explanation	Amount
<b>Explained Balance:</b>			<b>-</b>
<b>Unexplained Difference:</b>			<b>1,001,256.31</b>

## Account Reconciliations

**Template:** Downloads the template stored with this *Reconciliation Definition* or *Reconciliation Inventory* item. You can then fill out the template and import it as a T-Doc or S-Doc.

**S-Doc:** Imports a template document that adds new reconciliation detail items for multiple periods.

**NOTE:** Detail Item Name cannot be blank.

This document is stored in the system and displayed under **Reconciliation Support** with an S symbol. Below is an example of the detail portion of a multi-period template being completed.

This document opens like the T-Doc example above, but there is an additional column in the Detail section in which the user can list the period in which this reconciliation detail item should apply. The user should use the syntax of adding an exclamation point (e.g. !2018M1) before the OneStream time period as in this example:

<b>Amortization Detail:</b>				
Item Type	Item	Explanation	Amortization Period	Amount
Explained Item	Monthly Amortization	For 2011M3	!2011M3	5,795.73
Explained Item	Monthly Amortization	For 2011M4	!2011M4	6,318.73
Explained Item	Monthly Amortization	For 2011M5	!2011M5	6,841.73
Explained Item	Monthly Amortization	For 2011M6	!2011M6	7,364.73
Explained Item	Monthly Amortization	For 2011M7	!2011M7	7,887.73
Explained Item	Monthly Amortization	For 2011M8	!2011M8	8,410.73
Explained Item	Monthly Amortization	For 2011M9	!2011M9	8,933.73
Explained Item	Monthly Amortization	For 2011M10	!2011M10	9,456.73
Explained Item	Monthly Amortization	For 2011M11	!2011M11	9,979.73
Explained Item	Monthly Amortization	For 2011M12	!2011M12	10,502.73
<b>Total Amortization</b>				<b>81,492.30</b>

**S-Items:** View all S-Doc items associated with the selected reconciliation, regardless of the time period.

Reconciliation S-Doc Items							
Local (USD)	Item Type	Item Name	Note	Booked Period	User	Time Stamp (UTC)	
81,198.82	Explained Item	Remaining Balance	AAA	2018M1	Admin	3/5/2019 4:45:28	
76,807.51	Explained Item	Remaining Balance	Progressive	2018M1	Admin	3/5/2019 4:45:28	
73,817.11	Explained Item	Remaining Balance	AAA	2018M1	Admin	3/5/2019 4:45:28	
66,435.40	Explained Item	Remaining Balance	AAA	2018M1	Admin	3/5/2019 4:45:28	
69,825.01	Explained Item	Remaining Balance	Progressive	2018M1	Admin	3/5/2019 4:45:28	
59,053.69	Explained Item	Remaining Balance	AAA	2018M1	Admin	3/5/2019 4:45:28	
62,842.51	Explained Item	Remaining Balance	Progressive	2018M1	Admin	3/5/2019 4:45:28	
55,860.01	Explained Item	Remaining Balance	Progressive	2018M1	Admin	3/5/2019 4:45:28	
51,671.98	Explained Item	Remaining Balance	AAA	2018M1	Admin	3/5/2019 4:45:28	
48,877.51	Explained Item	Remaining Balance	Progressive	2018M1	Admin	3/5/2019 4:45:28	
44,290.27	Explained Item	Remaining Balance	AAA	2018M1	Admin	3/5/2019 4:45:28	
41,895.00	Explained Item	Remaining Balance	Progressive	2018M1	Admin	3/5/2019 4:45:28	
36,908.56	Explained Item	Remaining Balance	AAA	2018M1	Admin	3/5/2019 4:45:28	

## Balance Check Explanation Actions

These actions display only for balance check reconciliations. For reconciliations that have a Bal-Check assigned, if this is also set with the AutoRec rule to *Legacy*, the AutoRec process automatically pulls the balance from the workflow profile assigned if the status of the related *BalCheck WF Profile* is *Completed*.

Detailed balance check of an *Account Group*:

State	Approval Level	T.Account	S.Account	T.Entity	S.Entity	Tracking Detail	Acct. Balance	Acct. Cur.	Acct. Explained	Acct. Unexplained	Acct. Activity
In Process	0 of 1	16000 - Machinery & Equipme	12340	Frankfurt	FRANKFU		6,006.67	EUR	0.00	6,006.67	6,006.67
In Process	0 of 1	16000 - Machinery & Equipme	12360	Frankfurt	FRANKFU		105,400.92	EUR	0.00	105,400.92	105,400.92
In Process	0 of 1	16000 - Machinery & Equipme	Machinery & Equip	Houston	Houston		0.00	---	0.00	0.00	0.00

T.Account	S.Account	T.Entity	S.Entity	Tracking Detail	C.Local Bal.	Account Group
16000	12340	South Houston	South		310,246.92	GRPMachineryEquipment
16000	12360	Houston Heights	Heights		9,476,249.16	GRPMachineryEquipment
16000	12340	Houston Heights	Heights		206,831.28	GRPMachineryEquipment
16000	12360	South Houston	South		14,214,373.76	GRPMachineryEquipment

**Pull B-Chk:** This *Balance Check Explanation* value is pulled from the related *Workflow Profile* that has been loaded and successfully validated. The detail *Item Name* is automatically set to the name of the *BalCheck Workflow Profile* and *Balance Check Level* associated with the reconciliation.

**NOTE:** If this workflow profile is not in a prepared state or has failed, this balance will not be pulled and the user is notified.

- **Multi-currency Solutions:** When performing balance checks for multi-currency reconciliations, the balance is loaded to the *Detail Amount* column in the detail items grid. Unless a currency type is identified within the data source, it is assumed that the currency type for the *Detail Amount* is the same as the account currency for the reconciliation.

If the transaction currency type is different and is not provided within the data source, it must be manually changed within OneStream after the balance has been pulled into the reconciliation. If multiple currency types exist within the source file, each currency type is aggregated and shown as a summary detail item within the reconciliation. The *Detail Amount* for each currency type is translated to the three reconciliation currency levels (Account, Local, and Reporting) upon pulling the balance.

## Account Reconciliations

An exception exists when Account, Local, or Reporting balances are provided within the BalCheck source file. If any line within the BalCheck file contains Account, Local, or Reporting balances, or any combination of the three, OneStream assumes an override has occurred and accepts those balances as the amount to be shown on the reconciliation.

It is recommended that either all or no lines contain the currency level balances, and overrides are performed within the system. Otherwise, balances may appear incorrect. Furthermore, if any level of currency is provided, the reconciliations need be set up to allow overrides within the inventory or the BalCheck pull will fail.

Status	Status Text	T.Account	S.Account	T.Entity	S.Entity	Tracking Detail	Acct. Balance	Acct. Cur.	Acct. Explained	Acct. Unexplained	Acct. Activity
AutoRec - Approved	11000 - Trade Receivables	GRP - Global AR	Clubs	Clubs			74,596,079.07	CAD	74,596,079.07	0.00	2,459,127.88
Inprocess	16000 - Machinery & Equipmen	GRP - Machinery & Equipmer	Houston	Houston			0.00	---	0.00	0.00	0.00
AutoRec - Approved	11200 - IC Receivables	GRP - IC SouthHouston_Mont	Clubs	Clubs			0.00	USD	0.00	0.00	65.18
Inprocess	11200 - IC Receivables	GRP - IC Houston_Montreal	Clubs	Clubs			270.85	USD	1,215.00	-944.15	46.18
AutoRec - Approved	11200 - IC Receivables	GRP - IC Houston_Carlsbad	Clubs	Clubs			0.00	---	0.00	0.00	0.00
Inprocess	20000 - Trade Accounts Payabl	GRP - AP Trade	Houston	Houston			0.00	---	0.00	0.00	0.00
Inprocess	10000 - Petty Cash	10030	Augusta	54			0.00	---	0.00	0.00	0.00
Inprocess	10000 - Petty Cash	10030	Carlsbad	42			0.00	---	0.00	0.00	0.00
Approved 1	10000 - Petty Cash	11080	Frankfurt	FRANKFU			810.00	EUR	810.00	0.00	16.18
Approved 1	10000 - Petty Cash	11080	Houston Heights	Heights			0.00	---	0.00	0.00	0.00
Inprocess	10000 - Petty Cash	11080	Montreal	68			900.00	CAD	900.00	0.00	18.18
Inprocess	10000 - Petty Cash	11080	Quebec City	70			1,215.00	CAD	0.00	1,215.00	24.18

Account (CAD)	Local (EUR)	Reporting (USD)	Balance	Explained	Unexplained	Activity	Status
74,596,079.07	\$4,165,922.01	\$4,165,922.01	74,596,079.07	74,596,079.07	0.00	2,459,127.88	AutoRec
		73,205,180.64	73,205,180.64	73,205,180.64	0.00	1,619,510.69	Approval: AutoRec (1 of 1)

O	R	Amount	Currency	Account (CAD)	Local (EUR)	Reporting (USD)	Item Type	Item Name	Note
B		2,806,207.00	CAD	2,806,207.00	2,038,403.57	2,753,883.22	Balance Check		
B		68,999,353.98	USD	70,310,341.71	51,072,800.87	68,999,353.98	Balance Check		
B		1,074,717.57	EUR	1,479,530.36	1,074,717.57	1,451,943.44	Balance Check		

**Goto B-Chk:** When selected the Base Input Child Import Workflow loads in a separate tab.

## Reports, Audit Packages, and Reference Documents


**NOTE:** Reports will automatically change to legal landscape format if needed to fit the columns.

**Reports:** Runs a standard or translated reconciliation or reconciliation history report. See information on the limitations of translated reports under [Global Options](#).

## Account Reconciliations

---

- *Single Currency Reconciliations:* You can run reports for local or translated currency.
  1. From **Report Type** select **Reconciliation** or **History**.
  2. From **Currency Level** select **Local** or **Translated to Reporting**.

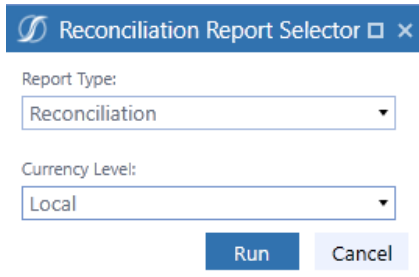


Reconciliation Report Selector □ ×

Report Type:  
Reconciliation ▼

Currency Level:  
Local ▼

Run Cancel

- *Multi-currency Reconciliations:* You can run reports for any or all currency levels for the reconciliation.
  1. From **Report Type** select **Reconciliation** or **History**.
  2. From **Currency Level** select **All**, **Account**, **Local**, or **Reporting**.

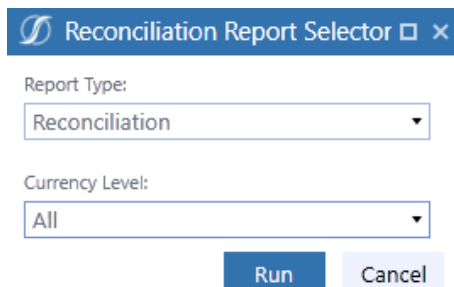


Reconciliation Report Selector □ ×

Report Type:  
Reconciliation ▼

Currency Level:  
All ▼

Run Cancel

**Audit:** Creates the audit package for one or more selected reconciliations, including a reconciliation report and related file attachments.

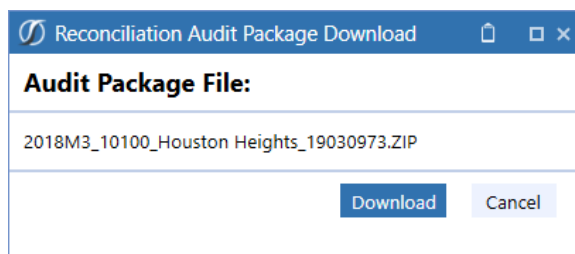

Reconciliation Audit Package Download □ □ ×

**Audit Package File:**


2018M3\_10100\_Houston Heights\_19030973.ZIP

Download Cancel

## Account Reconciliations

---

The audit package is stored in the OneStream File Share under the current user's personal folder in a subfolder named Recon Audit Packages:

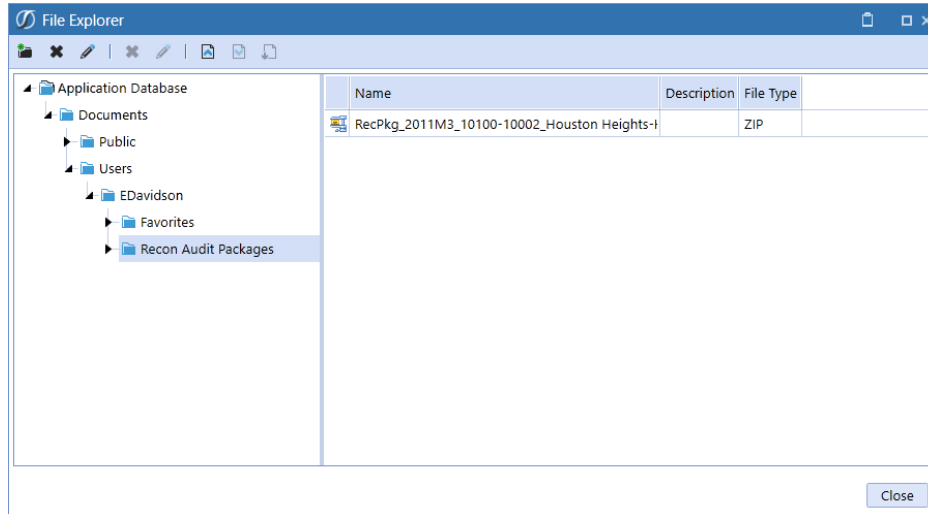

**NOTE:** If files with duplicate names exist, a timestamp field is added to supporting doc file names to ensure uniqueness.

**Ref Doc:** Displays only if the reconciliation has an attached reference document. Opens the reference document related to this reconciliation definition. This document typically contains instructions on how to complete this reconciliation.

## Reconciliation Support

In the Reconciliation Support area, you can view or upload related documents for the selected reconciliation or individual reconciliation detail item. If you upload a document with the same name, you have the option to overwrite the existing attached document.

Documents are denoted by:

- T for T-Doc
- S for S-Doc
- R for R-Doc
- I for I-Doc

## Account Reconciliations

---

**R-Doc:** Upload a document associated with the entire reconciliation, not necessarily one detail line item.

**I-Doc:** Upload a document associated with the selected detail line item. You can only upload I-Docs to reconciliations that are In Process. Not supported for items imported by a template.

**NOTE:** To attach an I-Doc, you must select a reconciliation detail item.

**View:** Opens the selected document.

**Delete:** Deletes the selected document.

If the Allow Approver Attachments option is selected in the Global Options tab, any user assigned to the Approver role or above can add I-Doc and R-Doc attachments after a reconciliation is prepared. See below for which documents the approver can add or delete depending on the state of the reconciliation.

Action	In Process	Prepared	Partially Approve	Fully Approved
Add I-Docs or R-Docs	Yes	Yes	Yes	No
Delete I-Docs or R-Docs added before preparation (by anyone)	Yes	No	No	No
Delete I-Docs or R-Docs added after preparation (by anyone)	N/A	Yes	Yes	No

## Attributes

Any user can view reconciliation attributes. The Local Admin assigned to the reconciliation, OneStream Admin, or the RCM Admin can edit attributes.

## Comments

Use this section to make additional comments on a reconciliation. The grid displays the comment, user, and timestamp of each entry. The icon displays in green if comments already exist. These comments print on reconciliation reports but are not included in the audit export file.

## Account Reconciliations

---

**TIP:** Comments can be set to Internal Only. Internal Only comments are not visible to auditors and do not display on reports. Comment visibility can only be updated by OneStream administrators, Reconciliation Global administrators, or the user who added the comment.


**NOTE:** Users with the RCM Auditor role can add comments to fully approved reconciliations. Users with the RCM Viewer role have access to view entered comments but cannot add comments. All other roles can add comments.

## History

Displays reconciliation approval and document history.

### State History

The history updates when the state of the reconciliation is changed by a user or the system.

State History 				
Action	State	Detail	User	Time Stamp (UTC)
Approved	Approved 1	Certified	CC	12/16/2020 12:29:38 AM
Prepared	Prepared	Certified	Frankfurt Controller	12/16/2020 12:20:21 AM

- **Action:** Tracked actions are: Prepared, Rejected, Recalled, Unapproved, Approved, and Balance Changed.
- **State:** State changes include In Process, Prepared, Rejected, Balance Changed, Auto Prepared, Partially Approved, Fully Approved, and Auto Approved.
- **Detail:** If an AutoRec rule was used to automate the preparation or approval of the reconciliation, the rule name is listed. Certification comments are also displayed.
- **User:** Name of the user who performed the action. State changes performed by the system include Auto Prepared, Auto Approved, and Balanced changed and display as "System".
- **Time Stamp:** Time that the action was taken.

### Document History

Lists all documents attached to the reconciliation including documents pulled forward. To download a document, select a row and then click **View**.

## Account Reconciliations

Document History						
Drag a column header and drop it here to group by that column						
Doc Type	WF Tir	Amount	File Name	Item Type	Item Name	
Stmt Balance	2022M3	1,943,892.34	BankStatementHoustonHeights-	Stmt Balance	Cash Balan	
Stmt Balance	2022M2	1,903,827.14	BankStatementHoustonHeights-	Stmt Balance	Cash Balan	
Stmt Balance	2018M3	1,943,892.34	BankStatementHoustonHeights.x	Stmt Balance	Cash Balan	
Stmt Balance	2018M2	1,903,827.14	BankStatementHoustonHeights.x	Stmt Balance	Cash Balan	

**NOTE:** S-Doc and T-Doc detail items display blank or 0.00 for the Amount, Item Type, Item Name, and Item Comment Note columns as they are not directly assigned to these items and can span across multiple reconciliations.

## Child Recs

Only visible if the reconciliation is from an account group and lists the reconciliation inventory items associated with the account group.

### Single Currency Solutions

Account Group Child Balances						
Drag a column header and drop it here to group by that column						
T.Account	S.Account	T.Entity	S.Entity	Tracking Detail	C.Local Bal.	Account Group
16000	12340	South Houston	South		323,173.87	GRPMachineryEquipment
16000	12360	Houston Heights	Heights		9,871,092.88	GRPMachineryEquipment
16000	12340	Houston Heights	Heights		215,449.25	GRPMachineryEquipment
16000	12360	South Houston	South		14,806,639.33	GRPMachineryEquipment


### Multi-currency Solutions

Account Group Child Balances																	
Drag a column header and drop it here to group by that column																	
T.Account	S.Account	T.Entity	S.Entity	Tracking Detail	C.Acct Bal.	C.Acct Cur.	G.Acct Bal.	G.Acct Cur.	C.Local Bal.	C.Local Cur.	G.Local Bal.	G.Local Cur.	C.Rpt Bal.	C.Rpt Cur.	G.Rpt Bal.	G.Rpt Cur.	Account Group
11000	11240	Montreal	68		930,691.26	CAD	651,484.08	USD	930,691.26	CAD	651,484.08	USD	651,484.08	USD	651,484.08	USD	GRPTIAR
11000	11111	Augusta	54		-427,785.00	USD	-427,785.00	USD	-427,785.00	USD	-427,785.00	USD	-427,785.00	USD	-427,785.00	USD	GRPTIAR
11000	11111	Carlsbad	42		-294,578.00	USD	-294,578.00	USD	-294,578.00	USD	-294,578.00	USD	-294,578.00	USD	-294,578.00	USD	GRPTIAR
11000	11240	Houston Heights	Heights		8,683,002.80	USD	8,683,002.80	USD	8,683,002.80	USD	8,683,002.80	USD	8,683,002.80	USD	8,683,002.80	USD	GRPTIAR
11000	11201	South Houston	South		2,762,131.26	USD	2,762,131.26	USD	2,762,131.26	USD	2,762,131.26	USD	2,762,131.26	USD	2,762,131.26	USD	GRPTIAR
11000	11200	Houston Heights	Heights		4,275,081.47	USD	4,275,081.47	USD	4,275,081.47	USD	4,275,081.47	USD	4,275,081.47	USD	4,275,081.47	USD	GRPTIAR
11000	11201	Frankfurt	FRANKFU		237,095.44	EUR	320,316.13	USD	237,095.44	EUR	320,316.13	USD	320,316.13	USD	320,316.13	USD	GRPTIAR
11000	11240	Quebec City	70		1,256,433.20	CAD	879,503.50	USD	1,256,433.20	CAD	879,503.50	USD	879,503.50	USD	879,503.50	USD	GRPTIAR
11000	11201	Montreal	68		263,439.38	CAD	184,407.62	USD	263,439.38	CAD	184,407.62	USD	184,407.62	USD	184,407.62	USD	GRPTIAR
11000	11240	South Houston	South		13,024,504.21	USD	13,024,504.21	USD	13,024,504.21	USD	13,024,504.21	USD	13,024,504.21	USD	13,024,504.21	USD	GRPTIAR
11000	11000	Carlsbad	42		14,436,643.00	USD	14,436,643.00	USD	14,436,643.00	USD	14,436,643.00	USD	14,436,643.00	USD	14,436,643.00	USD	GRPTIAR
11000	77300	Carlsbad	42		139,372.96	USD	139,372.96	USD	139,372.96	USD	139,372.96	USD	139,372.96	USD	139,372.96	USD	GRPTIAR
11000	11201	Houston Heights	Heights		1,841,420.84	USD	1,841,420.84	USD	1,841,420.84	USD	1,841,420.84	USD	1,841,420.84	USD	1,841,420.84	USD	GRPTIAR


### Preparer and Approver Actions

To perform status changes to reconciliations, select the checkbox next to the reconciliation and make changes to the bottom of the workspace.


If mass actions are enabled, you can select multiple reconciliations and apply a status change to the selected reconciliations. A summary dialog is displayed with explanations for any actions that were not successful.

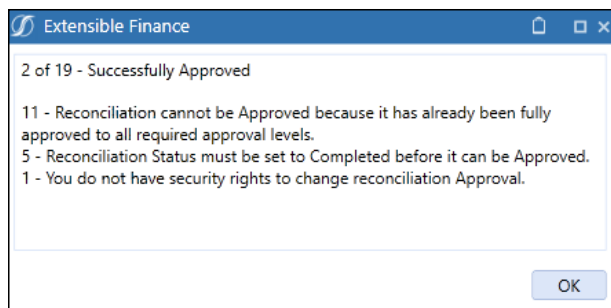


**NOTE:** Any comments or certifications apply to all marked reconciliations.

**Prepare** : Marks a reconciliation as prepared, but all necessary balances must first be explained.

**Recall** : Sets a prepared reconciliation back to *In Process*.

**Reject** : Approver status change. If the reconciliation is prepared, sets the status to *Rejected*. Auto-prepared reconciliations can be rejected by Approver 1-4/Approver 1-4 Backup or the RCM Admin. Fully Approved - auto reconciliations can only be rejected by the RCM Admin. If an auto-prepared or fully approved auto reconciliation is rejected, it returns to In Process and can be prepared again.

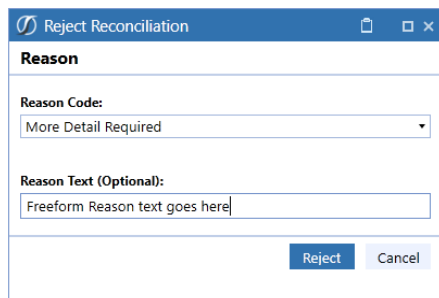

The screenshot shows a dialog box titled "Reject Reconciliation" with the following fields and buttons:

- Reason**
- Reason Code:** A dropdown menu with "More Detail Required" selected.
- Reason Text (Optional):** A text input field containing "Freeform Reason text goes here".
- Buttons:** "Reject" and "Cancel".

## Account Reconciliations

---

**Approve** ✓: If the reconciliation is prepared, sets the state to *Approved*. Due to segregation of duties, the user who approves the reconciliation cannot be the same user who prepared the reconciliation. There are no exceptions to segregation of duties. If there is more than one approval level, the approval level (for example, 1 of 3) updates after each approval.


Auto-prepared reconciliations can be approved by Approver 1-4/Approver 1-4 Backup or the RCM Admin.

**Unapprove** ↻: Removes one level of approval. If a reconciliation is manually unapproved, it goes back to Approved level one below the level it was previously approved. For example, if a reconciliation previously had 3 of 4 levels of approval completed and was unapproved by a level 3 approver, it would go to a state of Partially Approved 2 of 4.

Fully approved auto reconciliations can be rejected or unapproved only by the RCM Admin. If rejected, the fully approved reconciliation goes to In Process and can be prepared again. If unapproved, the fully approved reconciliation goes to Auto Prepared with no approvals complete (for example, 0 of 3) regardless of how many approval levels there are. The reconciliation can then resume the normal manual approval process.

This diagram describes the flow of a reconciliation through the different states:


# Account Reconciliations

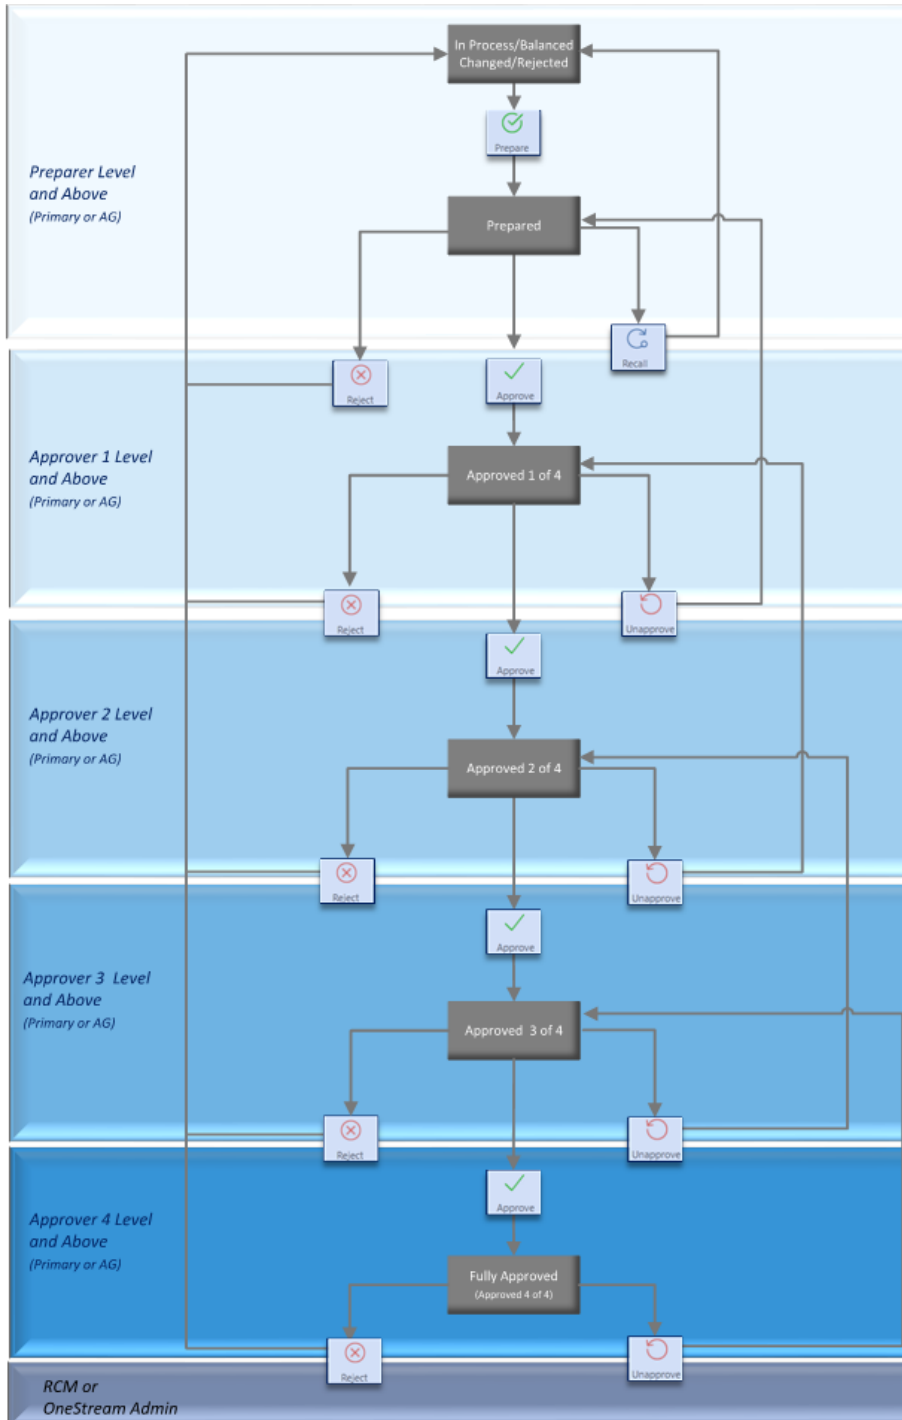


### Certification

If certification is required when preparing or approving a reconciliation, the certification dialog box displays. If you are preparing or approving multiple reconciliations, your certification comment applies to all selected reconciliations.

1. Enter a certification comment when preparing or approving a reconciliation. The comment may be required or optional.

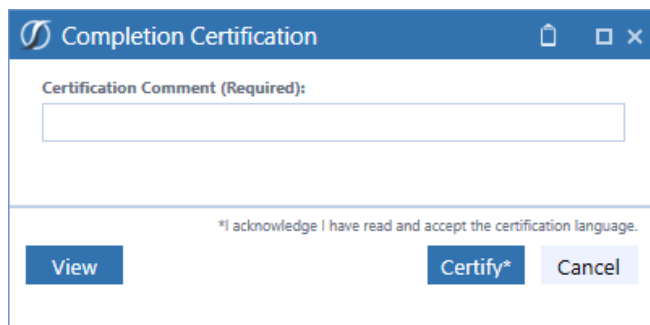

You can click **View** to display the certification text in a separate window.

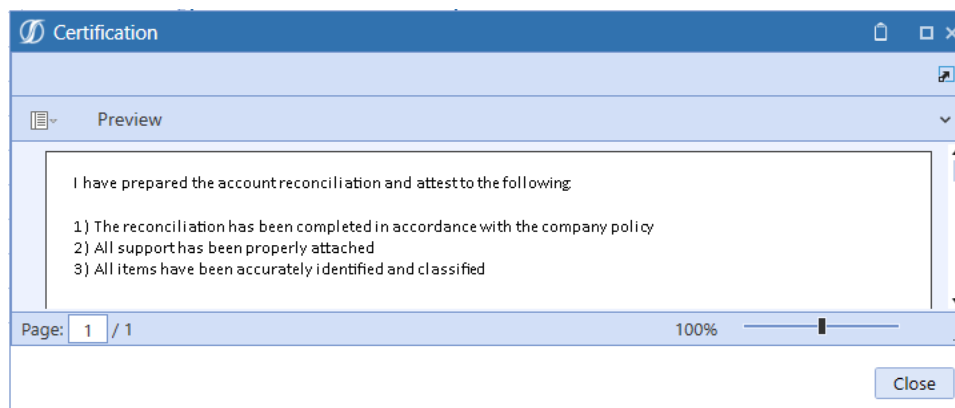

2. Click **Certify** to prepare the reconciliation.

### Reconciling and Changes to Account Groups

If an account group is being reconciled as opposed to a single reconciliation, the experience of adding explained items, attachments, completing, and approving is the same to the user. The only exception is the appearance of the *Child Recs* button on the screen, which shows the base reconciliations that are included in the account group.

## Account Reconciliations

Approval levels between Account Groups and the child reconciliations cannot be different. The child reconciliation inherits whatever number of approval levels assigned to the account group.

For example, see the *GRPAP Trade* Account Group:

Required	WF Profile	Recon Scenario	Account Group	T.Account (Filter/Drill)	S.Account (Display)	T.Entity (Filter/Drill)	S.Entity (Display)
<input checked="" type="checkbox"/>	Houston.Import	ActualAR	GRPAPTrade	20000 - Trade Accounts	GRP - AP Trade	Houston	Houston
<input checked="" type="checkbox"/>	Clubs	ActualAR	GRPICHousCarls	11200 - IC Receivables (	GRP - IC Houston_Carlsba	Clubs	Clubs
<input checked="" type="checkbox"/>	Clubs	ActualAR	GRPICHousMont	11200 - IC Receivables (	GRP - IC Houston_Montre	Clubs	Clubs
<input checked="" type="checkbox"/>	Clubs	ActualAR	GRPICSHousMont	11200 - IC Receivables (	GRP - IC SouthHouston_M	Clubs	Clubs
<input checked="" type="checkbox"/>	Houston.Import	ActualAR	GRPMachineryEquipm	16000 - Machinery & Eq	GRP - Machinery & Equip	Houston	Houston
<input checked="" type="checkbox"/>	Clubs	ActualAR	GRPTIAR	11000 - Trade Receivabl	GRP - Global AR	Clubs	Clubs

These are the reconciliations that belong to this account group.

Required	WF Profile	Recon Scenario	T.Account	S.Account	T.Entity	S.Entity	Account Group	Access Group	Approvals	Risk Level
<input checked="" type="checkbox"/>	Houston.Import	ActualAR	20000	21210	South Houston	South	GRPAPTrade	Houston	1	High
<input checked="" type="checkbox"/>	Houston.Import	ActualAR	20000	21220	Houston Heights	Heights	GRPAPTrade	Houston	1	High
<input checked="" type="checkbox"/>	Houston.Import	ActualAR	20000	21210	Houston Heights	Heights	GRPAPTrade	Houston	1	High
<input checked="" type="checkbox"/>	Houston.Import	ActualAR	20000	21220	South Houston	South	GRPAPTrade	Houston	1	High

## Reconciliation, Preparation and Approval of Account Groups

Whenever an account group is marked prepared or is approved at a certain level, the related child reconciliations are also marked that way. In the example above, here are some situations and their results when working with *AP Trade – Houston*:

- If marked complete, all four child reconciliations are marked complete in the underlying tables.
- This account group needs two levels of approval. If marked approved at level 1, the child reconciliations are marked approved at level 1.

## Account Reconciliations

---

- If marked approved at level 2 (the final approval level), the three child reconciliations that have approvals of 1 would be marked approved at level 1. The reconciliation that has approvals of 3 would be marked approved at level 3, the final approval level.
- If the account group is fully approved and then Unapprove is clicked, all child reconciliations would be set to Unapproved (level 0).

## Changes to Account Groups


Account groups and their related reconciliations can change over time. New reconciliations may be added and existing ones removed to be reconciled individually. Here are the effects of this.

- **Balance**
  - If a reconciliation inventory item starts out being reconciled individually and then is added to an account group, the prior reconciliation inventory item can be viewed in historical periods with its previous balance. The *Process* button pulls in balances and marks those balances internally as being for this reconciliation individually or as part of an account group.
  - If a reconciliation inventory item is part of an account group and is removed from the account group, it will retrieve its balance and the *Balance Changed* field will take the previous balance into account for this reconciliation inventory item.
  - If the items that add up to an account group change over time, the total balance amount previously stored for that account group will not change in historical periods if that account group is approved, even if *Process* is executed again in that period. The approved balance is essentially locked. If *Process* is executed again against an account group whose members have changed, the balance will be updated according to the current members of that account group.
  - If a new account group is created and existing reconciliations that had history are added, the account group will not show any activity from the prior month since the account group did not exist. It does not add the sum of the prior month's activity for the reconciliations in the account group. As such, the *Balance Changed* field will be the full amount of the balance and it will need to be explained.

## Account Reconciliations

---

- If an account group has all of its children removed, it is recommended to change that account group to be Auto Reconciled because from that point forward it will retrieve a zero balance. If that account group had child reconciliations in the past that were reconciled, it is not advised to clear the Required property on this account group in order for those historical reconciliations of the account group to be able to be audited. Note that in historical periods where this account group was fully approved, it will continue to appear in that way with the proper balance intact.
- Any new account group created after prior periods have been processed would show up in prior periods as not being completed yet.
- **Process Warning:** When a reconciliation account group is removed from a reconciliation in inventory a Process will need to be done by an Account Reconciliations Administrator or Application Administrator at the review-level workflow profile to ensure that all account groups and reconciliation balances are updated. When this occurs a warning icon will appear next to the Process button on the Workflow page. This warning icon will be removed for users after an Administrator processes the reconciliations and the workflow page is refreshed.



- **Approval Levels**

- *Removing Reconciliation Inventory Items from an Account Group:* For example, if the reconciliation inventory items in the AP Trade – Houston example above were removed from the account group that was not fully approved, the child reconciliations would show with their appropriate status. If the account group was fully processed, in historical periods it will not show the child reconciliation that was removed. These reconciliations would be processed and approved individually in future periods.

**NOTE:**

You cannot remove child reconciliations from an Account Group if it has been prepared for the current period. If child reconciliations are removed they maintain the account group's attributes and do not revert back to their former settings.

## Account Reconciliations


- *Adding Reconciliation Inventory Items to an Account Group:* Reconciliation inventory items added will now fall under the same approval behavior from that point forward as they would have if they had been there all along. Their historical approvals and related explained items would still be visible in those periods.

# Analysis and Reporting

Review and monitor exceptions and unresolved items with this standard set of dashboards and reports.

## Scorecard


The Scorecard is a dashboard that contains charts reflecting the current workflow period's reconciliation statuses by preparation, approval, due date, and unreconciled by entity.

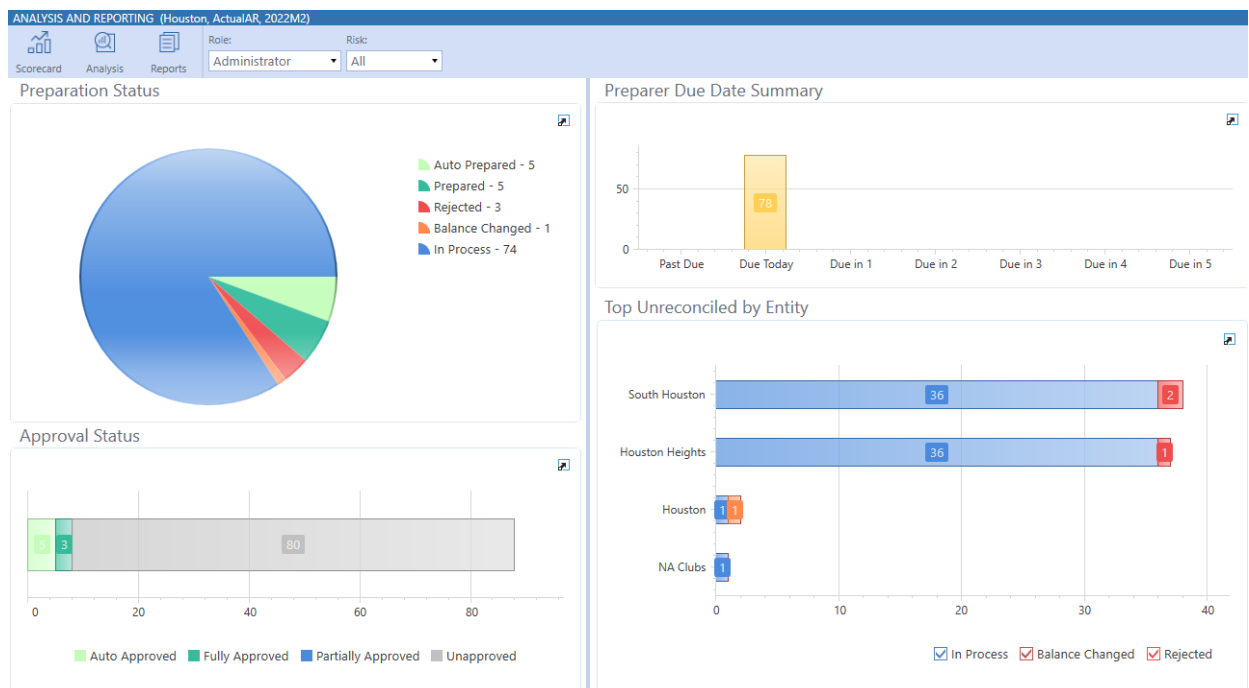

Selecting any data points in a chart will open-up a detailed drill down that can be exported for further analysis.

## Account Reconciliations

---

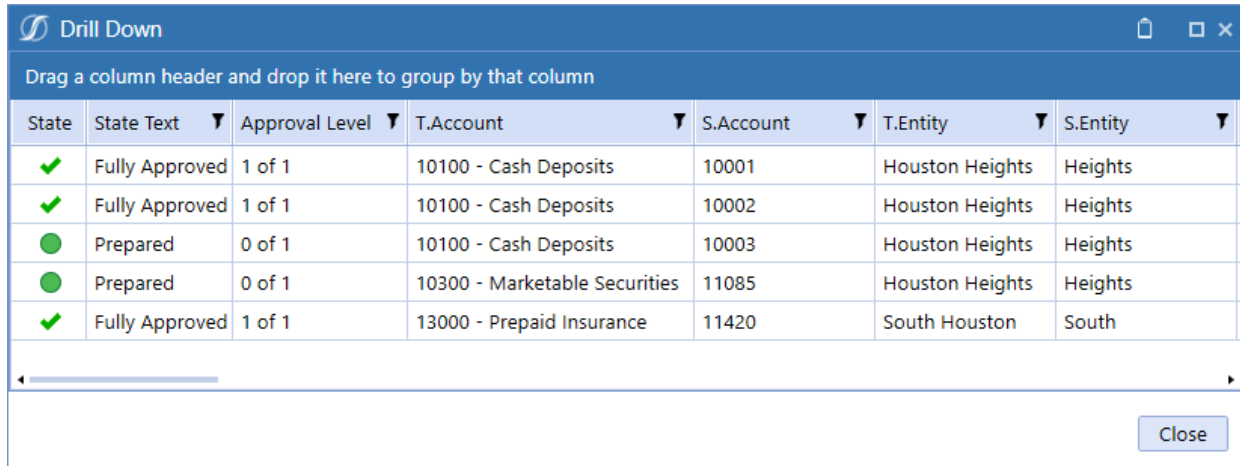

The image shows a 'Drill Down' dialog box with a table of account reconciliation data. The dialog has a title bar with a refresh icon and window controls. Below the title bar is a header area with the text 'Drag a column header and drop it here to group by that column'. The table has seven columns: State, State Text, Approval Level, T.Account, S.Account, T.Entity, and S.Entity. Each column has a dropdown arrow. The table contains five rows of data, each with a status icon (checkmark or circle) in the State column.

State	State Text	Approval Level	T.Account	S.Account	T.Entity	S.Entity
✓	Fully Approved	1 of 1	10100 - Cash Deposits	10001	Houston Heights	Heights
✓	Fully Approved	1 of 1	10100 - Cash Deposits	10002	Houston Heights	Heights
●	Prepared	0 of 1	10100 - Cash Deposits	10003	Houston Heights	Heights
●	Prepared	0 of 1	10300 - Marketable Securities	11085	Houston Heights	Heights
✓	Fully Approved	1 of 1	13000 - Prepaid Insurance	11420	South Houston	South


Close

## Analysis

### Reconciliation Exposure

The Reconciliation Exposure dashboard contains a Past Due Summary and charts reflecting past due Reconciliations by days, Unexplained Balances, and Entity. Like the Scorecard, selecting any data points in any chart opens a detailed drill down dialog you can export for further analysis.

## Account Reconciliations

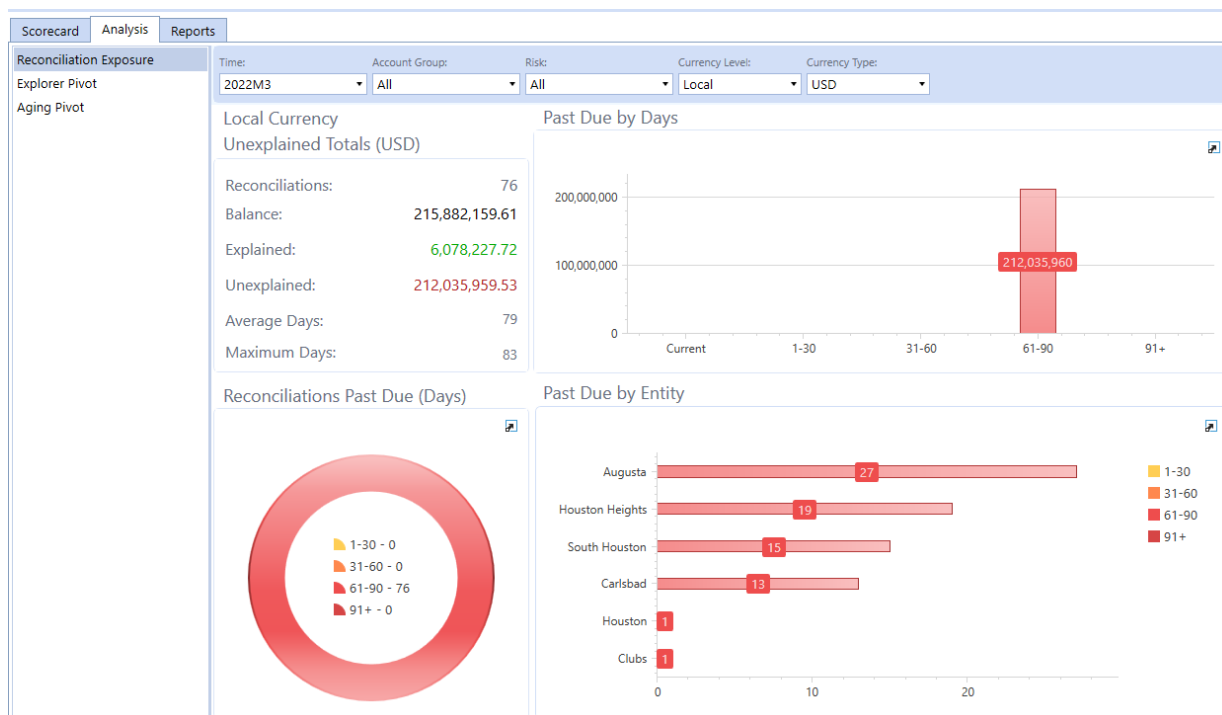

## Aging Pivot

Provides a view into the aging of reconciliation detail items. The ranges for the Aging column are derived from the Aging Periods control list. If no data exists for a range, then the column for that range does not display. You can export the grid to Excel by right-clicking on the header of the pivot.

Any detail item attribute can be added or removed from the rows and columns by clicking and dragging them from the Hidden Fields section. The default rows are Entity, Currency, and Account. The default column is Aging. The default Data Area is Item Amount.

# Account Reconciliations

Scorecard Analysis Reports

Reconciliation Exposure  
Explorer Pivot  
Aging Pivot

Time: 2022M3

2021M11  
2021M12  
2022M1  
2022M2  
2022M3  
2022M4  
2022M5  
2022M6

Filter Area Column...

AgingBucket

Row Area Data Area

EtT Currency Ac

ItemAmount

Defer Layout Update Upd

**Aging Pivot**

			0 - 30
Houston	USD	GRP - AP Trade	-16,963,223.91
	USD Total		-16,963,223.91
Houston Total			-16,963,223.91
Houston Heights	USD	11080	2,003,260.00
		11085	4,849,355.20
		11090	4,451,355.60
		11220	-40,963.05
		11225	-1,272,139.25
		11315	649,737.64
		11325	80,133.60
		11330	2,652,411.15
		11342	-420,000.00
		11420	52,161.60
11430	397,133.20		
12300	26,136,177.60		
12310	8,853,456.80		

# Reports

ACCOUNT RECONCILIATIONS

ANALYSIS AND REPORTING (Clubs, ActualAR, 2018M3)

Admin As Admin

Scorecard Analysis Reports

Reconciliation Status  
Reconciliation Detail  
Reconciliation by Preparer  
Reconciliation Risk Analysis  
Reconciling Item Analysis  
Reconciling Item Aging  
Reconciliation Access Groups

Time: 2018M2 Status: All Approval: All Currency Level: Local

Reconciliation Status

Navigation

Document Map Pages Search Results

- Document
  - Approved
  - Completed
  - AutoRec
  - Unapproved
  - Completed
  - Inprocess

Reconciliation Status

Source Scenario: Actual  
Reconciliation Scenario: ActualAR  
Currency Level: Local  
Time: 2018M2

OS Account	GL Account	OS Entity	GL Entity	Balance	Currency	Explained Balance	Unexplained Balance	Activity
Completed, CC, 6/16/2020 12:13:34 PM	11080	Frankfurt	FRANKFU	793.80	EUR	793.80	0.00	16.20
Completed, HC, 3/8/2018 12:15:33 PM	11080	Houston Heights	Heights	1,963,194.00	USD	1,963,194.00	0.00	40,065.20
Completed, HC, 3/8/2018 9:08:50 PM	11080	South Houston	South	2,944,792.20	USD	2,944,792.20	0.00	60,097.80
Completed, Frankfurt Controller, 6/16/2020 3:06:24 PM	10100	Frankfurt	FRANKFU	302,372.77	EUR	302,372.77	0.00	6,170.87
Completed, HC, 12/28/2018 1:31:33 AM	10100	Houston Heights	Heights	27,458,481.56	USD	27,458,481.56	0.00	560,397.58
Completed, HC, 4/3/2018 3:52:52 PM	10100	Houston Heights	Heights	3,548,475.73	USD	3,548,475.73	0.00	72,417.87

Page: 1 / 14

## Account Reconciliations

---

**Reconciliation Status:** Reconciliations by status with Account, Entity and balance information.

**Reconciliation Detail:** Detailed Reconciliations with status information and other *Explanation* detail.

**Reconciliation by Preparer:** Same as above but grouped by Preparer.

**Reconciliation Risk Analysis:** Reconciliation items by Risk Level with Account, Entity and balance information.

**Reconciling Item Analysis:** Reconciliation items by Reconciliation Item Type with Account, Entity and balance information.

**Reconciliation Item Aging:** Reconciliation items aged by period originally booked.

**Reconciliation Access Groups:** List of Security Access Groups and users assigned to each if the user running this report is a OneStream Administrator or Reconciliations Global Admin. Note that if a Local Admin runs this report, this listing will be limited to only show Access Groups to which this user manages. If any other user runs this report, the report's contents will be empty.

## DynamicCalc UD8 Accounts

This dimension and these UD8 members are provided to convey Reconciliation status. They are designed to be assigned as columns on a Cube View and will run their logic against every row (*typically Accounts*).

These run extensive Business Rule logic, so if they are run across a lengthy list of Accounts, it may take some time to open this report. Also, they can run against a Review-level Workflow Profile which will aggregate all of the Entity data that falls under all of the Base Input Workflow Profiles that are descendants of this Review level. If that results in numerous Entities being aggregated, then this could also result in some wait time for that Cube View to render its results. Note that this aggregation of Local currency values that are not translated, so if the Entities that fall under the related Review level Workflow Profile are of mixed currencies, the aggregated amounts may be of little value to the reader of that report.

## Examples of Reports with UD8 Dynamic Calcs and with Navigation Links for Drilling

The *GolfStream\_v37* reference application, available on the MarketPlace, has examples of the types of reports that can be built to take advantage of the included UD8 members and also has an example of using Navigation Links to drill from a financial report to its related Reconciliation details.

## Account Reconciliations

2011M3		Reconciliation Statistics Origin: Import (GL Import)					Local
	Assets	Liabilities	Equity	Recon % Comp	IS Correction	BS Correction	
Montreal	3,033,049	9,646,583	-6,613,533	0	0	0	
Quebec City	4,094,617	13,022,887	-8,928,270	0	0	0	
Augusta	47,397,096	36,339,019	11,058,078	0	0	0	
Carlsbad	40,585,020	28,664,365	11,920,655	0	0	0	
Houston Heights	107,046,455	68,344,954	38,701,500	3	3,000	0	
South Houston	160,566,682	128,321,738	32,244,944	2	0	4,890	

The example shown below has a Navigation Link which launches a related Report to drill into Reconciliation details:

2011M3		Houston Reconciliation Statistics Origin: Import (GL Import)					Local
	Imported TB	Recon % Comp	IS Correction	BS Correction	Manual Entry	Top Side JV	
Petty Cash	5,008,150	100	3,000	4,890			
Cash Deposits	89,700,483	0	0	0			
Marketable Securities	12,123,388	0	0	0			
Restricted Cash	11,128,389	0	0	0			
<b>Total Cash</b>	<b>117,960,410</b>	<b>0</b>	<b>0</b>	<b>0</b>			
Trade Receivables	36,998,763	0	0	0			

Here is the drilled report:

## Account Reconciliations

The screenshot displays the 'Reconciliation Report (Local)' window. On the left is a 'Navigation' pane with a search bar and a 'Document Map' showing a tree structure with 'Document' expanded to 'Completed' and '10000 - Petty Cash [11080, ...]'. The main area is titled 'Reconciliation' and shows details for '10000 - Petty Cash'. At the top right, it indicates 'Reconciliation Scenario: ActualAR', 'Time: 2018M3', 'Currency Level: Local', and 'Currency Type: USD'. Below this, a table lists 'GL Account: 11080', 'OneStream Entity: Houston Heights', and 'GL Entity: Heights'. A summary row shows 'Risk Level: Low', 'Proper Sign: OK', 'Due Date: 06/11/2020', 'Days Until Due: 0', and 'Days Past Due: 0'. A box contains balance information: 'Balance: 2,003,260.00', 'Explained: 2,003,260.00', 'Unexplained: 0.00', and 'Activity: 40,065.20'. Another box shows 'Status: Completed', 'Status By: HC', and 'Status Date: 3/8/2020 10:17:11 PM'. A third box shows 'Approval: Approved', 'Approval Level: 1 of 1', 'Approval By: CC', and 'Approval Date: 3/8/2020 11:21:59 PM'. Below these is an 'Item Type' table with columns for 'Item Name', 'Item Note', and 'Item Amount'. The items listed are 'Correction (S) Reclass Adjustment' (59,367.66), 'Strmt Balance Cash Balance Chase' (1,943,892.34), and an 'Item Total' of 2,003,260.00. At the bottom, there is a 'Sign-Off History' table with columns for 'State', 'Approval Level', 'Reason', 'Detail', 'User', and 'Time Stamp (UTC)'. The history shows 'Approved' (Level 1, User CC, 3/8/2018 11:21:59 PM) and 'Completed' (Level 0, User HC, 3/8/2018 10:17:11 PM). A 'Commentary' section is also present with columns for 'Comment', 'User', and 'Time Stamp (UTC)'. The interface includes a 'Page: 1 / 1' indicator, a 100% zoom level, and a 'Close' button.

## Multi-Currency Calculation Examples

The Account Reconciliations solution performs translation calculations automatically within the system. The following examples demonstrate how the calculations are performed.

### Data Loaded into Stage

Account Reconciliations requires that at a minimum, Local balances are loaded into Stage. If Account and/or Reporting balances are not loaded, OneStream will automatically translate the Local balances to the respective levels using the FX Rate Type selected within Global Options.

1. **Load FX Rates** for the current reconciling period using the **FX Rate Type** that was selected within the **Account Reconciliation Global Options**. For this example, the rates being used are as follows:

## Account Reconciliations

FX Rates				
	EUR	CAD	USD	GBP
EUR		1.52	1.09	0.88
CAD	0.66		0.71	0.58
USD	0.92	1.40		0.81
GBP	1.14	1.74	1.24	

Note that the rates in the upper right, which are shown in grey, are included for clarification purposes only. OneStream calculates inverse rates.

2. **Load** Trial Balance data into Stage. Note that balances may be loaded at different levels, for different Source Accounts. The one exception being that Local balances must always be loaded.

Balances Loaded						
Account #	Account		Local		Reporting	
1001	-	EUR	10,000.00	EUR	-	USD
1002	9,000.00	GBP	10,000.00	EUR	-	USD
1003	15,000.00	CAD	10,000.00	EUR	11,000.00	USD
1004	-	CAD	10,000.00	EUR	11,000.00	USD

3. OneStream will automatically translate the Account and Reporting level balances for Source Accounts loaded that do not load these level balances. Balances that are loaded, will hold and supersede any further translation.

Calculated Reconciliation Balances						
Account #	Account Amount		Local		Reporting Amount	
1001	10,000.00	EUR	10,000.00	EUR	10,900.00	USD
1002	9,000.00	GBP	10,000.00	EUR	10,900.00	USD
1003	15,000.00	CAD	10,000.00	EUR	11,000.00	USD
1004	15,200.00	CAD	10,000.00	EUR	11,000.00	USD

- 10,000 EUR \* 1.00 = 10,000 EUR
- 10,000 GBP \* 1.09 = 10,900 CAD
- 10,000 EUR \* 1.52 = 15,200 CAD
- Note that the loaded balances remain and that variances exist between translated values, even when the currency types are the same.

## Multi-Currency Account Groups

For the Source Accounts that were loaded, assume a single Account Group is desired to reconcile all cash balances in one reconciliation. First, the Account Group is created, and the Account and Local currency types are selected as part of that creation. For this example, The Account Group Account currency is CAD and the Account Group Local currency is GBP.

- Using the same FX rates listed above, OneStream will automatically translate the Child (i.e. Source) currency balances to the Group currency balances.
- The translated balances are then aggregated for each currency level and are the reconciling balances for the Account Group.

	①				①				①							
	C. Acct		G. Acct		C. Local		G. Local		C. Reporting		G. Reporting					
1001	a	10,000.00	EUR	15,200.00	CAD	e	10,000.00	EUR	8,800.00	GBP	f	10,900.00	USD	10,900.00	USD	
1002	b	9,000.00	GBP	15,660.00	CAD		10,000.00	EUR	8,800.00	GBP		10,900.00	USD	10,900.00	USD	
1003	c	15,000.00	CAD	15,000.00	CAD		10,000.00	EUR	8,800.00	GBP	g	11,000.00	USD	11,000.00	USD	
1004	d	15,200.00	CAD	15,200.00	CAD		10,000.00	EUR	8,800.00	GBP		11,000.00	USD	11,000.00	USD	
				②	61,060.00	CAD			②	35,200.00	GBP			②	43,800.00	USD

- $10,000 \text{ EUR} * 1.52 = 15,200 \text{ CAD}^{**}$
- $9,000 \text{ GBP} * 1.74 = 15,660 \text{ CAD}$
- $15,000 \text{ CAD} * 1.00 = 15,000 \text{ CAD}$
- $15,200 \text{ CAD} * 1.00 = 15,200 \text{ CAD}$
- $10,000 \text{ EUR} * 0.88 = 8,800 \text{ GBP}^{**}$
- $10,900 \text{ USD} * 1.00 = 10,900 \text{ USD}$
- $11,000 \text{ USD} * 1.00 = 11,000 \text{ USD}$

\*\*These examples reflect the use of OneStream calculated inverse rates and is for clarification purposes only.

# Transaction Matching

See these topics:

- [Settings](#)
- [Match Set Administration](#)
- [Matches](#)
- [Transactions](#)
- [Scorecard](#)
- [Data Splitting](#)

## Settings




The **Settings** page contains the Global Options in which key properties that guide administration are set as well as Access Control, Match Sets, and Uninstall options.

## Global Options

**Global Options** contains key properties that guide global Transaction Matching administration and is used for the initial setup and configuration of Transaction Matching.

**NOTE:** All global option settings are retained during solution upgrades.

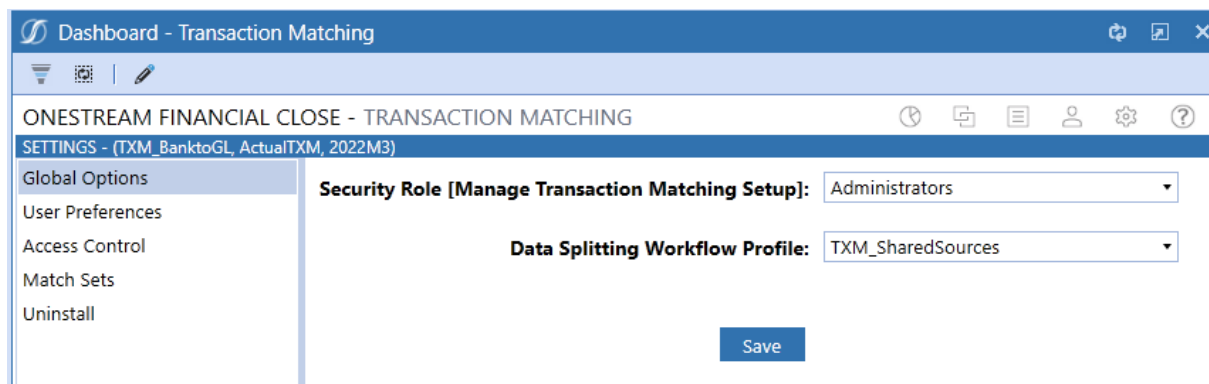

### Security Role

Security is governed at the global level. The user group assigned to the Security Role determines who will be the Transaction Matching Administrators. Users in this group have access to all areas of Transaction Matching and are the only users who can see the Settings Page icon.

See [Options](#).

**IMPORTANT:** If Data Security is enabled, Transaction Matching Administrators will only be able to see transactions for which they have access, based on the Data Set Security.

### Assign User Group to Security Role

Click **Global Options**, select the user group from the drop-down list (the default value is Administrators), and click **Save**.

### Data Splitting Workflow Profile

The *Data Splitting Workflow Profile* is the Base Input Parent created if data splitting is needed.

See [Data Splitting Setup](#) for complete setup details.

### Assign Data Splitting Workflow Profile

Click **Global Options**, select the workflow profile from the drop-down list, and click **Save**.

### User Preferences

All users can set preferences for the Start page and the layout of the data sets on the Transactions page.

1. On the **Settings** page, click **User Preferences**.
2. In the drop-down menus, select the options.
  - **Start Page:** The default option is **Scorecard**. You can change it to **Matches** or **Transactions**.

## Transaction Matching

---

- **Transactions Page Layout:** The default option is **Horizontal**. You can change it to **Vertical**.

3. Click **Save**.

4. Click **OK**.

## Access Control

An Access Group is a list of users and their respective roles that are created by OneStream Administrators or Transaction Matching Administrators.

Access Groups can be set up to support the concept of backup resources for a role when the designated user cannot perform the duties. It can contain many users for each Role. For instance, an Access Group may contain more than one User for the Role of Preparer. By adding more than one User per Role in this way, the main person's backup is already granted access.

Another way that backups are built in is by a person in a superior role can act in place of a person in a lessor role for a given period. For instance, if a user in a Preparer Role is on vacation, an Approver can act as a Preparer, but someone else must approve the match due to Segregation of Duties.

**NOTE:** Access Groups are used only by the Transaction Matching solution and are different than User Groups used in other parts of OneStream.

See also: "Segregation of Duties" on page 143

Role	Duties
Viewer	Read-only access to: <ul style="list-style-type: none"><li>• View transactions</li><li>• View matches</li><li>• View scorecard</li></ul>
Commenter	Same as Viewer and: <ul style="list-style-type: none"><li>• Add comments to matches and transactions</li></ul>
Preparer	Same as Commenter and:


## Transaction Matching

---

Role	Duties
	<ul style="list-style-type: none"><li>• Add attachments to matches and transactions</li><li>• Create manual matches</li><li>• Accept suggested matches</li><li>• Process match set rules</li></ul>
Approver	Same as Preparer and: <ul style="list-style-type: none"><li>• Approve and unapprove suggested and manual matches</li></ul>
Local Admin	Same as Approver and: <ul style="list-style-type: none"><li>• Access Match Set Administration<ul style="list-style-type: none"><li>◦ Create and manage rules</li><li>◦ Create and edit data sets and data set fields</li><li>◦ Create and edit rule sets</li><li>◦ Create and edit reason codes</li><li>◦ Add, remove, and edit user access to match sets</li><li>◦ Delete transactions</li><li>◦ Remove deleted transactions</li></ul></li></ul>

### Add Access Group

1. On the **Settings** page, click **Access Control**.
2. In the **Access Groups** pane, click **Insert Row** and then click in the fields to add a **Name** and **Description** for the group. It is recommended to use a common naming convention since there could be many of these. Whatever standard is set by your project team, it is recommended to document the naming conventions so that it can be followed by all administrators.
3. Click **Save**.

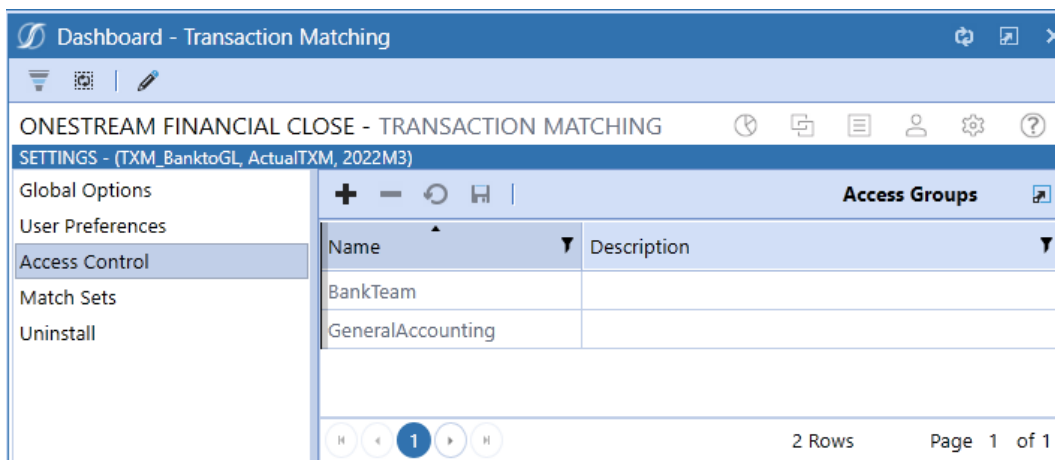

### Add Members to Access Group

1. On the **Settings** page, click **Access Control**.
2. Click the name of the Access Group you want to modify.
3. In the Members pane, click **Insert Row**.
4. Click the **User** cell and select a name from the drop-down list. You can only add a user to an Access Group once for each Role.
5. When a new row is inserted, the **Role** defaults to **Preparer**. Change this setting by clicking the **Role** cell and select the new role from the drop-down list.
6. Click **Save**.

## Transaction Matching

Name	Description
BankTeam	All members of bank team
GeneralAccounting	

User	Role
OFC_User	Preparer
Administrator	Approver

## Match Sets

The **Match Sets** list displays all match sets and their respective Access Group, identified by a Workflow Profile and Scenario.

Workflow Profile	Scenario	Access Group	Match Set ID
TXM_BanktoGL	ActualTXM	BankTeam	6afd2896-c2a2-499d-9742-f8c530500c95
TXM_Suspense	ActualTXM	GeneralAccounting	906e95d2-4b2d-4ce4-b321-ede3ae5243b5
TXM_ICMatch	ActualTXM	GeneralAccounting	f3b8d913-2cdb-4499-a3cb-e953dd35e331

## Create Match Set

1. On the **Settings** page, click **Match Sets**.
2. Click **Insert Row**.
  - Double-click the **Workflow Profile** cell and select a Workflow Profile.
  - Double-click the **Scenario** cell and select a Scenario.
  - Double-click the **Access Group** cell and select an Access Group to assign to the Match Set.

## Transaction Matching

---

- Do not make any changes to the **Match Set ID**. Any text entered is reverted to a system generated GUID.
3. Click **Save**.

**NOTE:** Match Sets must contain unique Workflow Profiles and Scenarios.

## Copy Match Set to New or Same Scenario

1. On the **Settings** page, click **Match Sets**.
2. Select the Match Set you want to copy.
3. Click **Copy**.
4. In the Copy Match Set dialog box, select the scenario you want to use from the drop-down list and click **Copy**.

**IMPORTANT:** When copying a Match Set in the same scenario, it is recommended that all data set fields match.

## Delete Match Set

1. On the **Settings** page, click **Match Sets**.
2. Select the Match Set you want to delete.
3. Click **Delete**.
4. Click **OK**.

**IMPORTANT:** Only Match Sets without transactions or matches can be deleted.

## Uninstall

The Uninstall feature allows you to uninstall the user interface or the entire solution. If performed as part of an upgrade, any modifications that were made to standard solution objects are removed.

## Transaction Matching

---

**IMPORTANT:** The Uninstall option uninstalls all solutions integrated in OneStream Financial Close.

The uninstall options are:

1. **Uninstall UI - OneStream Financial Close** removes all solutions integrated into OneStream Financial Close, including related dashboards and business rules but leaves the databases and related tables.

**IMPORTANT:** This procedure resets the Workspace Dashboard Name to (Unassigned). An Administrator must manually reassign the Workspace Dashboard Name after performing an Uninstall UI.

2. **Uninstall Full - OneStream Financial Close** removes all the related data tables, data, dashboards, and business rules from all solutions integrated into OneStream Financial Close. Select this option to completely remove the solutions or to perform an upgrade that is so significant in its changes to the data tables that this method is required.

**CAUTION:** Uninstall procedures are irreversible.

## Load Transaction Data

After Transaction Matching is set up, one of the first steps is to create the data set. In order to do this, the data source must be identified.

Data loading leverages the OneStream Data Integration Functionality (Flat File or Direct Connect) into Stage. During import, the data transfers into Stage and then to the linked Match Set Data Set; assigning it a transaction number.

You can leverage a single file with all transactions and then split the data in Transaction Matching to the applicable Match Set Data Sets. Organizations can also import multiple data source formats (i.e. disparate GLs) and stack the transactions in a single Data Set creating a single source. Data can be imported Daily, Weekly, Monthly, etc.

Once the base input import is set up, data can be loaded to it before it is assigned to a transaction matching data set. This occurs only in stage and will not be copied into Transaction Matching until it is linked to a data set. In order to reduce the volume of data maintained in OneStream, once data is loaded into the Transaction Matching tables it is cleared from Stage.

**TIP:** The first row of data imported will remain in Stage in order to identify the sources imported into Transaction Matching.

See *Integration* in the *Design and Reference Guide*.

# Match Set Administration



**Match Set Administration** contains the Match Set Rules, Data Sets, Options and Access Groups.

Match Set Administration contains the areas a user requires to manage the match sets by implementing and refining the settings in order to automate as much of the matching activities as possible. Match Set Administration is only accessible to Transaction Matching Administrators and Match Set Local Administrators.

## Data Sets



The **Data Sets** page displays the available data sets for the current match set and provides the ability to create new ones.

A Data Set is the transactional data used for matching. A Data Set may contain one or many Data Sources. Each data set may contain the following fields:

Data Sets			
Name	Description	Sequence	Data Security
Payables Ledger		1	Entity OR IC
Receivables Ledger		2	Entity OR IC

Field	Description
Name	The name of the data set.
Description	The description of the data set.
Sequence	The sequence (order) of the data set (1,2,3) to be used for display on the Matches and Manual Matches pages. The first data set (DS1) is the primary data set used to compare against the remaining data sets.

## Transaction Matching

Field	Description
Data Security	Security level of the data set (Entity, IC, Entity OR IC, or Entity AND IC) based on members in the <b>Read and Write Data Group</b> or <b>Read and Write Data Group 2</b> in the Security section of <b>Member Properties</b> on the OneStream Entity.

The screenshot displays the 'Member Properties' configuration window. On the left, a tree view shows the hierarchy: Members > Hierarchy > All Orgs > Total GolfStream > Clubs > US Clubs > Augusta. The right pane is divided into 'Member Properties' and 'Relationship Properties'. The 'Member Properties' section includes:

- General:** Dimension Type (Entity Dimension Type), Dimension (CorpEntities Dimension), Member Dimension (CorpEntities Dimension), Name (Augusta), Default Description.
- Security:**
  - Display Member Group: Everyone
  - Read Data Group: Augusta
  - Read Data Group 2: Nobody
  - Read and Write Data Group: Everyone
  - Read and Write Data Group 2: Nobody
  - Use Cube Data Access Security: False
  - Cube Data Cell Access Categories
  - Cube Conditional Input Categories
  - Cube Data Management Access Categories
- Settings:** Currency (USD), Is Consolidated (True), Is IC Entity (False).
- Vary By Cube Type**

**IMPORTANT:** Assign the primary data sequence to position 1; match variances are calculated by comparing all subsequent data sets to the primary.

## Create a Data Set

1. On the **Match Set Administration** page, click **Data Sets**.
2. Click **Insert Row** and then double-click in the following cells to enter information:

## Transaction Matching

---

- **Name:** Enter a display name to identify the data set.
- **Description:** Enter additional information you want to display to further identify the data set.
- **Sequence:** Enter the number indicating the order you want the data set displayed.
- **Data Security (Optional):** Select the security type you want to assign to the data set from the drop-down list or leave the default (Not Enabled) to display everything. This column is visible only when the Data Security option is enabled for the Match Set.

3. Click **Save**.

**NOTE:** Although the Transaction Matching Administrators user group has the access necessary to manage the solution, if Data Security is enabled, the ability to view transactions is dependent upon the individual user's Entity level security. Users are only able to see transactions for the entities to which they have Read and Write access.

## Data Set Fields

Each data set holds up to 47 fields identified by a predetermined field name. Although 50 fields are available, only 47 fields are displayed in the Transaction Matching grid view. Three of the 50 fields are used to display the Transaction ID, Transaction Number, and Comment/Attachment identification.

- **16 Cube Dimensions:** Entity, Account, Scenario, Flow, Time, IC, UD1-8, Label, SourceID, TextValue, WF Profile, WF Scenario, WF Time, and Status WF Time.
- **16 Text Fields:** Attribute Fields 1-16
- **4 Date Fields:** Attribute Fields 17-20
- **13 Value Fields:** Amount and Attribute Value Fields 1-12

Each piece of data contains the following descriptors:

Field	Description
Name	Drop-down list containing the available fields.

## Transaction Matching

Field	Description
	<p><b>NOTE:</b> If integrating Transaction Matching with Account Reconciliations, you must include all Tracking Levels used for Account Reconciliations in your Data Set Name field. See <a href="#">Preparing External Files</a>.</p>
Alias	Freeform text field that describes the friendly name intended to further identify the data in a field.
Column Order	Allows users to see the data/information in a specific order on both Matched and Transactions pages.
Display Format	<p>Formats that numerical values display such as dates, amounts, and decimals throughout the solution, for example:</p> <ul style="list-style-type: none"> <li>• <b>N0</b> will not show any decimals or zeroes.</li> <li>• <b>N1-N6</b> shows X number of decimals (N2 shows two decimals, N5 shows five decimals, etc.)</li> <li>• <b>#,###,0%</b> displays 10,000% and -10,000%</li> <li>• <b>#,###,0.00</b> displays 10,000.00 and -10,000.00</li> </ul> <p>See <i>Application Properties</i> in the <i>Design and Reference Guide</i> for the complete listing of number formats.</p>
Summary 1/2/3	<p>Amount or Attribute Value fields displayed on transactions and match grid pages that are used to cross-reference and total up to three value fields to verify that the values are in balance.</p> <p><b>NOTE:</b> Summary fields can only be changed before matches exist in a match set.</p>

### Import Workflows

1. On the **Match Set Administration** page, click **Data Sets**.
2. Click the data set you want to import into.
3. In the <Data Set name> **Import Workflows** pane click **Insert Row** and then click the new row.
4. Select a base import workflow from the drop-down list.
5. Click **Save**.

**NOTE:** If multiple import workflows are added, they will be sequentially stacked together into a single data set.

### Match Set Rules



The **Match Set Rules** page displays rules created for the current match set and provides the ability to create new ones.

*Match Set Rules* contains the logic that data runs through to determine rules-based matches. There is no limit to the number of rules that can be created. The Rules list displays the following information for each Rule:

- **Name:** Freeform text field to give rule a short name
- **Type:** Drop-down list containing the rule types.
- **Match Type:** Drop-down list containing the match types.
- **Description:** Optional freeform text field containing additional rule information.
- **Reason Code:** Field displaying the information established during reason code setup.
- **Active:** Indicates if the rule should be run during Rule processing (on/off toggle).
- **Process Sequence:** The order in which the rules are run. Rules are run in ascending order of the process sequence.

## Transaction Matching

---

Rules						
Name	Type	Match Type	Description	Reason Code	Active	Process Sequence
1:1 Exact Match	One : One	Automatic	1:1 Exact Match	Exact Match	<input checked="" type="checkbox"/>	1
M:1 Exact Match	Many : One	Automatic	M:1 Exact Match	Exact Match	<input checked="" type="checkbox"/>	2
1:1 Date Tol 3	One : One	Suggested	1:1 Date Tol 3	Date Variance	<input checked="" type="checkbox"/>	3
M:1 Date Tol 3	Many : One	Suggested	M:1 Date Tol 3	Date Variance	<input checked="" type="checkbox"/>	4

See also:

- [Rule Types](#)
- [Match Types](#)
- [Reason Codes](#)

## Create Match Set Rule

1. On the **Match Set Administration** page, click **Rules**.
2. Click **Insert Row** and then double-click in the following cells to enter information:
  - **Name:** Enter a display name to identify the rule.
  - **Type:** Select the Rule Type you want to use from the drop-down list. For One Sided match see [Create a One-sided Match](#).
  - **Match Type:** Select the Match Type from the drop-down list.
  - **Description:** Enter additional information you want to display regarding the rule.
  - **Reason Code:** Select the appropriate reason code from the drop-down list.
3. Click the **Active** box to turn it on/off.
4. In the **Process Sequence** cell, enter the number indicating which order you want the rule run.
5. Click **Save**. The rules Definition pane will appear upon successful save.

### Create a One-sided Match

After you create the match set rule on the Rules tab, continue with these steps to create a one-sided match.

If you selected One Sided – DS3 then on the Grouping tab you will see fields only for Data Set 3, and Data Set 1 and Data Set 2 are blank. If you want to match transactions that cancel or reverse each other out, you can group by common fields such as Account, Entity, Cost Center, and Transaction Date, as shown below.

The image shows two configuration tabs for a match rule. The top tab, 'Attributes - Journals (DS3)', has a table with the following data:

Field Name	
AcT	
EtT	
CostCenter	

The bottom tab, 'Dates - Journals (DS3)', has a table with the following data:

Field Name	Days Before	Days After
TranDate	0	0

On the Definition tab, you can only set a tolerance amount for value fields (amount). In this example, the tolerance is set between -1 and 1.

The image shows the 'Definition' tab for a rule named 'DS3 Only'. It features a 'Values' section with a table defining tolerance ranges for the 'Am (Am)' field:

Field Name - Journals (DS3)	Under	Over
Am (Am)	1.000000000	1.000000000

With the criteria in the Grouping and Definition tabs set as above, the match rule creates matches where transactions have the same amount, entity, and cost center and the net of the transactions is less than or equal to 1 and greater than or equal to -1.

In this example, the two highlighted amounts would create a match.

## Transaction Matching

---

The screenshot shows a software interface with a table of transactions and a summary row. The table has columns for Transaction ID, Am, V1, Currency, TranDate, Act, EtT, CostCenter, Course, InvNo, CheckNo, JE, IcT, and Reason Code. The summary row has columns for Bank (DS1), GL (DS2), Journals (DS3), DS1 to DS2, and DS1 to DS3.

Transaction ID	Am	V1	Currency	TranDate	Act	EtT	CostCenter	Course	InvNo	CheckNo	JE	IcT	Reason Code
1137986	100.00	1.000000000	USD	1/1/2022 12:00:00 AM	1000	Augusta	CourseMgt	OaklandHills	INV001	CHK001	JE001	~	(Unassigned)
1137987	-101.00	1.000000000	USD	1/1/2022 12:00:00 AM	1000	Augusta	CourseMgt	OaklandHills	INV001	CHK001	JE001	~	(Unassigned)
1137988	50.00	1.000000000	USD	1/1/2022 12:00:00 AM	1000	Augusta	GolfPros	OaklandHills	INV001	CHK001	JE001	~	(Unassigned)
1137989	75.00	1.000000000	USD	1/1/2022 12:00:00 AM	1000	Augusta	GolfPros	OaklandHills	INV001	CHK001	JE001	~	(Unassigned)
1137990	-100.00	1.000000000	USD	1/1/2022 12:00:00 AM	1000	Augusta	GolfPros	OaklandHills	INV001	CHK001	JE001	~	(Unassigned)

Bank (DS1)	GL (DS2)	Journals (DS3)	DS1 to DS2	DS1 to DS3	
Am	0.00	0.00	-1.00	0.00	1.00

## Rule Types

The following Rule Types are available for two data set matches:

- **One to One (1:1):** An exact match in which a transaction in one data set is compared to a single transaction in the other.
- **One to Many (1:M):** A single transaction in one data set can be matched with one or more transactions (a grouping) in another.
- **Many to One (M:1):** One or more transactions (a grouping) in one data set are condensed into one transaction and then compared to a single transaction in another.
- **Many to Many (M:M):** One or more transactions (a grouping) in one data set are collapsed into a single amount and then compared to the same in another.
- **One Sided - DS1, One Sided - DS2, One Sided - DS3:** Match transactions within the same data set.

Additionally, the following Rule Types are available for three data set matches:

- One to One to One (1:1:1)
- One to One to Many (1:1:M)
- One to Many to One (1:M:1)
- Many to One to One (M:1:1)
- One to Many to Many (1:M:M)
- Many to Many to One (M:M:1)

## Transaction Matching

---

- Many to One to Many (M:1:M)
- Many to Many to Many (M:M:M)

## Match Types

- *Automatic matches* do not require acceptance or approval.
- *Suggested matches* require acceptance and may also require approval.


## Standard Rule Filters



Filters define the criteria for returning unmatched transactions.

You can create or edit filters for any rule by clicking **Filters** and applying them to any data set. Only the unmatched transactions returned by the filter are used during rule processing.

**TIP:** If a filter is applied to transaction data, then the Filter button displays in green.

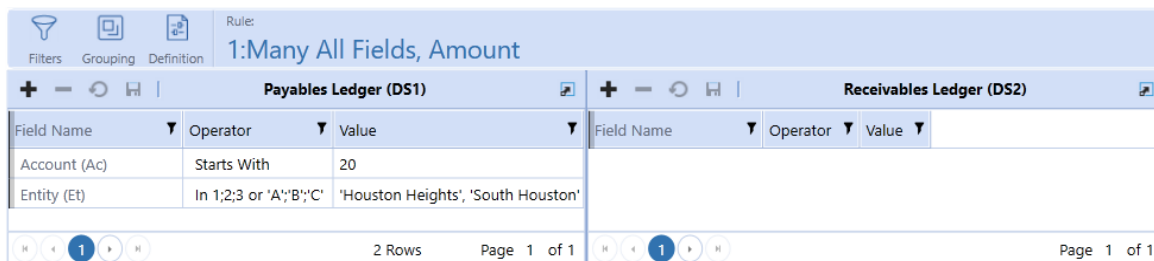

Payables Ledger (DS1)			Receivables Ledger (DS2)		
Field Name	Operator	Value	Field Name	Operator	Value
Account (Ac)	Starts With	20			
Entity (Et)	In 1;2;3 or 'A';'B';'C'	'Houston Heights', 'South Houston'			

- **Field Name:** Drop-down list containing all fields in the data set. Select the field to which you want the filter to be applied.
- **Operator:** Function used to combine items or determine the parameters in order to create a filter.
- **Value:** Information used by the operator.

## Transaction Matching

---

Operator	Definition
=	Is equal to the value specified (exact match). To return fields that are blank, leave Value blank.
>	Is greater than the value specified.
> =	Is greater than or equal to the value specified.
<	Is less than the value specified.
< =	Is less than or equal to the value specified.
< >	Is not equal to the value specified. To return fields that are not blank, leave Value blank.
In 1;2;3 or 'A'; 'B'; 'C'	Displays values that are the same as what is specified.
Between 1;2 or 'A'; 'Z'	Displays values that fall between the first and second values (including the listed values).
Starts With	Displays results where the data in the column starts with the value in the filter.
Does Not Start With	Displays results where the data in the column starts with anything except the value in the filter.
Ends With	Displays results where the data in the column ends with the value in the filter.
Does Not End With	Displays results where the data in the column ends with anything except the value in the filter.
Contains	Displays only records where the data in the column contains all the values in the filter.

## Transaction Matching

---

Operator	Definition
Does Not Contain	Displays only records where the data in the column does not contain any of the values in the filter.

**NOTE:** Syntax of the filter is validated when you click **Save**.

## Custom Rule Filters

In addition to the standard rule filters, administrators can create custom rule filters that use complex expressions.

**CAUTION:** Only advanced users should create custom rule filters.

Use custom rule filters to create filters more quickly and efficiently and reduce the need to duplicate filters with slight variations within the standard filter, which can be time consuming and also prone to error.

Administrators can set up standard and custom rule types for a data set. Whichever filter is selected is the one that is applied.

Field Name	Operator	Value
Account (AcT)	=	10004

1 Rows Page 1 of 1

1. Select **Custom Filter**.
2. Enter a custom rule and then click **Save**. The rule syntax is validated when you save.

## Rule Grouping



**Grouping** displays in the Rule Definition pane when you select a Many rule type.

## Transaction Matching

---

When you select a Many rule type, the Grouping icon displays, providing the ability to specify how to aggregate (group) the data. Once the grouping is defined, the items in the group become the only items available in the Definition Field Name list for selection, in addition to the Summary fields.

For each data set, you can group data by attributes (top) and apply date tolerances (bottom). Applying date tolerances in the Grouping tab creates a match rule that applies the date tolerances before grouping as opposed to after grouping. You can set up date tolerances to be applied after grouping in the Definition tab.

For a detailed example of how to use date tolerances, see [Date Grouping Tolerances Appendix](#).

Attributes - GL10003 (DS1)		Attributes - BNKBOA (DS2)	
Field Name		Field Name	
Invoice		Bnk Location	
		Account	
		Entitiv	
1 Rows Page 1 of 1		3 Rows Page 1 of 1	

Dates - GL10003 (DS1)		Dates - BNKBOA (DS2)	
Field Name	Days Before	Days After	
Post Date	1	1	
1 Rows Page 1 of 1		Page 1 of 1	

## Add Rule Grouping for Attributes

1. On the **Match Set Administration** page, click **Rules** and then select a *Many : One* or *Many to Many* rule type.
2. Click **Grouping**.
3. In the **Attributes** pane, click **Insert Row**.
4. Click on the inserted row and, from **Field Name**, select an attribute to group by.
5. Repeat Step 4 to add all attributes that you want to group by.
6. Click **Save**.

### Add Date Grouping Tolerances

For a detailed example of how to use date tolerances, see [Date Grouping Tolerances Appendix](#).

1. On the **Match Set Administration** page, click **Rules** and then select any rule type that uses Many for one of the data sets.
2. Click **Grouping**.
3. In the **Dates** pane, click **Insert Row**.
4. Click on the inserted row and, from **Field Name**, select a date field and then set the date tolerances. Date tolerances applied in the Grouping tab are applied pre-aggregation. Date tolerances applied post-aggregation are done in the Definition tab. For example, if set to 1 day before and 1 day after, before summing up the total amount based on the common attributes, there would be a date tolerance of 1 day before and after applied.
5. Repeat Step 4 until you have added all date attributes that you want to group by.
6. Click **Save**.

### Rule Definition



**Definition** displays detailed information about a selected rule.

The Rule Definition contains the data set field names, conditions, and tolerances for each rule.

The screenshot shows the 'Definition' tab of a rule configuration interface. The rule is named 'M:1 Exact Match'. Below the tabs, there is a table with columns for 'Field Name', 'Condition', and 'Value' for two data sets: 'GL10003 (DS1)' and 'BNKBOA (DS2)'. The table lists three attributes: 'Check No (A1)', 'Source Acct (Ac)', and 'Entity (EtT)', all with a condition of '(None)' and a value of '0'.

Attributes					
Field Name - GL10003 (DS1) ▼	Condition	Value	Field Name - BNKBOA (DS2) ▼	Condition	Value
Check No (A1)	(None)	0	Check No (A2)	(None)	0
Source Acct (Ac)	(None)	0	Source Acct (Ac)	(None)	0
Entity (EtT)	(None)	0	Entity (EtT)	(None)	0

### Attributes

- **Field Name (DS1):** Drop-down list containing all fields in the first data set (DS1). Select the field on which to perform the match. Each selected field must have a corresponding field in all other data sets.
  - **Condition:** Indicates the placement (None, Left, Right) set for DS1; this is particularly useful if there will be leading or trailing zeroes in one data set that may not exist in the other data sets. Rule conditions help guide the position the rule should be applied to for a certain data element. The position can start at the beginning of a string (left) or the end of a string (right). The Rule definitions have Conditions and Value fields for each data set.
  - **Value:** Integer field.
- **Field Name (DS2):** Drop-down list containing all fields in the second data set (DS2). Select the field on which to perform the match. Each selected field must have a corresponding field in all other data sets.
  - **Condition:** Indicates the placement (None, Left, Right) set for DS2.
  - **Value:** Integer field.
- **Tolerance Type:** Tolerances can be set on amount (Numeric dollar amount or Percentage) or date fields (Numeric only).
- **Under:** Default minimum is 0. (Example: 5.00)
- **Over:** Default maximum is 0.(Example: 5.00)

### Rule Tolerances


Tolerances can be set on amount (numeric dollar amount or percentage) or date fields (numeric only) to allow some variation when creating a match.

Date variations provide allowances for circumstances such as transit times when a transaction may arrive at a customer's ERP system and a bank/3rd party source on different dates.

#### Tolerance Example

If the amount tolerance equals plus or minus \$5 and the data in DS1 = 100, the rule will search for an amount in the corresponding DS2 for a range of \$95-105.

## Transaction Matching

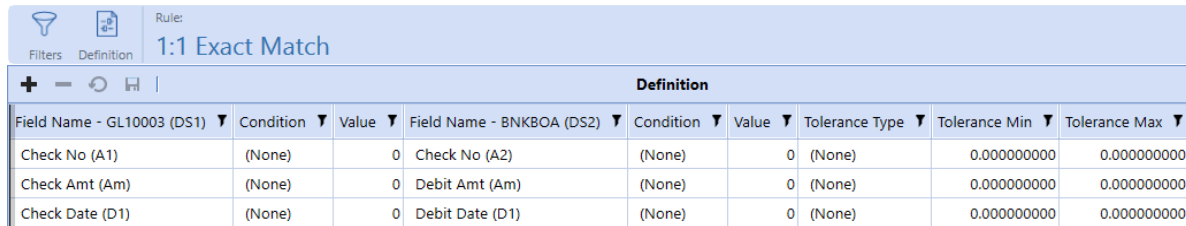

The screenshot shows a software interface for defining a '1:1 Exact Match' rule. It includes a header with 'Filters', 'Definition', and 'Rule: 1:1 Exact Match'. Below the header is a table with columns for 'Field Name - GL10003 (DS1)', 'Condition', 'Value', 'Field Name - BNKBOA (DS2)', 'Condition', 'Value', 'Tolerance Type', 'Tolerance Min', and 'Tolerance Max'. The table contains three rows of matching criteria.

Field Name - GL10003 (DS1)	Condition	Value	Field Name - BNKBOA (DS2)	Condition	Value	Tolerance Type	Tolerance Min	Tolerance Max
Check No (A1)	(None)	0	Check No (A2)	(None)	0	(None)	0.000000000	0.000000000
Check Amt (Am)	(None)	0	Debit Amt (Am)	(None)	0	(None)	0.000000000	0.000000000
Check Date (D1)	(None)	0	Debit Date (D1)	(None)	0	(None)	0.000000000	0.000000000


## Options



**Options** contains Match Set Options, Manual Matching Tolerances, and Reason Codes.

## Match Set Options

The following conditions can be required during the approval process. To activate/deactivate an option, select or clear the box and click **Save**.

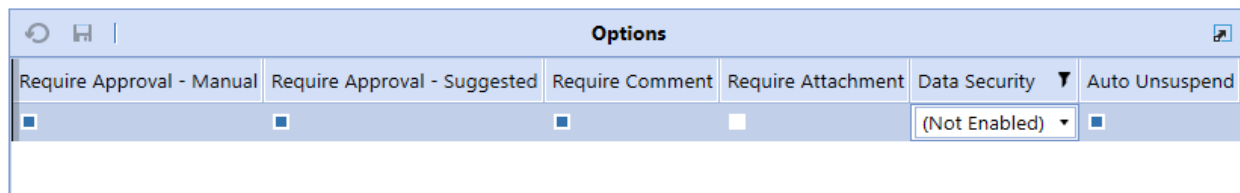

The screenshot shows the 'Options' configuration form with several checkboxes and a dropdown menu. The options are: 'Require Approval - Manual' (checked), 'Require Approval - Suggested' (checked), 'Require Comment' (checked), 'Require Attachment' (unchecked), 'Data Security' (dropdown menu showing '(Not Enabled)'), and 'Auto Unsuspend' (checked).

- **Require Approval (Manual):** An Approver must approve every manual match.
- **Require Approval (Suggested):** An Approver must approve every suggested match.
- **Require Comment:** A comment must be entered for every manual match.
- **Require Attachment:** An attachment must be uploaded to every manual match.
- **Data Security:** Select a Cube from the drop-down list to specify the Cube the Entity security will reference
- **Auto Unsuspend:** Unsuspend all suspended transactions that were suspended in any prior Workflow period, redefining them as Unmatched in the current Workflow period. This will allow match rules to run against the previously suspended transactions in the current Workflow period.

## Transaction Matching

---

**NOTE:** Anything that is suspended in the current Workflow period will remain suspended.

## Manual Matching Tolerances

Because manual matching is a transaction-selecting process, you can select transactions that have an amount variance range by defining and applying tolerances. A tolerance allows transactions to be matched when they do not have exact matching values (which would otherwise trigger human intervention). Defining a tolerance range (upper and lower levels of acceptable variance) tells the system how far outside of the exact amount it can consider an acceptable match.

Tolerance **Type** options are both **Numeric** or a **Percentage** of the total (or **None**) and different tolerances can be set against each of the Summary fields.



Admin Override	Approver Override	Summary 1 Type	Summary 1 Min	Summary 1 Max	Summary 2 Type	Summary 2 Min	Summary 2 Max	Summary 3 Type	Summary 3 Min	Summary 3 Max
<input type="checkbox"/>	<input type="checkbox"/>	(None)	0.000000000	0.000000000	(None)	0.000000000	0.000000000	(None)	0.000000000	0.000000000

**Admin Override** grants Administrators the ability to create manual matches even if the variance is outside the tolerances defined for any of the three Summary fields.

**Approver Override** grants Approvers the ability to create a manual match even if the variance is outside the tolerances defined for any of the three Summary fields.

**Summary 1, 2, 3 Type** options are (None), Numeric, or Percentage (of total).

**Summary 1, 2, 3 Min** defines the absolute value lower limit in which a difference is automatically accepted.


**Summary 1, 2, 3 Max** defines the absolute value upper limit in which a difference is automatically accepted.

## Set or Edit Manual Matching Tolerances

In the **Manual Matching Tolerances** pane on the **Options** page, select the fields you want to apply and click **Save**.

### Reason Codes

A reason code is a brief explanation or description of the match. Reason codes can be assigned through match rules or manual matches. They can be used for reporting purposes and/or to extract specific pieces of information.

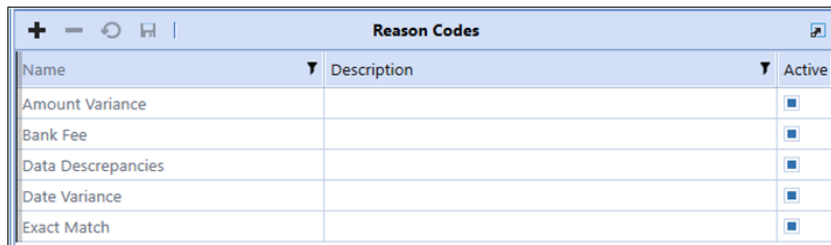

Name	Description	Active
Amount Variance		<input type="checkbox"/>
Bank Fee		<input type="checkbox"/>
Data Discrepancies		<input type="checkbox"/>
Date Variance		<input type="checkbox"/>
Exact Match		<input type="checkbox"/>

### Add New Reason Code

1. In the **Reason Codes** pane on the **Options** page, click **Insert Row**.
2. Click the **Name** cell and enter the name of the Reason Code.
3. Click the **Description** cell and enter an explanation of the Reason Code (optional but recommended).
4. Click **Save**.

### Edit a Reason Code

Updates to the reason code will only affect future matches not previous matches.

1. On the **Match Set Administration Page**, click **Rules**.
2. In the **Reason Code** column for a rule, click in the field to display a drop-down menu.
3. Select the reason code from the drop-down menu.
4. Click **Save**.

**NOTE:** After the reason code has been updated, the change does not affect any prior matches, only matches made going forward.

# Access



The **Access** page displays the user name and role for each team member in the current match set.

The **Access** page lists the <GroupName> team members who are permitted to work with the current match set and their role. It is where an existing role can be changed, and additional team members added. Match Set Administration is only accessible to Transaction Matching Administrators and Match Set Local Administrators.

See also: [Access Control](#)

## Add User to Match Set Access Group

1. On the **Match Set Administration** page, click **Access**.
2. In the Members pane, click **Insert Row**.
3. Click the **User** cell and select the name from the drop-down list.
4. When a new row is inserted, the **Role** defaults to **Preparer**. To change this setting, click the **Role** cell and select the role from the drop-down list.
5. Click **Save**.

## Modify User Role to Match Set Access Group

1. On the **Match Set Administration** page, click **Access**.
2. In the Members pane, click the name you want to modify in the **User** column.
3. Click the **Role** cell and select the appropriate role from the drop-down list.
4. Click **Save**.


## Remove User from Match Set Access Group

1. On the **Match Set Administration** page, click **Access**.
2. In the Members pane, click the name you want to remove in the **User** column.

## Transaction Matching

---


3. Click **Delete Rows**.
4. Click **Save**.

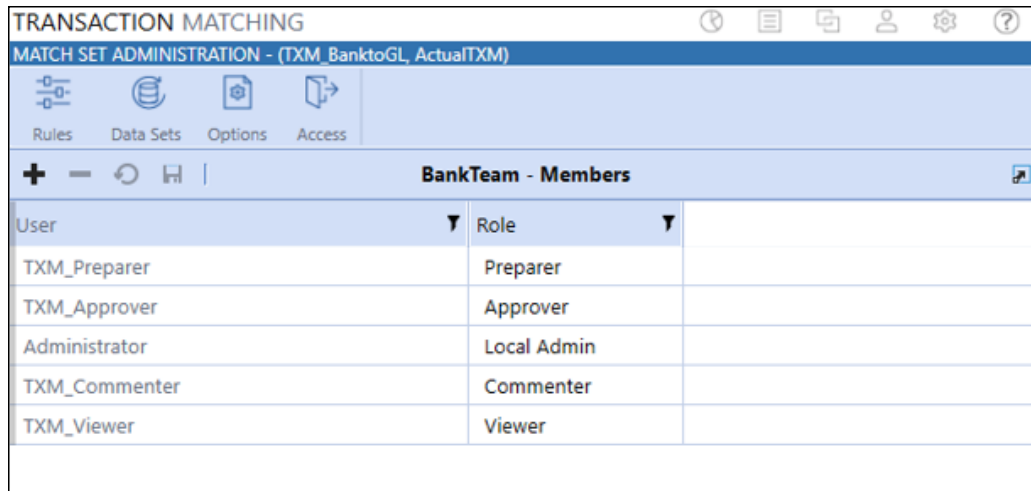

The screenshot shows the 'TRANSACTION MATCHING' application window. The title bar reads 'MATCH SET ADMINISTRATION - (TXM\_BanktoGL\_ActualTXM)'. Below the title bar is a navigation menu with icons for 'Rules', 'Data Sets', 'Options', and 'Access'. The main content area is titled 'BankTeam - Members' and contains a table with the following data:

User	Role
TXM_Preparer	Preparer
TXM_Approver	Approver
Administrator	Local Admin
TXM_Commenter	Commenter
TXM_Viewer	Viewer

## Matches

-  The **Matches** page displays a grid containing all matches made for the active Match Set and allows for Match Actions like Accepting, Approving, and Unmatching.

Matches are displayed in a Match Grid View (MGV), with a numerical summary on the header bar. The results in the MGV display can be further customized by selecting filters from the drop-down list.

**NOTE:** Only matches for the current workflow period are displayed.

## Match Filters

The Match filters narrow down the matches displayed in the grid.

## Transaction Matching

---

Filter Name	Filter Option	Description
Type	Manual	Require review and approval
	Suggested	Require review and acceptance
	Automatic	Created by the system via Rules
Rule	List	Dynamic list populated with all match set rules
Status	All	All Status states
	Pending	Suggested matches that have not yet been accepted
	Matched	Automatic, Accepted, Suggested, and Manual Matches
Approval	All	All Approval states
	Unapproved	Not yet been approved or a previous approval was retracted
	Approved	Approved either automatically or manually
	Not Required	Applies to Matches that are set to Approval Not Required for Manual and/or Suggested.
Reason Code	List	Dynamic list populated with all match set reason codes
Date Range	Today	Timespan
	7 Days	
	All	

### Header Bar Metrics

Total: 369  
Pending: 180  
Unapproved: 4

The header bar displays the number of unapproved, pending, and total matches. A Refresh icon is also available to refresh the Matches grid with the latest information.

### Matches Columns

Change the order in which Matches are displayed by clicking the Filter icon of any column.

- Match
- Type
- Rule
- Match By
- Match Date (UTC)
- Status
- Status By
- Status Date (UTC)
- Approval
- Approval By
- Approval Date (UTC)
- Reason Code
- Match Period
- Summary fields across each data set
- Match Date

## Transaction Matching

---

To Select	Do This
A single row	Click anywhere in the row or click the row's checkbox
Multiple non-contiguous rows	<ol style="list-style-type: none"><li>1. Click anywhere in a row.</li><li>2. Hold down the Ctrl key and select the next row.</li><li>3. Repeat until all rows are selected.</li></ol>
A contiguous group of rows	<ol style="list-style-type: none"><li>1. Click the first row of the group.</li><li>2. Hold down the Shift key and select the last row of the group.</li></ol>
Multiple contiguous groups of rows	<ol style="list-style-type: none"><li>1. Click the first row of the group.</li><li>2. Hold down the Shift key and select the last row of the group.</li><li>3. Hold down the Ctrl key and select the first row of the next group.</li><li>4. Press and hold Ctrl+Shift and select the last row of the next group.</li></ol>
Rows on multiple pages	<ol style="list-style-type: none"><li>1. Perform the steps for the row type you want to select.</li><li>2. Repeat until all rows on the page are selected.</li><li>3. Click the next page and repeat the procedure until all rows on all pages are selected.</li></ol>

## Rule Processing



**Process Match Set Rules** initiates a Data Management job on all active rules in a Match Set.

## Transaction Matching

Rule processing can be launched from either the **Matches** or **Transactions** page by a Preparer, Approver, Local Admin, or Transaction Matching Administrator. While the Data Management job runs in the background, its progress can be monitored at any time in **Task Activity**. Manual Matching is blocked while the process rules job is running. Only one active job per Match Set can be run at a time.

## Process Matches

1. On the Matches or Transactions page, click **Process**.
2. Click **OK** in the **Process Match Set Rules Started** dialog box.

## Match Detail

When you select a match in the Matches grid, the Match Detail appears beneath it. This pane contains the system-generated Match ID (an alphanumeric code beginning with the letter M), the rule that created the match, and a color-coded status box stating the Type, Status, and Approval state.

The Match Detail pane displays transactions matched from each data set. The number of transactions displayed in each pane is determined by the Rule Type. For example, a Many to One rule applied may result in the display of multiple transactions in the first data set (DS1) with a single transaction displayed in the second data set (DS2).

At the bottom of each section of the Match Detail pane are the summary totals. The number of summary totals displayed correlates to the number of summary fields previously determined in the data sets. The variance calculation will display in the appropriate pane.

GL10003 (DS1)					BNKBOA (DS2)						
Transaction	Check Date	Post Date	Check Amt	Detail Amt	Transaction	Load Period	Src Entity	Entity	Src Acc	Debit Ar	Detail Amt
T210608_000106126	2022-01-04	2022-01-04	-3,655.16	-3,655.16	T210608_000105753	2022M1	Heights	Houston	10003	-5,242.16	-5,242.16
T210608_000106128	2022-01-04	2022-01-04	-806.00	-806.00							
T210608_000106420	2022-01-04	2022-01-04	-781.00	-781.00							

	GL10003 (DS1)	BNKBOA (DS2)	DS1 to DS2
Check Amt	-5,242.16	-5,242.16	0.00

**IMPORTANT:** If Data Security is enabled, a user must have Entity access to view transaction-level information in Match Detail. If the user does not have access to any transaction in the match, an "access restricted" message is displayed.

### Match Detail Header Bar Metrics



The header bar of the Match Detail displays the Type, Status, and Approval of the match.

### Complete or Revert Workflow

Completing a workflow can be used to reflect that the process of matching transactions is done for the selected time period and can be performed from either the Matches or Transactions page. Only administrators have permission to complete or revert a workflow.

#### Complete a Workflow



**Complete WF** marks a workflow period **Complete**.

- On the **Matches** or **Transactions** page, click **Complete WF**.
- After a workflow is complete, the **Complete WF** icon is replaced by the **Revert WF** icon. When a workflow is complete:
  - All users can view the workflow but cannot edit or delete the existing information.
  - Commenters, preparers, approvers, and administrators can add comments.
  - Preparers, approvers, and administrators can add attachments.

#### Revert Workflow



The **Revert WF** removes the **Complete** checkmark from the workflow and restores it to an open status.

On the **Matches** or **Transactions** page, click **Revert WF**.

#### Export



**Export** takes filtered matches and transaction information and exports all or portions of the match data

**IMPORTANT:** If Data Security is enabled, only OneStream Administrators can export transactions.

## Transaction Matching

---

The Export option exports all or partial match data in the active match set into a comma-separated values (\*.csv) format. This information can be brought into account reconciliation activities, journal entry, reporting, or even third-party solutions for general or other entry work.

**IMPORTANT:** The Export feature requires the OneStream App for Windows.

## Export Match and Transaction Details

1. On the header bar of the **Matches** page, click **Export**.
2. Select the **Export Type** from the drop-down list and then click **Export**.




## Comments and Attachments


Comments and attachments can be added at either the Transaction level or the Match level.

### Add Comments and Attachments to a Suggested Match

1. In the **Matches** grid, select the matches that you want to accept.
2. Click **Comments** to add a comment.

**NOTE:** The **Comments** icon  changes to show when a match contains comments.

- Click **Attachments** to add a file to the match.
- Click **Upload**, navigate to the location of the file, and then click **Open**. Repeat the process to add additional files.

**NOTE:** The **Attachments** icon  changes to show when a match contains attached files.

3. Click **Accept** to finalize the match.

## Match Actions

Matches can be reviewed, and different actions can be taken on and through the **Matches** page.

## Automatic Matches

Automatic matches are generated by the system based on the match rules created for the match set and can be unmatched by the Approvers, Transaction Matching Administrator, and OneStream Administrators.

## View Automatic Matches

To display automatic matches in the Matches grid, on the Matches page, select **Automatic** from the **Type** drop-down list.

## Accepting/Unaccepting Suggested Matches

Suggested matches are matches made by the system that require acceptance. They may also require approval if **Require Approval - Suggested** is set under Match Set Options.

## Accept Suggested Matches

1. In the **Matches** grid, select the matches that you want to accept. You can select multiple matches and accept them together.
2. In the **Selected Matches** pane, click **Accept**.

## Unaccept Suggested Matches

A suggested match that has been accepted can be unaccepted if it is still unapproved. If it is already approved, it must be unapproved before the suggested match can be unaccepted.

1. In the **Matches** grid, select the accepted match.
2. In the **Match** pane, click **Unaccept**.

# Approving/Unapproving Suggested and Manual Matches

## Approve Matches

Automatic matches are approved when the match is made. Approving an unaccepted suggested match will bypass acceptance and approve the match in a single action.

1. In the **Matches** grid, select the matches that you want to approve. You can select multiple matches and approve them together.
2. In the **Selected Matches** pane, click **Approve**.

## Unapprove Matches

1. In the **Matches** grid, select the approved matches you want to unapprove. You can select multiple matches and unapprove them together.
2. In the **Match** pane, click **Unapprove**.

## Segregation of Duties

Transaction Matching honors strict Segregation of Duties for manual matches. If a user creates a Manual Match, the approval must be performed by another user.

## Unmatch Matches

When you **Unmatch** a match, these events occur:

- The transactions become available on the **Transactions** page.
- The match ID, comments, and attachments associated with the match are permanently removed.

## Remove a Suggested Match

1. In the **Matches** grid, select the checkbox next to the matches that you want to remove. You can select multiple matches and unmatch them together.

## Transaction Matching

---

2. Click **Unmatch** to remove the match.

The selected matches are removed from the **Matches** grid.

## Remove All Matches

OneStream Administrators can remove all matches for the current filter selections.

**NOTE:** If entity security is enabled, a Local Admin or Transaction Matching Administrator cannot unmatch for entities that they do not have access to.

1. In the **Matches** grid, make selections from the filters to identify the matches to be removed.
2. Click **Unmatch All**.
3. Confirm the match removal.


All matches for the selected filters are removed from the **Matches** grid.

## Multi-Match Actions

When you select multiple matches on the **Matches** grid, you can apply one of these actions to the selected matches:

- Accept
- Approve
- Unapprove
- Unmatch

## Transaction Matching

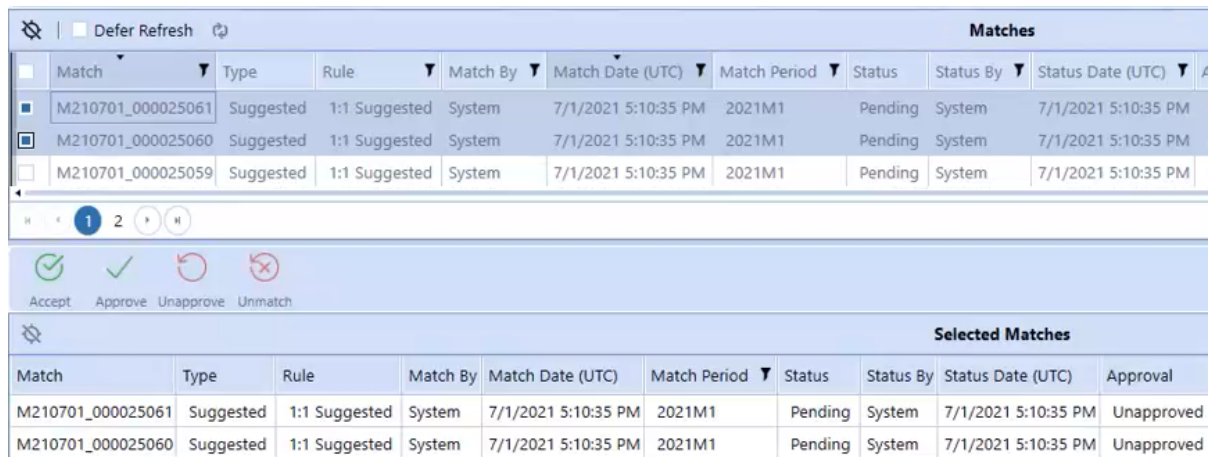


The screenshot displays the Transaction Matching interface. At the top, there is a 'Defer Refresh' button and a 'Matches' section. Below this is a table with columns: Match, Type, Rule, Match By, Match Date (UTC), Match Period, Status, Status By, and Status Date (UTC). Three rows are visible, all with a status of 'Pending'. Below the table are navigation icons (back, forward, search) and action buttons: Accept, Approve, Unapprove, and Unmatch. Below the actions is a 'Selected Matches' section with a table that includes an 'Approval' column. Two matches are listed, both with a status of 'Unapproved'.

Match	Type	Rule	Match By	Match Date (UTC)	Match Period	Status	Status By	Status Date (UTC)
M210701_000025061	Suggested	1:1 Suggested	System	7/1/2021 5:10:35 PM	2021M1	Pending	System	7/1/2021 5:10:35 PM
M210701_000025060	Suggested	1:1 Suggested	System	7/1/2021 5:10:35 PM	2021M1	Pending	System	7/1/2021 5:10:35 PM
M210701_000025059	Suggested	1:1 Suggested	System	7/1/2021 5:10:35 PM	2021M1	Pending	System	7/1/2021 5:10:35 PM

Match	Type	Rule	Match By	Match Date (UTC)	Match Period	Status	Status By	Status Date (UTC)	Approval
M210701_000025061	Suggested	1:1 Suggested	System	7/1/2021 5:10:35 PM	2021M1	Pending	System	7/1/2021 5:10:35 PM	Unapproved
M210701_000025060	Suggested	1:1 Suggested	System	7/1/2021 5:10:35 PM	2021M1	Pending	System	7/1/2021 5:10:35 PM	Unapproved

## Transactions

 The **Transactions** page displays a stacked grid view for all transactions.


**IMPORTANT:** If Data Security is enabled, users are only able to see transactions for the entities to which they have Read and Write access.

## Transaction Status

The **Transaction Status** drop down filters the transactions based on the current status of the transaction:

- [Unmatched](#)
- [Unmatched \(As of Period End\)](#)
- [Matched](#)
- [Suspended](#)
- [Pending Delete](#)
- [Deleted](#)

The Transaction page displays a stacked grid view by default with Data Source 1 (DS1) on top and Data Source 2 (DS2) under it. Click **Layout** to toggle the view between stacked and side-by-side.

**TIP:** You can click  in a column to filter and sort transactions.

## Unmatched

Select Unmatched to show all transactions that are not currently matched and manually match transactions. Manual matching is a process performed when transactions are not matched via the match rules.

## Create a Manual Match

On the **Transactions** page, select the transactions in each data set to be matched. The status bar at the bottom automatically updates the amounts and variance calculations as transactions are selected or cleared. When you make a manual match, these events occur:

- The match type “manual” is assigned to the match.
- A match ID is generated.
- The match status changes to **Matched**.

## Unmatching a Manual Match

Manual matches can be unmatched by Preparers, Approvers, Local Admins, and Transaction Matching Administrators. After approval, only Approvers or Transaction Matching Admins can unmatch a manual match.

## One-Sided Matches

One-sided matches are permitted when selecting more than one transaction in the same data set.

## Assign a Match Reason Code

Match reason codes can be used to aid in identifying issues with matches or individual transactions that may have required a manual match to be performed.

1. Select the transactions from the data sets.
2. On the status bar, select a reason from the **Match Reason Code** drop-down list.

## Transaction Matching

---

3. Click **Match +**.

### Create Quick Match

A Quick Match moves matched transactions out of the unmatched transaction list immediately upon selection without requiring additional steps such as adding comments or attachments.

1. Select the transactions from the data sets.
2. (Optional): Assign a **Match Reason Code**.
3. Click **Match**.

### Create Match Plus

Match Plus enables the creation of a match while providing an opportunity to add comments or attachments. When the process is complete, the transactions are matched, and any added comments or attachments are saved to the match.

1. Select the transactions from the data sets.
2. (Optional): Assign a **Match Reason Code**.
3. Click **Match +**.
4. (Optional): Click **Comments** to add a comment.
5. (Optional): Click **Attachments** to add a file to the match.
  - Click **Upload**, navigate to the location of the file, and then click **Open**.
  - Repeat to add additional files.
6. Click **Accept** to finalize the match or **Decline** to discard the match.

### Matching Outside of Tolerance

If tolerances are in place across any of the three summary fields and a variance exists then a match will not occur, and an error message is displayed. If the user's role lets them override this tolerance variance, a warning that the match variance is outside the tolerance is displayed.

See also: [Manual Matching Tolerances](#)

## Transaction Matching

---

### Suspend Transactions



Suspend a transaction to set it aside until it is ready for matching.

If there are transactions awaiting additional data, for example the need to wait for a first of month reconciliation, that transaction can be marked Suspended. This action removes the transaction from the Unmatched status and stores it until it is ready to be matched.

You can apply a reason code to explain why the transaction is being suspended. If the transaction becomes unsuspending or is moved to any other status besides suspended, the reason code is removed from the transaction. You can view reason codes when the transaction list is filtered to suspended transactions.

**NOTE:** Reason codes can only be applied from the Transactions page. You cannot apply them from the transaction details dialog.

When suspended transactions exist, a warning is visible at the top of every page in Transaction Matching and remains in place for as long as there are suspended transactions.



\*\*\*Warning: Suspended Transactions\*\*\*

To suspend a transaction:

1. Select **Unmatched** from the **Transaction Status** drop-down list.
2. Select the transactions you want to suspend.
3. (Optional): Select a **Reason Code**.
4. Click **Suspend**.

**IMPORTANT:** If Auto Unsuspend is not enabled, suspended transactions are excluded from rules-based matching.

### Delete Transactions



Delete a transaction that does not need to be matched.

## Transaction Matching

---

If there are transactions that will never be matched, for example a bank fee deemed immaterial, that transaction can be deleted and marked as Pending Delete. This action can be done by Preparers, Approvers, and Administrators and removes the transaction from the Unmatched status and moves it to the Pending Delete status.

To delete a transaction:

1. Select **Unmatched** or **Suspended** from the **Transaction Status** drop-down list.
2. Select the transactions you want to delete.
3. Click **Delete**.

## Unmatched (As of Period End)

Select **Unmatched (As of Period End)** to show all transactions that are unmatched in the current period, regardless of future period match status. For example, if there are 10 unmatched transactions in total for M1 and 6 are matched in M2, the filter for Unmatched (As of Period End) would show 10 transactions, and the filter for Unmatched would show 4 transactions.

## Matched

Select Matched to show all transactions that are matched and perform Match Actions in the **Transactions** page.

When you select Matched transactions, you can use these additional filters to change the transactions that display:

- **Match Reason Code:** Select one or more reason codes or **All**.
- **Match Period:** Select **All**, **Current Period**, or **Future Periods**.
- **Import Period:** Select one or more import periods or **All**.

See Also:

- [Match Actions](#)
- [Unmatch Matches](#)
- [Multi-Match Actions](#)

### Suspended

Selecting **Suspended** shows all transactions that are currently suspended. The period the transaction was suspended will be identified by the **Status Period** column. The reason for the suspension, if provided, displays in the **Reason Code** column. If **Auto Unsuspend** is enabled, transactions suspended in one **Workflow** period will be unsuspended in the next period, upon running **Process** in the new period. The **Status Period** will then reflect the new **Workflow** period, which is the period the transaction was automatically moved from suspended to unmatched.

### Unsuspending Transactions

1. From the **Transaction Status** drop-down list select **Suspended**.
2. Select the transactions you want to unsuspend.
3. Click **Unsuspend**.

The selected transactions are returned to the unmatched transaction grid.

### Pending Delete

Selecting **Pending Delete** shows all transactions that were deleted by users. Transactions with a **Pending Delete** state can be deleted or recalled which moves them back to the unmatched state. Only **Approvers**, **Transaction Matching Administrators**, or **OneStream Administrators** may move transactions to a **Deleted** state.

### Recalling Transactions

1. Select **Pending Delete** from the **Transaction Status** drop-down list.
2. Select the transactions you want to recall.
3. Click **Recall**.

When transactions are recalled, they are returned to the unmatched transaction grid.

### Deleted

Only **Transaction Matching Administrators** or **OneStream Administrators** have the ability to view deleted transactions. The ability exists to recall these transactions or to permanently remove the transactions from the transaction matching database tables.

## Transaction Matching

Once removed, the selected transactions are permanently removed from the Transaction Matching tables.

## Data Filters

On the Transactions page, you can apply data filters to all types of transactions. You can also use the Manage Filters dialog box to create, edit, clone, and delete filters for each data set.

Transaction ID	Check Date	Post Date	Check Amt	Check No	Invoice	JE Num	Source Acct	Account	Source Entity	Entity	Load Period	Amount	Reason Code	Additional Info
4125	2022-02-27	2022-02-28	-91.77	511AAA180	34795	2153766	10003	10100	Heights	Houston Heights	2022M3	-91.77	(Unassigned)	<input type="checkbox"/>
8481	2022-03-11	2022-03-31	-108.87	511AAA192	34843	2153766	10003	10100	Heights	Houston Heights	2022M3	-108.87	(Unassigned)	<input type="checkbox"/>
8772	2022-03-17	2022-03-31	-678.92	511AAA288	35227	2153766	10003	10100	Heights	Houston Heights	2022M3	-678.92	(Unassigned)	<input type="checkbox"/>
8789	2022-03-09	2022-03-31	-795.77	511AAA370	35555	2153766	10003	10100	Heights	Houston Heights	2022M3	-795.77	(Unassigned)	<input type="checkbox"/>
13204	2022-03-01	2022-03-31	-656.12	511AAA272	35163	2153766	10003	10100	Heights	Houston Heights	2022M3	-656.12	(Unassigned)	<input type="checkbox"/>
26981	2022-03-18	2022-03-31	-118.84	511AAA199	34871	2153766	10003	10100	Heights	Houston Heights	2022M3	-118.84	(Unassigned)	<input type="checkbox"/>

Data filters provide increased efficiency by letting you create and save filters that are applied to transactions within a data set. Data filters also enable you to:


- Filter on any dimension within the data set.
- Filter using wildcards and select multiple items to add to a filter.
- View and clone other users' filters within the match set.
- Edit and delete other users' filters within the match set and assign filters to other users (administrators only).

## Create a Filter

1. On the **Transactions** page, click **Filters**.
2. In the **Manage Filters** dialog box, click **Create**.

## Transaction Matching

---

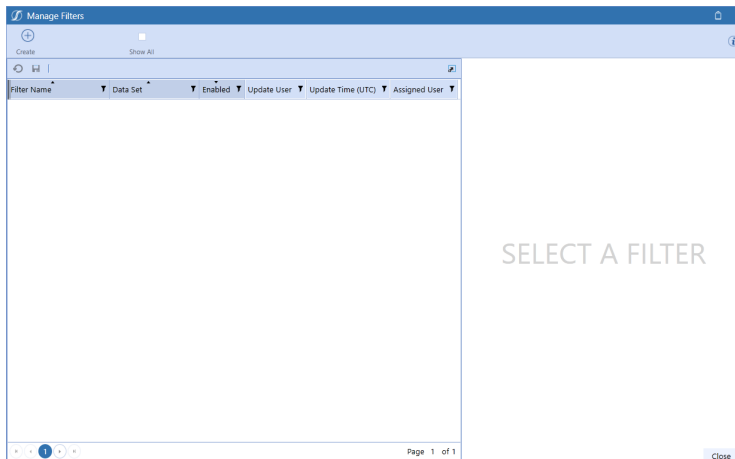

3. Complete the **Filter Name** field. The filter name will appear on the Transactions page in the filter drop-down menus. Each filter name must be unique within the data set for each assigned user. This field cannot be left blank.
4. Select the data set from the drop-down menu to indicate which data set will use the filter.
5. Click **Create**.

**NOTE:** In the Manage Filters dialog box, the box in the Enabled column is selected by default, which means that the filter will appear on the Transactions page in the filter drop-down menus. If the box is cleared, the filter is disabled and will not appear as an option in the drop-down menus.

6. Add filter information. See [Edit a Filter](#).
7. Click **Close**.

## Edit a Filter

1. On the **Transactions** page, click **Filters**.
2. In the **Manage Filters** dialog box, select the name of the filter to edit.

## Transaction Matching

---

**TIP:** To view a list of all filters created by other users within the same match set, select the **Show All** option. All users are able to view and clone other users' filters within the match set. Administrators can also edit and delete other users' filters within the match set.

**NOTE:** Administrators can assign filters to other users. In the **Assigned User** column for a filter, click in the field to display a drop-down menu and select the user.



3. Fields for the filters that you can apply to the data set are listed: Attributes, Dates, Values, and Dimensions. There is also a Notes field where you can enter a description for the filter. In the **Manage Filters** dialog box, enter the filter information.

**NOTE:** To clear the contents of a filter field, click .

**TIP:** For Dates fields, the Start Date must be before the End Date.

**TIP:** For Values fields, the value entered must be a decimal, and the minimum value must be less than or equal to the maximum value.

You can also enter information in the Attributes and Dimensions fields using the Selector dialog box.

- a. Click  to open the **Selector** dialog box.
- b. (Optional) Type filter information in the **Filter** field.
- c. (Optional) Click  to apply the filter.
- d. Select the boxes next to the items in the list to select one or more options.
- e. Click **Save**.

You can also filter using wildcards in the filter fields in the Manage Filters dialog box and the Selector dialog box. This table shows the information about filtering using wildcards. Click

 to see this information displayed in the Manage Filters dialog box and the Selector dialog box.

## Transaction Matching

Operator	Definition	Example
_	Represents a single character	Filter for invoices set as "34_7_" would return any invoices where the first two digits are "3" and "4" and fourth digit is "7". The third, fifth, and sixth digit could be anything (i.e., "340785" or "345722" could be returned).
%	Represents zero or more characters	Filter for invoices set as "34%" would return all invoices that start with "34" as the first two digits and the last digits could be anything (i.e., "3450" or "345001" could be returned).
[ ]	Represents any single character within the brackets	Filter for invoices set as "3[45]00" would return any invoices with "4" or "5" as the second digit (i.e., "34000" or "35000" could be returned).
^	Represent any character not in the brackets	Filter for invoices set as "3[^45]00" would return any invoices where the second digit is not "4" or "5" as the second digit (i.e., "36000" or "37000" could be returned but not "34000" or "35000").
-	Represents any single character with the specified range	Filter for invoices set as "3[4-6]00" would return any invoices where the second digit is within the bracketed range (i.e., "34000", "35000", or "36000" could be returned).

## Transaction Matching

---

Operator	Definition	Example
'A', 'B', 'C'	Represent a string or specific, distinct value. Display values that are the same as what is specified	Filter for invoices set as "340000, 340001, 340002" would return those exact invoices only or if the invoices do not exist, nothing is returned.

4. Click **Save**.
5. Click **Close**.

## Clone a Filter

1. On the **Transactions** page, click **Filters**.
2. In the **Manage Filters** dialog box, select the name of the filter to clone.

**TIP:** To view a list of all filters created by other users within the same match set, select the **Show All** option. All users are able to view and clone other users' filters within the match set. Administrators can also edit and delete other users' filters within the match set.

3. Click **Clone**.
4. Complete the **Filter Name** field. The filter name will appear on the Transactions page in the filter drop-down menus. Each filter name must be unique within the data set for each assigned user. This field cannot be left blank.
5. Click **Create**.
6. Click **Close**.

## Delete a Filter

1. On the **Transactions** page, click **Filters**.
2. In the **Manage Filters** dialog box, select the name of the filter to delete.

## Transaction Matching

**TIP:** To view a list of all filters created by other users within the same match set, select the **Show All** option. All users are able to view and clone other users' filters within the match set. Administrators can also edit and delete other users' filters within the match set.

3. Click **Delete**.
4. Click **Delete** to confirm.
5. Click **Close**.

## Apply Filters

1. On the **Transactions** page, the filter drop-down menus display the list of saved (and enabled) filters that you created: **Filter (DS1)**, **Filter (DS2)**, and, if a third data set is included in the match set, **Filter (DS3)**.
2. In each drop-down menu, select the filter to apply it to the data set.

## Transaction Details

Select a transaction to review the transactional level details, including comments and attachments. You can also drill back to the source level information. Select a transaction from a data set and then click on the corresponding **Details** button.

The screenshot displays two data sets in a table format. The first table, titled "GL10003 (DS1)", has columns for Transaction, Check Date, Post Date, Check Amt, Detail Amt, Check No, Invoice, JE Num, Srce Entity, Entity, and Srce Acct. The second table, titled "BNKBOA (DS2)", has columns for Transaction, Load Period, Srce Entity, Entity, Srce Acct, Debit Amt, Detail Amt, Descrip, Check No, Debit Date, and BnkAcct#. Below the tables, a summary row shows the total check amount for each data set and a combined total. At the bottom, there are several action buttons, with two "Details" buttons highlighted by a red box.

Transaction	Check Date	Post Date	Check Amt	Detail Amt	Check No	Invoice	JE Num	Srce Entity	Entity	Srce Acct
T210608_000106320	2021-12-14	2021-12-14	-588.32	-588.32	5001599	75790	3053676	Heights	Houston Heights	10003
T210608_000106327	2022-01-18	2022-01-18	-164,520.35	-164,520.35	5101600	75791	3053677	South	South Houston	10003
T210608_000106447	2022-01-18	2022-01-18	-164,520.35	-164,520.35	5101600	75791	3053677	Heights	Houston Heights	10003

Transaction	Load Period	Srce Entity	Entity	Srce Acct	Debit Amt	Detail Amt	Descrip	Check No	Debit Date	BnkAcct#
T210608_000105831	2022M1	Heights	Houston Heights	10003	-8.00	-8.00	NSF	SF65	2022-01-31	BN#1234567
T210608_000105832	2022M1	Heights	Houston Heights	10003	-55.00	-55.00	Bank Fee	SF34	2022-01-31	BN#1234567

	GL10003 (DS1)	BNKBOA (DS2)	DS1 to DS2
Check Amt	-164,520.35	-8.00	-164,512.35

Dashboard - Tran TXM\_BanktoGL - New

## Transaction Matching

### Drill Back

When you click **Drill Back**, information for any Dimension data that was not null upon import is displayed. Additionally, the dialog displays the source data that was loaded, the target (transformed data), the transformation rule that was applied, and if the sign was flipped.

Dimension	Cube Dimension	Source Value	Target Value	Rule Group	Rule Name	Description	Flip Sign	Rule Type	Rule Expression
Et	CorpEntities	68	Montreal	CorpEntities	68	Montreal	<input type="checkbox"/>	TransformOneToOne	
Ac	HoustonAccounts	10003	10100	HoustonAccounts	CashBalance	Cash & Disbursements	<input type="checkbox"/>	TransformRange	10001~10100
Ic	IC	None	None	IC	None		<input type="checkbox"/>	TransformOneToOne	
Cn		Local	Local				<input type="checkbox"/>		
Sn		(Current)	ActualTXM				<input type="checkbox"/>		
Tm		(Current)	2022M1				<input type="checkbox"/>		
Vw	View	YTD	YTD	View	YTD		<input type="checkbox"/>	TransformOneToOne	
Fw	Flows	None	None	Flows	None		<input type="checkbox"/>	TransformOneToOne	
Og		Import	Import				<input type="checkbox"/>		
U1	CostCenters	None	None	CostCenters	None	NONE	<input type="checkbox"/>	TransformOneToOne	
U2	CorpProducts	None	None	CorpProducts	None		<input type="checkbox"/>	TransformOneToOne	
U3	CorpSalesRegions	None	None	CorpSalesRegions	None		<input type="checkbox"/>	TransformOneToOne	
U4	Custom4	None	None	UD4	None		<input type="checkbox"/>	TransformOneToOne	
U5	GAAPs	None	None	GAAPs	None		<input type="checkbox"/>	TransformOneToOne	

**IMPORTANT:** Data imported for Transaction Matching is cleared from stage at the conclusion of the import. Therefore, source data cannot be retransformed in Transaction Matching and must be loaded.


### Export Transactions

Transactions displayed in a grid can be exported from the **Transactions** page.

## Transaction Matching

---

1. Select the transactions you want to export.
2. Right-click anywhere on the selection of rows and click **Export > To Csv**.

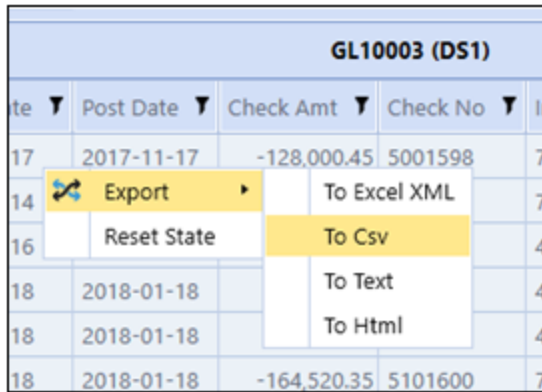

3. Navigate to the location you want to save the file. Enter the file name and click **Save**.  
Open the extracted file in Excel to view the exported information.

## Multi-Row Selection

By using the mouse and the keyboard, you can select multiple rows in a grid view, including items that are not next to each other (non-contiguous), even if they are on different pages. To clear all the selections made, click **Deselect All** or **Refresh**.

To Select	Do This
A single row	Click anywhere in the row.
Multiple non-contiguous rows	<ol style="list-style-type: none"><li>1. Click anywhere in a row.</li><li>2. Hold down the Ctrl key and select the next row.</li><li>3. Repeat until all rows are selected.</li></ol>
A contiguous group of rows	<ol style="list-style-type: none"><li>1. Click the first row of the group.</li><li>2. Hold down the Shift key and select the last row of the group.</li></ol>

To Select	Do This
Multiple contiguous groups of rows	<ol style="list-style-type: none"><li>1. Click the first row of the group.</li><li>2. Hold down the Shift key and select the last row of the group.</li><li>3. Hold down the Ctrl key and select the first row of the next group.</li><li>4. Press and hold Ctrl+Shift and select the last row of the next group.</li></ol>
Rows on multiple pages	<ol style="list-style-type: none"><li>1. Perform the steps for the row type you want to select.</li><li>2. Repeat until all rows on the page are selected.</li><li>3. Click the next page and repeat the procedure until all rows on all pages are selected.</li></ol>

## Export Transactions Page

You can export transactions into a comma-separated values (.csv) format. Use this information for account reconciliation activities, journal entries, and manual matching. Transactions displayed as a result of filters will be the same that are exported to the .csv (exception is column specific filters will not be applied to the transactions exported).

1. On the **Transactions** page, click **Export**.
2. Select the data set or all data sets that you want to export.
3. Click **Export**.

## Scorecard

 The **Scorecard** page contains the **Match Set Scorecard** and **Analysis** pages.

The Scorecard provides insights into the status of the match set while the corresponding Analysis pages provide more detailed operational data.

**IMPORTANT:** The Match Set Scorecard and Analysis require the OneStream App for Windows.

### Match Set Scorecard




The **Scorecard** is a visual display of Key Performance Indicators of the active match set based on a selected Time Period.



Statistics are based on transactions for which a user has access that were loaded and/or matches created in the selected Date Range. Information is available in the following areas:

- **Transaction Information** is a text-based summary of all transactions.
- **Match Information** is a text-based summary of match results.
- **Matches by Type** is a pie chart that displays the number of Automatic, Manual, and Suggested matches while also showing the proportional to the sum of all matches in the match set. Hover the mouse over the titles to view total and percentage values.
- **Transaction Status** is a stacked bar chart displaying the number of Unmatched, Matched, Suspended, Pending Delete, and Deleted transactions, with the data sets on the vertical axis and their values along the horizontal axis. Hover the mouse over the chart to view totals by transaction status.
- **Top 20 Rules by Transaction** is a stacked column chart that displays the rule type along the horizontal axis and their values on the vertical axis. Hover the mouse over a shaded section to view the rule name and results.

**IMPORTANT:** If Data Security is enabled, information displayed relates to the user's security access.
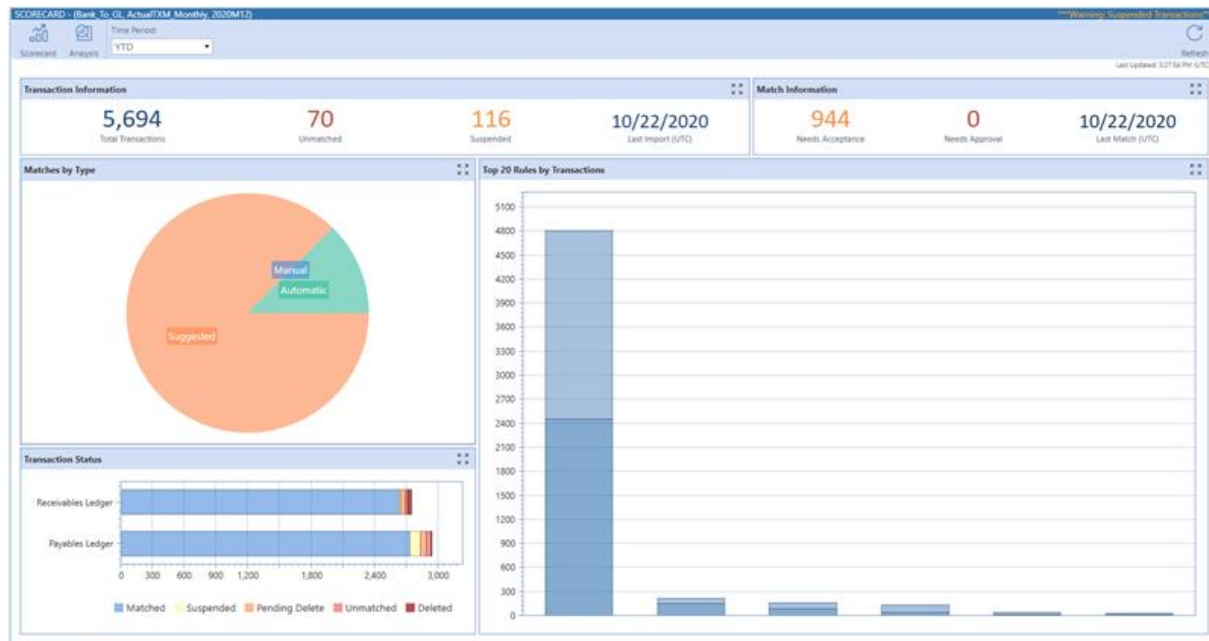
## Transaction Matching



**TIP:** Click  to maximize and  to minimize a section of the Scorecard.

## Analysis



Analysis contains pivot information for transactions loaded in the selected Time Period by data set and matches made during the Time Period by rule, variances, or comments and attachments based on a selected Time Period.

The following operational reports are available from the Analysis page based on the user's transaction access:

- **Transactions by Data Set** displays totals for each data set as well as grand totals for Unmatched, Suspended, Manual, Suggested, and Automatic matches. Each row also shows the percentage matched.
- **Matches by Rule** displays totals for Matches, Transactions, Pending, and Unapproved for each rule included in the workflow. The information is also displayed in percentage form for Accepted and Approved and provides the Last Match Date.
- **Matches with Variance** lists matches containing a variance that can be filtered and/or sorted by Status or Approval detail, Reason Code, amount information, or Transaction by data source.

## Transaction Matching

---

- **Matches with Comments or Attachments** lists matches that contain comments or attachments.



Select a row in any of the above grids and click **Details** to view the complete Match Details.

To create custom reports for Transaction Matching, the following tables and views are useful:

- XFW\_TXM\_Transaction
- vXFW\_TXM\_TransactionDetail
- vXFW\_TXM\_TransactionDetailMatched
- vXFW\_TXM\_TransactionDetailWithSource

If you have a large volume of data, use a large data pivot grid.

## Data Splitting

Data Splitting provides the ability to divide a single data source between numerous data sets across multiple Match Sets. This flexibility enables the file to be accessed across different areas such as departments or divisions, while controlling access and visibility through the separate match sets.

### Data Splitting Setup

#### Assign Data Splitting Workflow Profile


*Data Splitting Workflow Profile* are base input parent workflow profiles that are available for Data Splitting. When applied, all base input imports under this profile are available for data splitting setup.

1. On the **Settings** page, click **Global Options** and then select the Data Splitting Workflow Profile from the drop-down list.

## Transaction Matching

---

2. Click **Save**.

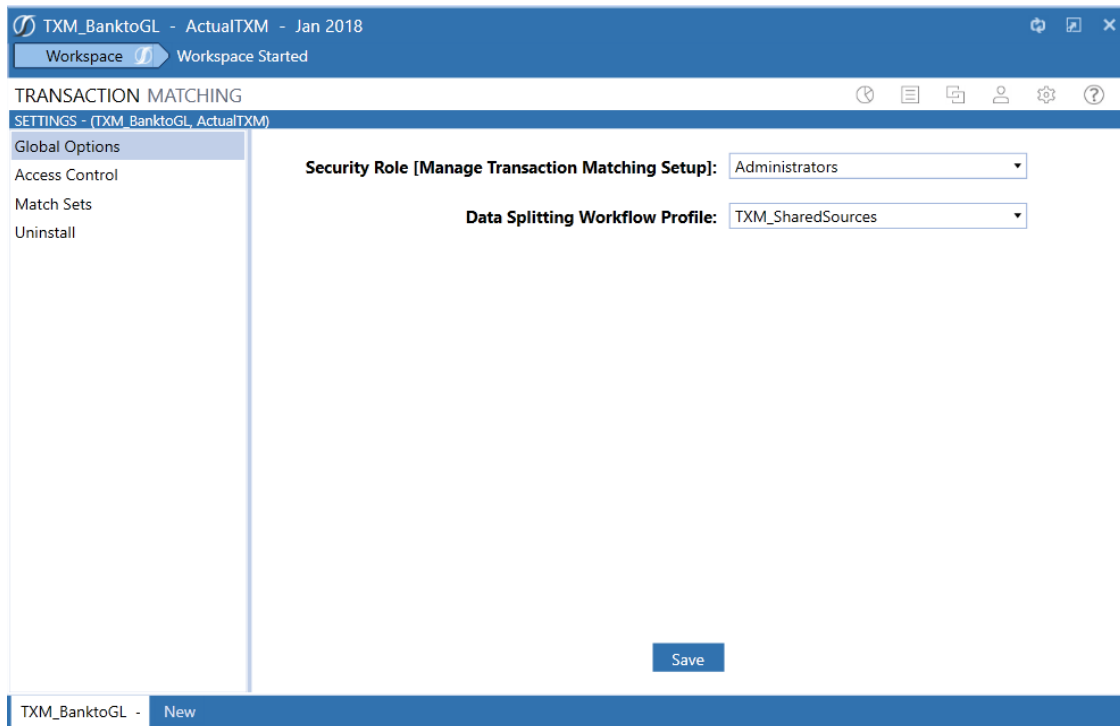

## Set up Data Splitting Dashboard

1. On the Application tab, click **Workflow > Workflow Profiles > {Select Your Transaction Matching Review Level WF}**
2. Click the Workflow Profile and the Scenario you want to assign.
3. On the **Profile Properties** tab in the Workflow Settings section, adjust the following settings:
  - **Cube Name:** Select the Cube Name from the drop-down list.
  - **Workflow Name:** Select Workspace from the drop-down list.
  - **Workspace Dashboard Name (Custom Workflow):** Click **Edit (...)**, select **0\_DataSplitting\_TXMT – Transaction Matching** from the drop-down list and then click **OK**.

## Transaction Matching

---

4. Click **Save**.

Workflow Settings	
Cube Name	TXM
Workflow Name	Workspace
Workspace Dashboard Name (Custom Workflow)	0_DataSplitting_TXMT - Transaction Matching

**IMPORTANT:** Uninstall UI will reset the Workspace Dashboard name to (Unassigned). An Administrator must manually reassign the Workspace Dashboard name after performing an Uninstall UI.

## Source Import

The source imports are the Base Import Children in the Data Splitting Workflow Profile assigned to a data set.

## Filters




The **Filters** page provides for the management of data splitting filters which determine how transactions are split between the various target data sets.

On the **Filters** page, there is no limit to the number of filters you can create and modify. At any time, you can refine the processing order of the application of these filters to a target data set in the Source Import.

## Add Splitting Filters

1. On the **Data Splitting** page, select a data source from the **Source Import** drop-down list.
2. In the **Target Data Sets** pane, click the data set where the split data will be added.
3. In the **Splitting Filters** pane, click **Insert Row** to add a filter to the selected import source.
4. Click **Save** when you have finished adding or editing the filters.

## Transaction Matching

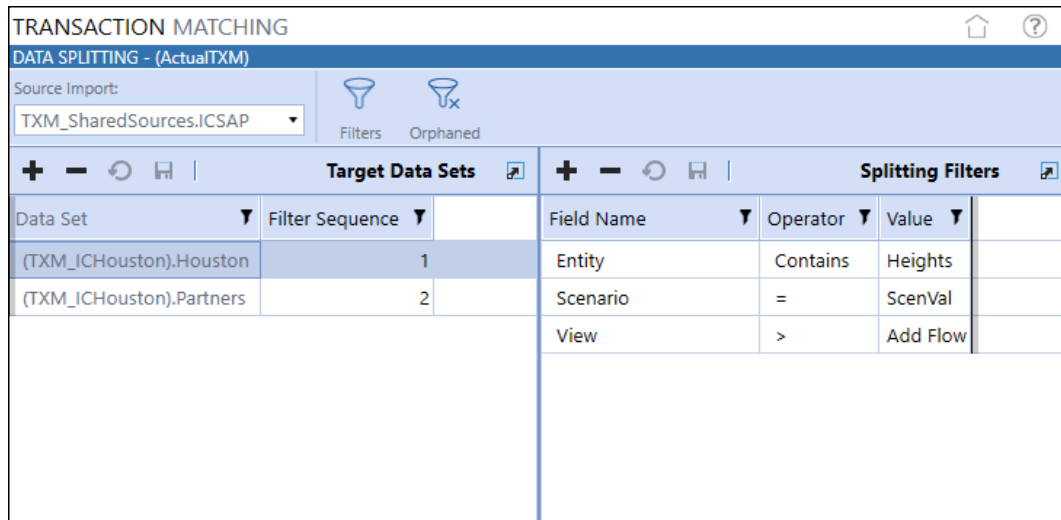

### Target Data Sets

- Data Sets display in the **Target Data Sets** pane after the Source Import is selected.
- For target data sets to show up in data splitting, they must already be assigned to the match set data set.
- **Filter Sequence** is the order in which filters are applied to the source import to determine where each transaction is split to.

### Splitting Filters

- **Field Name** is a drop-down list containing all fields in the selected target data set.
- The **Operator** in a filter specifies how filter criteria relate to one another.
- **Value** is the information used by the operator.

Operator	Definition
=	Is equal to the value specified (exact match).
>	Is greater than the value specified.

## Transaction Matching

---

Operator	Definition
> =	Is greater than or equal to the value specified.
<	Is less than the value specified.
< =	Is less than or equal to the value specified.
< >	Is not equal to the value specified.
In 1;2;3 or 'A'; 'B'; 'C'	Displays values that are the same as what is specified.
Between 1;2 or 'A'; 'Z'	Displays values that fall between the first and second values (including the listed values)
Starts With	Displays results where the data in the column starts with the value in the filter.
Does Not Start With	Displays results where the data in the column starts with anything except the value in the filter.
Ends With	Displays results where the data in the column ends with the value in the filter.
Does Not End With	Displays results where the data in the column ends with anything except the value in the filter.
Contains	Displays only records where the data in the column contains all the values in the filter.
Does Not Contain	Displays only records where the data in the column does not contain any of the values in the filter.

## Orphaned



The **Orphaned** transactions grid displays transactions that were not picked up through the application of filters and weren't imported and split into a target data set.

## Transaction Matching

Orphaned transactions are displayed in a grid that can be filtered and/or sorted. This process is intended to provide visibility in order to determine which transactions need to be manually assigned to a data set.

The screenshot shows the 'TRANSACTION MATCHING' interface. At the top, it says 'DATA SPLITTING - (Actual TXM)'. Below that, there's a 'Source Import' dropdown set to 'TXM\_SharedSources.Suspe...'. There are 'Filters' and 'Orphaned' icons. The main area is a table titled 'Orphaned Transactions'. The table has columns for TransactionID, TransactionNm, FKDataSetID, Wk, Wsk, WWK, Status, StatusDate, ImportDate, FKMatchID, Am, Lb, SI, Tv, Et, Pr, Cn, Sn, Tm, Vw, Ac, Fw. The table contains 20 rows of transaction data. At the bottom, there's a 'Data Set' dropdown and an 'Assign' button. The status bar shows '61 Rows Page 1 of 2'.

## Managing Orphaned Transactions

There are two ways to manage orphaned transactions:

1. Analyze the transactions in the orphaned transactions grid and create or edit a match set rule filter to catch the transactions. (Best Practice)
2. Manually assign orphaned transactions to a data set.

**NOTE:** Filters created for a source import in data splitting are only applied to that import source.

## Manually Assign Orphaned Transactions to a Data Set

1. In the Orphaned transactions grid, select the transactions you want to assign.
2. Select the appropriate data set from the **Data Set** drop-down list.
3. Click **Assign**.

# Preparing External Files

For integration purposes, the transactional level data must contain the applicable dimensionality to correlate the transaction to the respective reconciliation. In many cases, this is S.Entity, S.Account, T.Entity, and T.Account but could also contain other tracking levels such as UDs if required.

The source dimensionality is often in the files pulled from the ERP. However, third party or external systems may be used for matching purposes and these files most likely will not have the source information needed.

Follow these steps to pre-process the data to enhance the external files so that upon import the transactional line contains the source dimensions based on a field in the data.

**NOTE:** All lookups in this example were put into a single lookup table and run on a single parser rule but could be broken out if significant lookups are required.

# Transaction Matching

1. Data source creation, map file to the specific fields.  
**Example: Mapped Entity and Account from the bank**

**Data Sources - TXM\_BankBOA (HoustonEntities)**

Description	Amount	CheckNo	Check Date	Account No.	Location	Ref #	Proc Date	Statement Date
1 BOA Disbursement	-5431.16	520476	3/8/2022	BN#123456789	HHBranch123USA	1243787	3/8/2022	4/5/2022
2 BOA Disbursement	-5467.16	510536	3/22/2022	BN#123456789	HHBranch123USA	1243844	3/22/2022	4/5/2022
3 BOA Disbursement	-5410.16	510441	3/3/2022	BN#123456789	HHBranch123USA	1243768	3/3/2022	4/5/2022
4 BOA Disbursement	-5410.16	510441	3/3/2022	BN#123456789	HHBranch123USA	1243768	3/3/2022	4/5/2022
5 BOA Disbursement	-5494.16	510581	3/31/2022	BN#123456789	HHBranch123USA	1243880	3/31/2022	4/5/2022
6 BOA Disbursement	-5491.16	520576	3/28/2022	BN#123456789	HHBranch123USA	1243867	3/28/2022	4/5/2022
7 BOA Disbursement	-5461.16	520526	3/18/2022	BN#123456789	HHBranch123USA	1243827	3/18/2022	4/5/2022
8 BOA Disbursement	-65955.61	5201534	3/10/2022	BN#123456789	HHBranch123USA	1243797	3/10/2022	4/5/2022
9 BOA Disbursement	-5419.16	510456	3/6/2022	BN#123456789	HHBranch123USA	1243780	3/6/2022	4/5/2022
10 BOA Disbursement	-66102.61	5201597	3/31/2022	BN#123456789	HHBranch123USA	1243881	3/31/2022	4/5/2022
11 BOA Disbursement	-65962.61	5201537	3/11/2022	BN#123456789	HHBranch123USA	1243801	3/11/2022	4/5/2022
12 BOA Disbursement	-66011.61	5201558	3/18/2022	BN#123456789	HHBranch123USA	1243829	3/18/2022	4/5/2022
13 BOA Disbursement	-5494.16	520581	3/29/2022	BN#123456789	HHBranch123USA	1243871	3/29/2022	4/5/2022
14 BOA Disbursement	-5500.16	63541	3/31/2022	BN#123456789	HHBranch123USA	1243755	3/31/2022	4/5/2022
15 N F	-8	5F65	1/31/2022	BN#123456789	HHBranch123USA	1243886	1/31/2022	4/5/2022

**Configuration for HoustonEntities:**

- Name: Et
- Data Type: Text
- Position Settings: Column Number: 6
- Logical Operator: Business Rule
- Logical Expression: TransformSource\_Preimport\_Lookup

**Data Sources - TXM\_BankBOA (HoustonAccounts)**

Description	Amount	CheckNo	Check Date	Account No.	Location	Ref #	Proc Date	Statement Date
1 BOA Disbursement	-5431.16	520476	3/8/2022	BN#123456789	HHBranch123USA	1243787	3/8/2022	4/5/2022
2 BOA Disbursement	-5467.16	510536	3/22/2022	BN#123456789	HHBranch123USA	1243844	3/22/2022	4/5/2022
3 BOA Disbursement	-5410.16	510441	3/3/2022	BN#123456789	HHBranch123USA	1243768	3/3/2022	4/5/2022
4 BOA Disbursement	-5410.16	510441	3/3/2022	BN#123456789	HHBranch123USA	1243768	3/3/2022	4/5/2022
5 BOA Disbursement	-5494.16	510581	3/31/2022	BN#123456789	HHBranch123USA	1243880	3/31/2022	4/5/2022
6 BOA Disbursement	-5491.16	520576	3/28/2022	BN#123456789	HHBranch123USA	1243867	3/28/2022	4/5/2022
7 BOA Disbursement	-5461.16	520526	3/18/2022	BN#123456789	HHBranch123USA	1243827	3/18/2022	4/5/2022
8 BOA Disbursement	-65955.61	5201534	3/10/2022	BN#123456789	HHBranch123USA	1243797	3/10/2022	4/5/2022
9 BOA Disbursement	-5419.16	510456	3/6/2022	BN#123456789	HHBranch123USA	1243780	3/6/2022	4/5/2022
10 BOA Disbursement	-66102.61	5201597	3/31/2022	BN#123456789	HHBranch123USA	1243881	3/31/2022	4/5/2022
11 BOA Disbursement	-65962.61	5201537	3/11/2022	BN#123456789	HHBranch123USA	1243801	3/11/2022	4/5/2022
12 BOA Disbursement	-66011.61	5201558	3/18/2022	BN#123456789	HHBranch123USA	1243829	3/18/2022	4/5/2022
13 BOA Disbursement	-5494.16	520581	3/29/2022	BN#123456789	HHBranch123USA	1243871	3/29/2022	4/5/2022
14 BOA Disbursement	-5500.16	63541	3/31/2022	BN#123456789	HHBranch123USA	1243755	3/31/2022	4/5/2022
15 N F	-8	5F65	1/31/2022	BN#123456789	HHBranch123USA	1243886	1/31/2022	4/5/2022

**Configuration for HoustonAccounts:**

- Name: Ac
- Data Type: Text
- Position Settings: Column Number: 5
- Logical Operator: Business Rule
- Logical Expression: TransformSource\_Preimport\_Lookup

# Transaction Matching

## 2. Create a transformation lookup rule.

The screenshot displays the 'Transformation Rules - TXM\_BankBOA' interface. On the left, a tree view shows 'Rule Groups' including various dimension types (Entity, Scenario, Time, View, Account, Flow, IC, UD1-UD8, Derivative) and a 'Lookup' group containing several rules, with 'TXM\_BankBOA' selected. The main pane shows the configuration for this rule:

- General:** Name: TXM\_BankBOA, Description: BankBOA\_Entity
- Security:** Access Group: Everyone, Maintenance Group: Everyone
- Settings:** Cube Dimension Name: (Lookup)

Below the settings is a table with the following data:

Source Value	Description	Target Value	Order
HHBranch123USA		Heights	0
MONTBranch6758CA		68	1
STHHBranch125USA		South	2
BN#123456789		10003	4

# Transaction Matching

3. Create a parser rule and update it to call the lookup table created in step 2.

The screenshot shows the 'Business Rules - TransformSource\_PreImport\_Lookup' interface. On the left is a tree view of various parser rules. The main area displays the 'Formula' tab with a C# code editor. The code defines a function 'Main' that takes 'ByVal si As SessionInfo, ByVal globals As BRGlobals, ByVal api As ParserDimension, ByVal args As ParserArgs' as input. It initializes a return value, defines a lookup rule group named 'TXM\_BankBOA', and performs a lookup on the source value. If a match is found, it returns the source value; otherwise, it returns an empty string. The code is as follows:

```

6 Imports System.Globalization
7 Imports System.Linq
8 Imports Microsoft.VisualBasic
9 Imports System.Windows.Forms
10 Imports OneStream.Shared.Common
11 Imports OneStream.Shared.Icf
12 Imports OneStream.Shared.Engine
13 Imports OneStream.Shared.Database
14 Imports OneStream.Stage.Engine
15 Imports OneStream.Stage.Database
16 Imports OneStream.Finance.Engine
17 Imports OneStream.Finance.Database
18
19 Namespace OneStream.BusinessRule.Parser.TransformSource_PreImport_Lookup
20 Public Class MainClass
21 Public Function Main(ByVal si As SessionInfo, ByVal globals As BRGlobals, ByVal api As ParserDimension, ByVal args As ParserArgs) As Object
22 Try
23
24 'Init Return Value
25 Dim retValue As String = String.Empty
26
27 'Provide name of lookup rule group
28 Dim transformationLookupGroup As String = "TXM_BankBOA"
29
30 'Define if passthrough should be used True/False. This means that if the rule is not found for the source value, the return value
31 ' for TransformText will be same as the source value.
32 Dim usePassthroughIfLookupNotFound As Boolean = True
33
34 If args.Value.Length > 0 Then
35 Try 'Exception is thrown if ruleGroup is not found
36 'perform lookup of source value in specified lookup rule
37 retValue = BRApi.Utilities.TransformText(si, args.Value, transformationLookupGroup, usePassthroughIfLookupNotFound)
38 Catch exRuleGroupNotFound As Exception
39 'return the source value
40 retValue = args.Value
41 End Try
42 End If
43
44 Return retValue
45 Catch ex As Exception
46 Throw ErrorHandler.LogWrite(si, New XfException(si, ex))
47 End Try
48 End Function
49 End Class
50 End Namespace

```

4. Update the data source mapping for Entity and Account to call the parser rule.

The screenshot shows the 'Data Sources - TXM\_BankBOA (HoustonAccounts)' interface. The top part displays a table of transactions with columns: Description, Amount, CheckNo, Check Date, Account No., Location, Ref #, Proc Date, and Statement. Below the table is a configuration panel for the 'TXM\_BankBOA' data source. The 'Position Settings' section is expanded, showing the 'Column Number' set to 5. The 'Logical Expression And Override Settings' section is also expanded, showing the 'Logical Operator' set to 'Business Rule' and the 'Logical Expression' set to 'TransformSource\_PreImport\_Lookup'.

Description	Amount	CheckNo	Check Date	Account No.	Location	Ref #	Proc Date	Statement
2 BOA Disbursement	-5431.16	520476	3/8/2022	BN#123456789	HHB ranch123USA	1243787	3/8/2022	4/5/2022
3 BOA Disbursement	-5467.16	510536	3/22/2022	BN#123456789	HHB ranch123USA	1243844	3/22/2022	4/5/2022
4 BOA Disbursement	-5410.16	510441	3/3/2022	BN#123456789	HHB ranch123USA	1243768	3/3/2022	4/5/2022
5 BOA Disbursement	-5494.16	510581	3/31/2022	BN#123456789	HHB ranch123USA	1243880	3/31/2022	4/5/2022
6 BOA Disbursement	-5491.16	520576	3/28/2022	BN#123456789	HHB ranch123USA	1243867	3/28/2022	4/5/2022
7 BOA Disbursement	-5461.16	520526	3/10/2022	BN#123456789	HHB ranch123USA	1243827	3/18/2022	4/5/2022
8 BOA Disbursement	-65955.61	5201534	3/10/2022	BN#123456789	HHB ranch123USA	1243797	3/10/2022	4/5/2022
9 BOA Disbursement	-5419.16	510456	3/6/2022	BN#123456789	HHB ranch123USA	1243780	3/6/2022	4/5/2022
10 BOA Disbursement	-66102.61	5201597	3/31/2022	BN#123456789	HHB ranch123USA	1243881	3/31/2022	4/5/2022
11 BOA Disbursement	-65962.61	5201537	3/11/2022	BN#123456789	HHB ranch123USA	1243801	3/11/2022	4/5/2022
12 BOA Disbursement	-66011.61	5201558	3/18/2022	BN#123456789	HHB ranch123USA	1243829	3/18/2022	4/5/2022
13 BOA Disbursement	-5494.16	520581	3/29/2022	BN#123456789	HHB ranch123USA	1243871	3/29/2022	4/5/2022
14 BOA Disbursement	-5500.16	63541	3/31/2022	BN#123456789	HHB ranch123USA	1243755	3/31/2022	4/5/2022
15 N S F	-8	SF65	1/31/2022	BN#123456789	HHB ranch123USA	1243886	1/31/2022	4/5/2022

# Transaction Matching

## Load File

	A	B	C	D	E	F	G	H	I
1	Description	Amount	CheckNo	Check Date	Account No.	Location	Ref #	Proc Date	Statement Date
2	BOA Disbursement	-5431.16	520476	3/8/2022	BN#123456789	HHBranch123USA	1243787	3/8/2022	4/5/2022
3	BOA Disbursement	-5467.16	510536	3/22/2022	BN#123456789	HHBranch123USA	1243844	3/22/2022	4/5/2022
4	BOA Disbursement	-5410.16	510441	3/3/2022	BN#123456789	HHBranch123USA	1243768	3/3/2022	4/5/2022
5	BOA Disbursement	-5494.16	510581	3/31/2022	BN#123456789	HHBranch123USA	1243880	3/31/2022	4/5/2022
6	BOA Disbursement	-5491.16	520576	3/28/2022	BN#123456789	HHBranch123USA	1243867	3/28/2022	4/5/2022
7	BOA Disbursement	-5461.16	520526	3/18/2022	BN#123456789	HHBranch123USA	1243827	3/18/2022	4/5/2022
8	BOA Disbursement	-65955.61	5201534	3/10/2022	BN#123456789	HHBranch123USA	1243797	3/10/2022	4/5/2022
9	BOA Disbursement	-5419.16	510456	3/6/2022	BN#123456789	HHBranch123USA	1243780	3/6/2022	4/5/2022
10	BOA Disbursement	-66102.61	5201597	3/31/2022	BN#123456789	HHBranch123USA	1243881	3/31/2022	4/5/2022

## Results

TXM\_BanktoGLBank\_BOA - ActualTXM - Apr 2022

Import Completed

Load And Transform | Retransform | Clear | Complete Workflow | Row Type Filter: All Rows

Status	Amount (Raw)	SourceID	HoustonEntiti	Time	View	HoustonAcco	Label	Flows	IC	CostCenters	HoustonProdi	HoustonSales
(All)	-5431.16	BankApr2021	Heights	(Current)	YTD	10003		None	None	None	None	None

Data Loads

- BankApr2021
  - KDarren
  - 8/3/2021 3:21 PM
  - BankApr2021\_XFC32731:

# Integration

OneStream Financial Close consists of these integrated solutions:

- Transaction Matching
- Account Reconciliations


Use this check list to integrate the OneStream Financial Close solutions.

Step	Task	See
1	Enable integration	<a href="#">Enabling Integration</a>
2	Assign Match Sets	<a href="#">Assigning Match Sets</a>
3	Map Detail Item information	<a href="#">Mapping Detail Item Information</a>

## Enabling Integration

**NOTE:** After you enable integration with Transaction Matching and save the settings, you cannot disable the integration.

To enable integration between solutions in OneStream Financial Close:

1. In Account Reconciliations, click **Show Settings Page**  .
2. On the **Global Setup > Global Options** page, click **Enable** next to **Transaction Matching Integration**.

## Integration

3. Confirm the integration and then click **Save**.

ONESTREAM FINANCIAL CLOSE - ACCOUNT RECONCILIATIONS

SETTINGS (Clubs, ActualAR, 2022M1)

Global Setup | Global Options | Global Defaults

Control Lists

Templates

Access Control

Certifications

Uninstall

Security Role [Manage Recon Setup]: Administrators

Security Role [Recon View Only]: Administrators

All Recons Require R-Doc:

Enable Mass Actions: Prepare  Approve

Transaction Matching Integration: Enabled ←

Process Recons On Complete Workflow:

See [Global Setup](#).


## Assigning Match Sets

In Account Reconciliations, assign one or more match sets to a reconciliation in the inventory. After assigning match sets, you can filter the reconciliation inventory by the match sets assigned.

You can assign match sets to a single reconciliation or you can select multiple reconciliations and assign match sets to the entire selection.

**NOTE:** You cannot assign match sets to account groups. Child reconciliations can be assigned to a match set, but the assigned balance does not display unless the reconciliation is removed from the account group.

To assign match sets:

1. In Account Reconciliations, click **Show Administration Page**  to display the Reconciliation Inventory.
2. To filter the inventory to view where Match Sets have been assigned, from the **Assigned Match Sets** filter, select one or more match sets to include in the list or select one of these options:

## Integration

- **(Full Inventory):** All reconciliations.
- **(All):** Reconciliations that have a match set assigned.
- **(None):** Reconciliations that do not have a match set assigned.

3. Select one or more reconciliations and then click **Match Set**.

ONESTREAM FINANCIAL CLOSE - ACCOUNT RECONCILIATIONS

ADMINISTRATION - Inventory (Clubs, ActualAR, 2022M1)

Type: All Account Group: All Access Group: All Assigned Match Sets: (Full Inventory)

Definition Inventory Update Tracking BalCheck AutoRec

Defer Refresh

Reconciliation Inventory

WF Profile	Recon Scenario	Required	T.Account	S.Account	T.Entity	S.Entity	Account	Local C	Reporting	MC Effect	
<input type="checkbox"/>	Houston.Import	ActualAR	<input type="checkbox"/>	10100	10003	Houston Heights	Heights	USD	USD	USD	(Not En
<input type="checkbox"/>	Houston.Import	ActualAR	<input type="checkbox"/>	10100	10004	Houston Heights	Heights	USD	USD	USD	(Not En
<input type="checkbox"/>	Houston.Import	ActualAR	<input type="checkbox"/>	10100	11234	Houston Heights	Heights	USD	USD	USD	(Not En
<input checked="" type="checkbox"/>	Houston.Import	ActualAR	<input type="checkbox"/>	10100	11238	Houston Heights	Heights	USD	USD	USD	(Not En
<input type="checkbox"/>	Houston.Import	ActualAR	<input type="checkbox"/>	10300	11085	Houston Heights	Heights	USD	USD	USD	(Not En
<input type="checkbox"/>	Houston.Import	ActualAR	<input type="checkbox"/>	10400	11090	Houston Heights	Heights	USD	USD	USD	(Not En
<input type="checkbox"/>	Houston.Import	ActualAR	<input type="checkbox"/>	11000	11200	Houston Heights	Heights	USD	USD	USD	2018M

247 Rows Page 1 of 5

Match Set

4. If you selected a single reconciliation, from **Available Match Sets**, select one or more match sets to assign to the reconciliation, click **Add**, and then click **Close**.

If you selected multiple reconciliations, select the checkbox next to the match sets you want to assign to the reconciliations, click **Add**, click **OK**, and then click **Close**.

## Mapping Detail Item Information

Detail item mapping is done in Transaction Matching. If a match set is assigned to a reconciliation, you must map each data set within the match set to a reconciliation.

Keep these mapping requirements in mind:


- If the account reconciliation instance is single currency (multi-currency is not enabled), then Local Amount and Item Name must be mapped.
- If multi-currency is enabled and all reconciliations within the Reconciliation Inventory are multi-currency, then Detail Amount and Item Name must be mapped.

## Integration

---

- If multi-currency is enabled and single and multi-currency reconciliations exist in the Reconciliations Inventory, then Local Amount, Detail Amount, and Item Name must be mapped.

To map detail item information:

1. In Transaction Matching, click **Show Match Set Administration** page .
2. Click **Data Sets** and then select a data set.
3. Align the **Name** column with the alias for the Account Reconciliation column. For example, Attribute 17 (Date) is mapped to the Check Date in Account Reconciliation.

GL10003 - Fields							
Name	Alias	Column Order	Display Format	Summary 1	Summary 2	Summary 3	Detail Item Mapping
WF Time	Load Period	9		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	(Unassigned)
Attribute Value 1	Detail Amt	3	N2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Detail Amount
Entity	Entity	7		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	(Unassigned)
S.Entity	Src Entity	7		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	(Unassigned)
Attribute 18 (Date)	Post Date	2	yyyy-MM-dd	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	(Unassigned)
Attribute 17 (Date)	Check Date	1	yyyy-MM-dd	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Transaction Date
Amount	Check Amt	3	N2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Local Amount
Account	Account	8		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	(Unassigned)
S.Account	Src Acct	8		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	(Unassigned)
Attribute 3	JE Num	6		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Reference 2
Attribute 2	Invoice	5		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Reference 1
Attribute 1	Check No	4		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Item Name

4. In the **Detail Item Mapping** column, make selections to map which columns in Transaction Matching populate the detail item in Account Reconciliations. For example, the check number will be displayed in the **Item Name** column.

## Create Detail Items

There are two ways to create detail items in OneStream Financial Close:

- [From Transaction Matching](#)
- [From Account Reconciliations](#)

Both methods create detail items using Transaction Matching and detail items are defined as X item types.

# From Transaction Matching

From the **Transactions** page, you can create detail items from matched, unmatched, or unmatched (as of period end) transactions and send them directly to Account Reconciliations. Detail items can be created by data set for selected transactions or all available transactions. Available transactions are those transactions that have not already been used to create a detail item in the current workflow period. Transactions can only be used once per workflow period to create a detail item and cannot be deleted if used to create a detail item in any workflow period. You can also create detail items for multiple reconciliations at once.

Aggregation can be done by:

- Total (single sum amount)
- Transaction Date (recommended)
- Item Name

**NOTE:** The user creating the detail items must have access and entitlements to both Transaction Matching and Account Reconciliations.

These actions are not allowed while detail items are being created:

- Processing in Account Reconciliations
- Completing Workflow in Account Reconciliations
- Running Process in Transaction Matching for the match set
- Manual matching and unmatching in Transaction Matching for the match set

To create detail items:

1. From **Transaction Status**, select **Matched** , **Unmatched**, or **Unmatched (As of Period End)**.
2. From the **Reconciliation Link** drop down, select an option to filter the list of transactions:

- **(All)**: Displays all transactions.
  - **No Detail Item**: Displays transactions that have not been used to create a detail item in the current workflow period. Use this option to ensure that you do not select a transaction that has already been used to create a detail item.
  - **Detail Item Exists**: Displays transactions that have been used to create a detail item in the current workflow period.
3. If you selected **Unmatched** or **Unmatched (As of Period End)**, go to the next step. If you selected **Matched**, make selections from these filters to update the displayed transactions:
- **Match Reason Code**: Select one or more reason codes or **All**.
  - **Match Period**: Select **All**, **Current Period**, or **Future Periods**
  - **Import Period**: Select one or more import periods or **All**.
4. Select the checkbox next to one or more transactions for which you want to create a detail item.

**NOTE:** The selected transactions must all be of the same currency level to create one detail item. Transactions are first aggregated by currency level.

5. Click **Create Items**.

The screenshot shows a 'Create Detail Items' dialog box with two sections for different data sets. The top section is for 'GL10003 (DS1)' and the bottom section is for 'BNKBOA (DS2)'. Each section has a 'Transactions' dropdown menu (set to 'Selected'), a 'Reverse Sign' checkbox (unchecked), an 'Item Name' text box (containing '[Check No]'), an 'Aggregation' dropdown menu (set to '(None)'), an 'Item Type' dropdown menu (set to 'Matching\_DS1' for DS1 and 'Matching\_DS2' for DS2), a 'Reference 1' text box (containing '[Invoice]' for DS1 and '[Descrip]' for DS2), and a 'Reference 2' text box (containing '[JE Num]' for DS1 and '[BnkAcct#\_Bnk Location]' for DS2). At the bottom right, there are 'Create' and 'Cancel' buttons.

6. For each data set, make selections from these options:

- **Transactions:** Options are: **Selected**, **All**, or **None**.

**CAUTION:** **All** creates detail items for all transactions in the data set, not just the transactions displayed on the first page.

- **Reverse Sign:** Reverses the sign from positive to negative or vice versa.
- **Item Name:** Defaults to the mapped Item Name field and can be changed. If left blank, it defaults to "Transaction Matching Item" as the item name.
- **Aggregation:** Select from these options:
  - **None:** Creates a detail item for each transaction.
  - **Total:** Creates one detail item for all transactions in the data set.

## Integration

- **Item Name:** Creates a detail item for each unique item name.
- **Transaction Date:** Creates a detail item for each transaction date.
- **NOTE:** Regardless of the aggregation selected, transactions of different currencies will not aggregate into a single line item. For example, if you have 10 CAD and 10 USD transactions and selected total there would be two detail line items created, one for USD total and one for CAD total.
- **Item Type:** Defaults to **Matching\_DS1**, **Matching\_DS2**, or **Matching\_DS3** depending on the associated data set. You can change this to be any item type in the control list.
- **Reference 1:** Defaults to the mapped Reference 1 fields. If you make any changes in this field, the value that you input becomes Reference 1.
- **Reference 2:** Defaults to the mapped Reference 2 fields. If you make any changes in this field, the value that you input becomes Reference 2.

7. Click **Create**.

In Account Reconciliations, the detail items display as X item types.

					S.Account: 16305	S.Entity: HOUSTON	Tracking Detail:	
					T.Account: 16305	T.Entity: Houston		
					Detail Items			
<input type="checkbox"/>	O	R	Amount	Currency	Account (CAD)	Local (USD)	Reporting (EUR)	
<input type="checkbox"/>	ALR	X	689.83	CAD	758.81	689.83	862.29	
<input type="checkbox"/>	ALR	X	836.04	EUR	919.64	836.04	1,045.05	
<input type="checkbox"/>	ALR	X	795.86	CAD	875.45	795.86	994.83	
<input type="checkbox"/>	ALR	X	487.26	CAD	535.99	487.26	609.08	
<input type="checkbox"/>	ALR	X	600.95	USD	661.04	600.95	751.19	
<input type="checkbox"/>	ALR	X	250.03	GBP	275.03	250.03	312.54	

## From Account Reconciliations

To be able to pull transactions into Account Reconciliations, the Tracking Level Dimensions must be added to the Transaction Matching Data Set Definition. For more information, see "Detail Item Integration Addendum" on page 186

## Integration


---

From the Reconciliations Workspace, you can create detail items by matching transactions and pulling them into Account Reconciliations. Transactions are filtered to show only those that relate to the reconciliation and that are available for the current period. Detail items created this way are defined as X item types and can be auto-reconciled. See [AutoRec](#).

**NOTE:** X item types created with overrides do not require supporting documentation. The ability to drill back to Transaction Matching provides the required support.

To create detail items:

1. Select a reconciliation and then click **Match Item**.

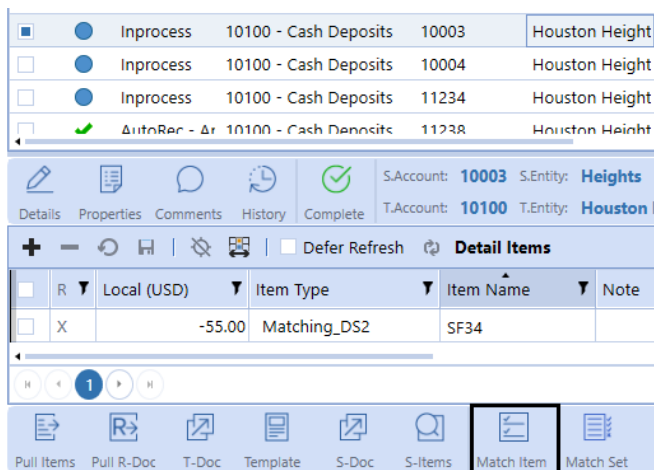

2. Make selections in the **Create Detail Item** dialog. These selections filter the transactions within the match set to only those that relate to the selected reconciliation. In other words, where the tracking level in Account Reconciliations is the same as the tracking level in Transaction Matching.
  - Select the **Match Set** to use.
  - Select the **Transaction Status**: Matched, Unmatched, or Unmatched (As of Period End)

3. For each data set, make selections from these options:

- **Transactions:** Options are: **Selected**, **All**, or **None**.

**CAUTION:** All creates detail items for all transactions in the data set, not just the transactions displayed on the first page.

- **Reverse Sign:** Reverses the sign from positive to negative or vice versa.
- **Item Name:** Defaults to the mapped Item Name field and can be changed. If left blank, it defaults to "Transaction Matching Item" as the item name.
- **Aggregation:** Select from these options:

**NOTE:** Regardless of the aggregation selected, transactions of different currencies will not aggregate into a single line item. For example, if you have 10 CAD and 10 USD transactions and selected total there would be two detail line items created, one for USD total and one for CAD total.

## Integration

- **None:** Creates a detail item for each transaction.
- **Total:** Creates one detail item for all transactions in the data set.
- **Item Name:** Creates a detail item for each unique item name.
- **Transaction Date:** Creates a detail item for each transaction date.
- **Item Type:** Defaults to **Matching\_DS1**, **Matching\_DS2**, or **Matching\_DS3** depending on the associated data set. You can change this to be any item type in the control list.
- **Reference 1:** Defaults to the mapped Reference 1 fields. If you make any changes in this field, the value that you input becomes Reference 1.
- **Reference 2:** Defaults to the mapped Reference 2 fields. If you make any changes in this field, the value that you input becomes Reference 2.

#### 4. Select the transactions to include in the detail item and then click **Create Items**

The screenshot shows the 'Create Detail Item' interface with the following details:

- Match Set:** TXM\_BanktoGLActualTXM
- Transaction Status:** Unmatched
- Transactions:** Selected
- Reverse Sign:**
- Item Name:** [Check No]
- Aggregation:** (None)
- Item Type:** Matching\_DS1
- Reference 1:** [Invoice]
- Reference 2:** [JE Num]

GL10003 (DS1)					
Transaction	Check Date	Post Date	Check Amt	Detail Amt	
T210608_000106159	2021-11-17	2021-11-17	-128,000.45	-128,000.45	
T210608_000106320	2021-12-14	2021-12-14	-588.32	-588.32	

BNKBOA (DS2)					
Transaction	Load Period	Src Entity	Entity	Src Acct	De

Check Amt	GL10003 (DS1)	BNKBOA (DS2)	DS1 to DS2
	-128,000.45	0.00	-128,000.45

At the bottom right, there is a 'Create Items' button with a checkmark icon and a 'Cancel' button with an 'X' icon. An arrow points to the 'Create Items' button.

## Integration

The transaction is added as a detail item to the reconciliation.

Detail Items										
	R	Local (USD)	Item Type	Item Name	Note	Booked Period	Transaction Date	Aging	Ref 1	Ref 2
<input type="checkbox"/>	X	-128,000.45	Matching_DS1	5001598		2022M1	11/17/2021 12:00:00 AM	75	75789	3053675
<input type="checkbox"/>	X	-55.00	Matching_DS2	SF34		2022M1	1/31/2022 12:00:00 AM	0	Bank Fee	BN#123456789


## Drilling Back to Transactions

From the Account Reconciliation workspace, you can select an X item type and drill back to the transaction detail.

**NOTE:** You can delete detail items (X item types) that have been pulled from Transaction Matching into Account Reconciliations. Doing so will allow the transaction to be used again in the current period, as it is no longer associated to a reconciliation. Select the item, click the minus sign, and then click **Save**. The transaction is removed and can be used to create a new detail item in the current workflow period.

To drill back:


1. Select an X item type detail item and then click **Drill Back**.

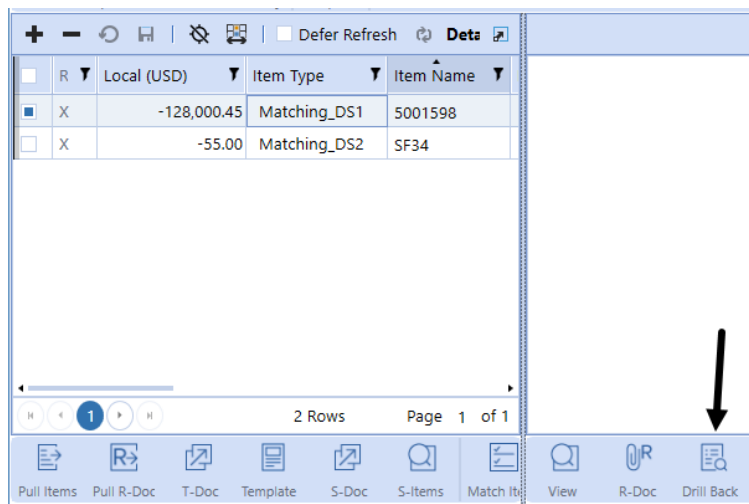

The transactional detail from Transaction Matching displays.

## Integration

---

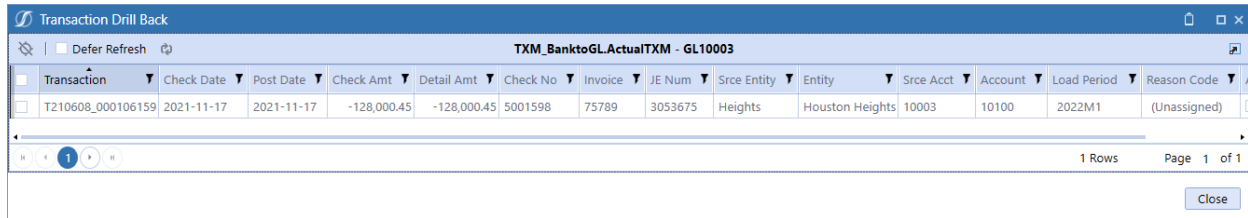

The screenshot shows a 'Transaction Drill Back' window with a table of transaction data. The window title is 'Transaction Drill Back' and the subtitle is 'TXM\_BanktoGLActualTXM - GL10003'. The table has columns for Transaction, Check Date, Post Date, Check Amt, Detail Amt, Check No, Invoice, JE Num, Srce Entity, Entity, Srce Acct, Account, Load Period, and Reason Code. The first row contains the following data: Transaction: T210608\_000106159, Check Date: 2021-11-17, Post Date: 2021-11-17, Check Amt: -128,000.45, Detail Amt: -128,000.45, Check No: 5001598, Invoice: 75789, JE Num: 3053675, Srce Entity: Heights, Entity: Houston Heights, Srce Acct: 10003, Account: 10100, Load Period: 2022M1, Reason Code: (Unassigned). The table footer shows '1 Rows' and 'Page 1 of 1'. There is a 'Close' button in the bottom right corner.

Transaction	Check Date	Post Date	Check Amt	Detail Amt	Check No	Invoice	JE Num	Srce Entity	Entity	Srce Acct	Account	Load Period	Reason Code
T210608_000106159	2021-11-17	2021-11-17	-128,000.45	-128,000.45	5001598	75789	3053675	Heights	Houston Heights	10003	10100	2022M1	(Unassigned)

## Navigating to Match Sets

From the Reconciliation Workspace, you can navigate to match sets in Transaction Matching.

1. Select a reconciliation that has associated match sets.
2. Click **Match Set**.

## Integration

<input type="checkbox"/>	<input checked="" type="checkbox"/>	Approved	10100 - Cash Deposits	10003	Frankfurt	FRANKFU	-8,561.10	EUR
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Inprocess	10100 - Cash Deposits	10001	Houston Height	Heights	0.00	---
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Inprocess	10100 - Cash Deposits	10002	Houston Height	Heights	0.00	---
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Inprocess	10100 - Cash Deposits	10003	Houston Height	Heights	0.00	---
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Inprocess	10100 - Cash Deposits	10004	Houston Height	Heights	0.00	---
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Inprocess	10100 - Cash Deposits	11234	Houston Height	Heights	0.00	---
<input type="checkbox"/>	<input checked="" type="checkbox"/>	AutoRec - A	10100 - Cash Deposits	11238	Houston Height	Heights	0.00	---
<input type="checkbox"/>	<input checked="" type="checkbox"/>	Inprocess	10100 - Cash Deposits	10001	Montreal	68	329,113.22	CAD

Details
Properties
Comments
History
Unapprove

S.Account: **10003** S.Entity: **FRANKFU** Tracking Detail:  
 T.Account: **10100** T.Entity: **Frankfurt**

+ -
🔄
📄
🔍
🔄

Detail Items

<input type="checkbox"/>	O	R	Amou	Currency	Accou	Local (EUR)	Reporting (USD)	Item Type	Item Name
<input type="checkbox"/>		T	-25.63	EUR	-25.63	-25.63	-28.19	Explained Item	197528
<input type="checkbox"/>		T	-624.78	EUR	-624.78	-624.78	-687.26	Explained Item	197695
<input type="checkbox"/>		T	-345.16	EUR	-345.16	-345.16	-379.68	Explained Item	197862
<input type="checkbox"/>		T	-123.75	EUR	-123.75	-123.75	-136.13	Explained Item	198029
<input type="checkbox"/>		T	-722.90	EUR	-722.90	-722.90	-795.19	Explained Item	198196
<input type="checkbox"/>		T	-443.28	EUR	-443.28	-443.28	-487.61	Explained Item	198363
<input type="checkbox"/>		T	-221.87	EUR	-221.87	-221.87	-244.06	Explained Item	198530
<input type="checkbox"/>		T	-821.02	EUR	-821.02	-821.02	-903.12	Explained Item	198697

🏠
⏪
1
⏩
🏠

📄
📄
📄
📄
📄
📄
📄
📄

- If prompted, select the match set in Transaction Matching that you want to navigate to. If only one match set is applicable, the Transactions page opens.

## Detail Item Integration Addendum

Transaction Matching transactions are used to create detail items in the Account Reconciliations solution. The following examples demonstrate how the selections in the Create Detail Items dialog box determine the information in the detail item that gets created.

## Mapping

To use Transaction Matching transactions to create detail items in Account Reconciliations the data sets in Transaction Matching need to be assigned to Account Reconciliations fields.

Bank - Fields							
Name	Alias	Column Order	Display Format	Summary 1	Summary 2	Summary 3	Detail Item Mapping
S.Account		1		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	(Unassigned)
Account		2		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	(Unassigned)
S.Entity		3		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	(Unassigned)
Entity		4		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	(Unassigned)
S.UD1		5		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	9 Reference 2
UD1		6		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	9 Reference 2
Amount	Local \$	7	N2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	3 Local Amount
Attribute Value 1	Account \$	7	N2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	4 Account Amount
Attribute Value 2	Reporting \$	7	N2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	5 Reporting Amount
Attribute Value 3	Detail \$	7	N2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1 Detail Amount
Attribute 1	Currency	8		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	2 Currency Type
Attribute 2	Invoice	9		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	7 Item Name
Attribute 3	CheckNo	10		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	8 Reference 1
Attribute 4	JE	11		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	8 Reference 1
Attribute 17 (Date)	T.Date	12		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	6 Transaction Date

1. **Detail Amount:** If multi-currency is enabled, identifies the amount to be pulled in as the Account Reconciliation detail amount.
2. **Currency Type:** Detail Amount currency type used when multi-currency is enabled.
3. **Local Amount:** If multi-currency is not enabled, identifies the detail item amount.
4. **Account Amount:** Overrides what would be calculated for the account amount if multi-currency is enabled.
5. **Reporting Amount:** Overrides what would be calculated for the reporting amount if multi-currency is enabled.
6. **Transaction Date:** Date of the transaction and is dependent on selections made when creating a detail item.

## Integration

---

7. **Item Name:** Default value for item name. It can be overridden and is dependent on the selections made when creating a detail item.
8. **Reference 1:** Concatenates up to two fields and is used to provide additional information. It can be overridden and is dependent on selections made when creating a detail item.
9. **Reference 2:** Concatenates up to two fields and is used to provide additional information. It can be overridden and is dependent on selections made when creating a detail item.

## Selections

The screenshot shows a 'Create Detail Items' dialog box with two sections: 'Bank (DS1)' and 'GL (DS2)'. Each section has a 'Transactions' dropdown (set to 'Selected'), a 'Reverse Sign' checkbox, an 'Item Name' field (containing '[Invoice]'), an 'Aggregation' dropdown (set to '(None)'), and an 'Item Type' dropdown (set to 'Matching'). The 'Reference 1' field contains '[CheckNo\_JE]' and the 'Reference 2' field contains '[U1\_U1T]'. Green callout bubbles labeled A through G point to these specific fields. At the bottom right, there are 'Create' and 'Cancel' buttons.

- A. **Transactions:** The transactions to use to create the detail items. Options are: **Selected**, **All**, or **None**.

**NOTE:** **All** creates detail items with all transactions available in the match set, not just the transactions displayed on the first page.

- B. **Reverse Sign:** Select to change the sign for the detail items from positive to negative (or vice versa).
- C. **Item Name:** Defaults to the mapped Item Name field. If you make any changes in this field, the value that you input becomes the item name.

- D. **Aggregation:** Used to group multiple transactions into a detail item based on the type of aggregation selected.

**NOTE:** Detail items never combine transactions of different currencies. Aggregation level overrides the mapped fields for Item Name, Reference 1, Reference 2 and Transaction Date.

- **None:** This selection creates a detail item for each transaction.
  - **Item Name** – Input from this field in the dialog.
  - **Reference 1** and **Reference 2** – Input from these fields in the dialog.
  - **Transaction Date** – Date of the transaction.
- **Total:** This selection creates one detail item for all transactions in the data set
  - **Item Name** – Displays as “Transaction Matching Item”.
  - **Reference 1** – Name of the Data Set, Transaction Status, and reason codes (if matched) (for example, Bank;Matched;ReasonCode:Immaterial,DateVariance)
  - **Reference 2** – Selection of transactions and aggregation level (for example, Selected;Total)
  - **Transaction Date** – Defaults to end of the period.
- **Item Name:** Creates one detail item for each unique item name.
  - **Item Name** – Input from this field in the dialog.
  - **Reference 1** – Name of the data set, transaction status, and reason codes (if matched) (for example, Bank;Matched;ReasonCode:Immaterial,DateVariance)
  - **Reference 2** – Selection of transactions and aggregation level (for example, Selected;Total)
  - **Transaction Date** – Defaults to end of the period.
- **Transaction Date:** Creates one detail item for each transaction date.

- **Item Name** – Displays as “Transaction Matching Item.”
  - **Reference 1** – Name of the data set, transaction status, and reason codes (if matched) (for example, Bank;Matched;ReasonCode:Immaterial,DateVariance)
  - **Reference 2** – Selection of transactions and aggregation level (for example. Selected;Total)
  - Transaction Date – The date of the transaction.
- E. **Item Type:** Defaults to **Matching\_DS1**, **Matching\_DS2**, or **Matching\_DS3** depending on the associated data set. You can change the item type to be any item type in the control list.
- F. **Reference 1:** Defaults to the mapped Reference 1 field. If you make any changes in this field, the value that you input becomes Reference 1.
- G. **Reference 2:** Defaults to the mapped Reference 2 field. If you make any changes in this field, the value that you input becomes Reference 2.

## Scheduling Data Management Jobs

You can schedule data management jobs to create detail items from Transaction Matching. See *Task Scheduler* section of the *Design and Reference Guide*.

## Integration

Available parameter names, including default values and valid values are listed below. Parameters with an asterisk are required.

Parameter	Default Value	Valid Value
MatchSetName *		
WFTIMEID *		
TransactionStatus *		Unmatched, Matched
MatchReasonCode	(All)	Any Reason Code name
MatchPeriod	Future	(All), Future, Current
ImportPeriod	(All)	Any WFTIMEID

## Integration

---


Parameter	Default Value	Valid Value
TransactionTypeDS1	(All)	(All), Selected, (None)
ItemNameDS1	Substituted Value	
ReferenceOneDS1	Substituted Value	
ReferenceTwoDS1	Substituted Value	
AggTypeDS1	(None)	(None), Total, ItemName, TransactionDate
RevSignDS1	FALSE	True/False
ItemTypeDS1	Matching_DS1	Any Item Type
TransactionTypeDS2	(All)	(All), Selected, (None)
ItemNameDS2	Substituted Value	
ReferenceOneDS2	Substituted Value	
ReferenceTwoDS2	Substituted Value	
AggTypeDS2	(None)	(None), Total, ItemName, TransactionDate
RevSignDS2	FALSE	True/False
ItemTypeDS2	Matching_DS2	Any Item Type
TransactionTypeDS3	(All)	(All), Selected, (None)
ItemNameDS3	Substituted Value	

## Integration

---

Parameter	Default Value	Valid Value
ReferenceOneDS3	Substituted Value	
ReferenceTwoDS3	Substituted Value	
AggTypeDS3	(None)	(None), Total, ItemName, TransactionDate
RevSignDS3	FALSE	True/False
ItemTypeDS3	Matching_DS3	Any Item Type

# Help and Miscellaneous Information

 This page contains solution documentation.

## Display Settings

OneStream and MarketPlace solutions frequently require the display of multiple data elements for proper data entry and analysis. Therefore, the recommended screen resolution is a minimum of 1920 x 1080 for optimal rendering of forms and reports.

Additionally, OneStream recommends that you adjust the Windows System Display text setting to 100% and do not apply any Custom Scaling options.

## Package Contents and Naming Conventions

The package file name contains multiple identifiers that correspond with the platform. Renaming any of the elements contained in a package is discouraged in order to preserve the integrity of the naming conventions.

**Example Package Name: OFC\_PV7.1.0\_SV101\_PackageContents.zip**

Identifier	Description
OFC	Solution ID
PV7.1.0	Minimum Platform version required to run solution
SV101	Solution version
PackageContents	File name

## Solution Database Migration Advice

A development OneStream application is the safest method for building out a solution with custom tables such as this one. The relationship between OneStream objects such as workflow profiles and custom solution tables is that they point to the underlying identifier numbers and not the object names as seen in the user interface. Prior to the solution configuration and to ensure the identifiers match within the development and production applications, the development application should be a recent copy of the production application. Once the development application is created, install the solution and begin design. The following process below will help migrate the solution tables properly.

**See also:** *Managing a OneStream Environment* in the *Design and Reference Guide*.

## MarketPlace Solution Modification Considerations

A few cautions and considerations regarding modification of MarketPlace solutions:

- Major changes to business rules or custom tables within a MarketPlace solution will not be supported through normal channels as the resulting solution is significantly different from the core solution.
- If changes are made to any dashboard object or business rule, consider renaming it or copying it to a new object first. This is important because if there is an upgrade to the MarketPlace solution in the future and the customer applies the upgrade, this will overlay and wipe out the changes. This also applies when updating any of the standard reports and dashboards.
- If modifications are made to a MarketPlace solution, upgrading to later versions will be more complex depending on the degree of customization. Simple changes such as changing a logo or colors on a dashboard do not impact upgrades significantly. Making changes to the custom database tables and business rules, which should be avoided, will make an upgrade even more complicated.

# Date Grouping Tolerances Appendix

This section explains Date Grouping Tolerances and how to set them up in OneStream. To help explain Date Grouping Tolerances, we'll use two data sets to show how matches work when you have:

- [No date tolerances](#)
- [Post-aggregate date tolerances](#)
- [Pre-aggregate date tolerates](#) (new feature added for the PV710 SV100 release)

These are the data sets we'll use to explain the different scenarios. They both have a list of five transactions containing invoices with dates and amounts.

DS1		
Invoice	Date	Amount
AAAA	2-Jan	100
AAAA	2-Jan	200
AAAA	3-Jan	75
BBBB	3-Jan	200
BBBB	4-Jan	100

DS2		
Invoice	Date	Amount
AAAA	2-Jan	425
AAAA	3-Jan	350
AAAA	3-Jan	25
BBBB	3-Jan	150
BBBB	3-Jan	150

## No Date Tolerances

If we do not apply date tolerances to the data sets then the transactions are grouped by the same invoice and date to get the aggregated amounts. All AAAA invoices on 2-Jan are summed together, as are all AAAA invoices on 3-Jan and all BBBB invoices on 3-Jan.

As noted in the image below, there are no matches across the aggregated amounts. The sum of the AAAA invoices on 2-Jan for DS1 is \$300 while DS2 is \$425. The sum of the AAAA invoices on 3-Jan for DS1 is \$75 while DS2 is \$375. The sum of the BBBB invoices on 3-Jan for DS1 is \$200 while DS2 is \$300.

DS1		
Invoice	Date	Amount
AAAA	2-Jan	100
AAAA	2-Jan	200
AAAA	3-Jan	75
BBBB	3-Jan	200
BBBB	4-Jan	100

DS2		
Invoice	Date	Amount
AAAA	2-Jan	425
AAAA	3-Jan	350
AAAA	3-Jan	25
BBBB	3-Jan	150
BBBB	3-Jan	150

AAAA	2-Jan	300
AAAA	3-Jan	75
BBBB	3-Jan	200


AAAA	2-Jan	425
AAAA	3-Jan	375
BBBB	3-Jan	300

## Post-aggregate Date Tolerances

When we add a post-aggregate date tolerance, of 1 day before and 1 day after the first step is the same as in the previous example: we sum all the transactions by invoice and date. Then we add an additional step of taking the aggregated amounts and applying the date tolerances after the fact.

Let's look at just one of the aggregated amounts in DS1 (the aggregated AAAA invoices on 2-Jan for \$300, which we saw in the previous example is actually made up of two transactions). In applying the date tolerance post grouping we will then look in DS2 for invoice AAAA on 2-Jan for an aggregated amount of \$300 and also look to see if there is this amount for invoice AAAA on a day before (on 1-Jan) or a day after (on 3-Jan).

But if we look at the aggregated amounts for the AAAA invoices we had in our DS2 we see there is no match (they total \$425 or \$375, but not \$300). Again, we just reviewed one of the aggregated amounts, but if we did this for the other aggregated transactions (AAAA invoices on 3-Jan and BBBB invoices on 3-Jan), we would still find no matches.

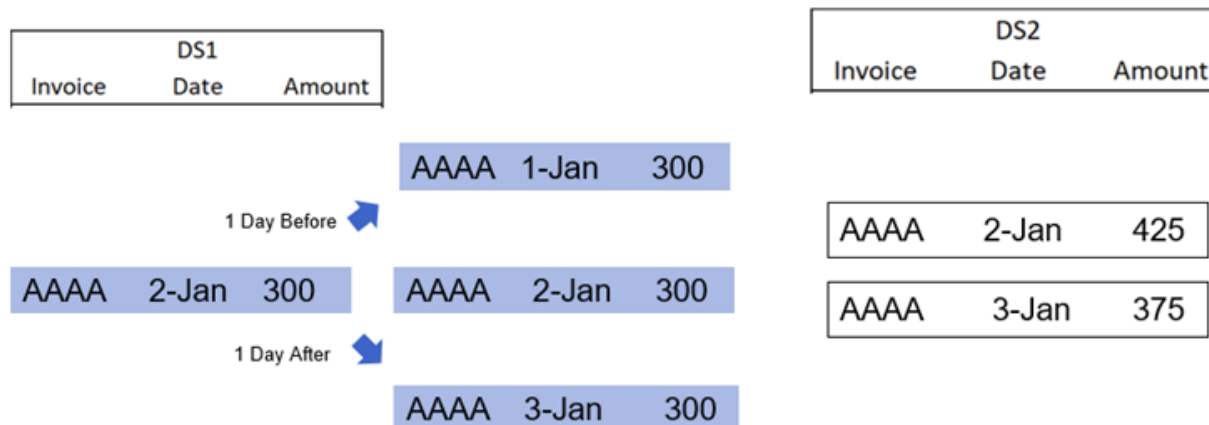

## Pre-aggregate Date Tolerances

For pre-aggregate date tolerances, we need to specify which data set we want the date tolerance applied to. In this example we won't apply a tolerance to DS2 since we have already seen that the transactions easily group by the same invoice and date. So the transactions in DS2 will be aggregated the same as in the previous examples. The AAAA invoices on 3-Jan equal \$375 and the BBBB invoices on 3-Jan equal \$300.

For DS1, we'll apply the pre-aggregate date tolerance of 1 day before and 1 day after. Starting with the first line item for invoice AAAA on 2-Jan for \$100, all invoice AAAAs within one day before (on 1-Jan) and one day after (on 3-Jan) are aggregated. There's nothing on 1-Jan but now the 3-Jan invoice for \$75 is included so the total is \$375.

The same happens for the BBBB invoices. Starting with the BBBB invoice on 3-Jan for \$200, the amounts on 2-Jan and 4-Jan are included. There's nothing on 2-Jan, but now the 4-Jan invoice is included so the total is \$300. As a result, there are two matches, where in the first two scenarios there were no matches.

## Date Grouping Tolerances Appendix

DS1			
Invoice	Date	Amount	
AAAA	2-Jan	100	
AAAA	2-Jan	200	
AAAA	3-Jan	75	
BBBB	3-Jan	200	
BBBB	4-Jan	100	

DS2			
Invoice	Date	Amount	
AAAA	2-Jan	425	
AAAA	3-Jan	350	
AAAA	3-Jan	25	
BBBB	3-Jan	150	
BBBB	3-Jan	150	

AAAA	2-Jan and 3-Jan	375
BBBB	3-Jan and 4-Jan	300

AAAA	3-Jan	375
BBBB	3-Jan	300

## Set Up Date Tolerances

Following are instructions for setting up date tolerances to match the scenarios that were described above.

### Post-aggregate Date Tolerances

To set up the post-aggregate date tolerances as in the [scenario above](#), you set up the date tolerances in the Definition tab and then group by Invoice attribute field in the Grouping tab.



## Pre-aggregate Date Tolerances

To set up the pre-aggregate date tolerances as in the [scenario above](#), you set up the date tolerances in the Grouping tab and group by the Invoice attribute field.

The screenshot shows the configuration interface for a rule named "BanktoGL". The "Grouping" tab is selected, and the rule is identified as "Attributes - GL10003 (DS1)".

Attributes - GL10003 (DS1)			
Field Name			
Invoice			

Below the attributes section, there is a "Dates" section for "Dates - GL10003 (DS1)".

Field Name	Days Before	Days After	
Post Date	1	1	